

C5U1245FT / 5E-PGU 1-24 FT CL

Specifications and rack part list

Batteries	0 units; model not specified
Length	2400.00 mm
Width	745.00 mm
Height	2190.00 mm
Height above battery (catalogue)	2190.00 mm
Width B	675.00 mm
Battery weight	0.00 kg
Rack weight	295.00 kg
Total weight	295.00 kg
Projected surface load	164.99 kg/m²
Load per isolator	73.75 kg
Clearance WR	360.00 mm
Center of gravity: x	373.00 mm
Center of gravity: y	1200.00 mm
Center of gravity: z	1095.00 mm

Rack part list (manufacturer data)

Packages	Article	Length, mm	Width, mm	Height, mm	Weight, kg
3.0	6EPGL3	2175.00	715.00	50.00	20.00
1.0	1204	1225.00	115.00	90.00	14.00
1.0	1206	1225.00	160.00	90.00	21.00
2.0	1204C	1225.00	115.00	90.00	13.00
2.0	1206C	1225.00	160.00	90.00	21.00
2.0	CFP6E12	2095.00	1125.00	15.00	40.00
1.0	CSP6EPGL3	2095.00	745.00	90.00	34.00
2.0	CTPPGL312	1200.00	790.00	15.00	7.00
1.0	CEK6E	2095.00	135.00	15.00	4.00

Source state: empty rack. These are not permissible load ratings.


Row dimensions and weights are copied from the manufacturer catalogue; fasteners are not listed.

Manufacturer images may be shared by several rack lengths.

C5U1245FT / 5E-PGU 1-24 FT CL

Dimension drawing and footprint

Dimension drawing

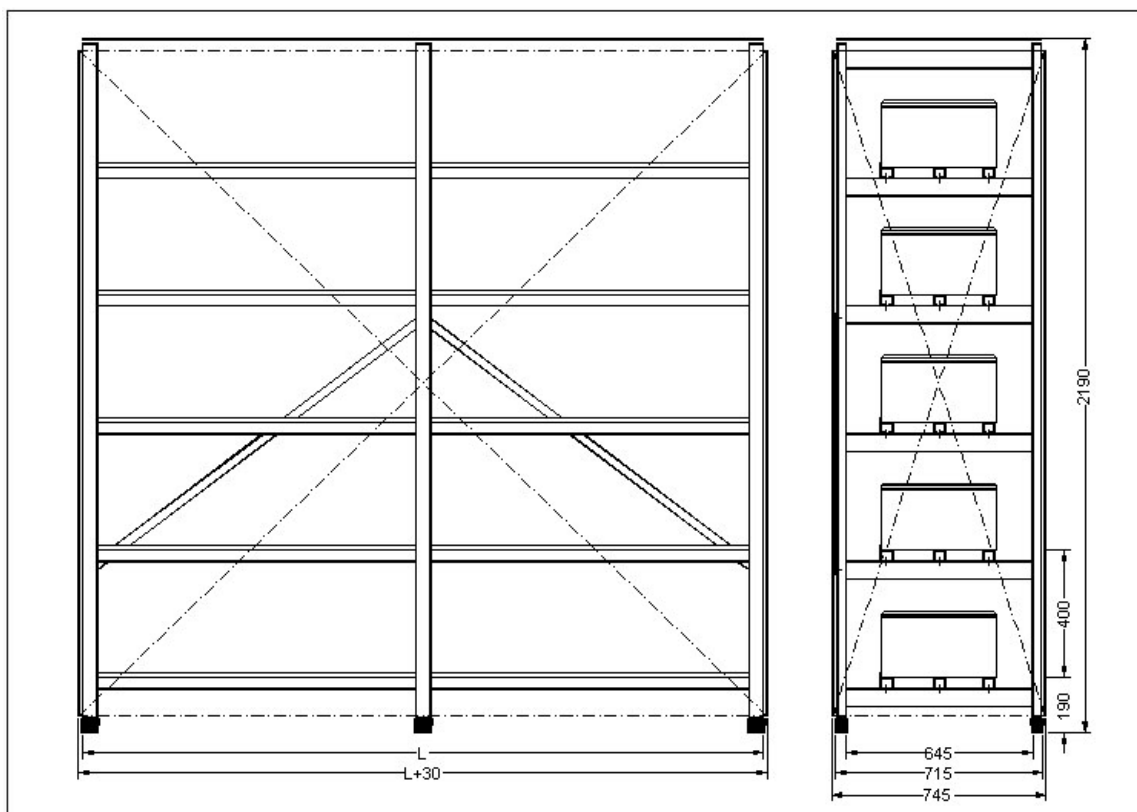

Footprint



L = length; B = width between supports; H = height. Dimensions in mm.

C5U1245FT / 5E-PGU 1-24 FT CL

Visualization and clearance

Manufacturer photo / visualization



Clearance: generic explanatory illustration



The generic illustration does not show your battery arrangement.

C5U1245FT / 5E-PGU 1-24 FT CL

Center of gravity and sources

Center of gravity: generic illustration



Card information

Article: C5U1245FT

Manufacturer catalogue data.

Images are embedded for offline printing.