

Technical specification

High-rate, valve-regulated lead-acid battery with Absorbent Glass Mat (AGM) separator. Sealed and maintenance-free; no water topping-up required.

12 V

6 cells

9 Ah

20 h to 10.5 V at 20°C

40 W/cell

15 min to 1.67 V/cell at 20°C

Electrical performance

Rated capacity	9.0 Ah at 20-hour rate to 10.5 V, 20°C (0.45 A)
15-minute power	40 W/cell at 1.67 V/cell, 20°C
Internal resistance	≤18 mohm, fully charged, at 20°C
Maximum discharge	135 A for 5 seconds at 20°C
Short-circuit current	450 A
Self-discharge	3% average of capacity per month at 20°C
Design life / standby	5 years

Charging and operating conditions

Charge method	Constant voltage
Float / cycle voltage	13.38-13.62 V / 14.40-14.70 V at 20°C
Maximum charge current	3.6 A
Temperature compensation	Float: -19.8 mV/°C per battery; cycle: -30 mV/°C per battery
Operating temperatures	Discharge: -20 to +60°C; charge: -10 to +55°C
Storage temperature	-10 to +50°C
Nominal operating temperature	Not specified; electrical ratings referenced to 20°C

Mechanical specification

Dimensions (L × W × H)	151 ±1 × 65 ±1 × 94 ±1 mm; overall height 100 ±1 mm
Approximate weight	2.45 kg ±5%
Terminal / torque	F2 (6.35 mm); tightening torque not specified
Container	ABS

Construction & applications

High-output AGM battery for standby power applications. Lead-calcium-tin plates, optimized grids and paste support high energy density. Rated power: 40 W per cell for 15 minutes to 1.67 V/cell at 20°C; design life: 5 years.

Battery construction

Positive / negative plates	Lead-calcium-tin alloy
Grid design	Optimized for high power output
Plate paste	Optimized formulation
Internal pressure	Low-pressure operation
Gas management	Gas recombination
Charging modes	Cycle and standby use


Features

- Lead-calcium-tin plate alloy.
- High energy density and power output.
- Low internal pressure; gas recombination.
- Application-specific grid and paste design.
- Sealed, valve-regulated AGM construction.
- Shelf life without recharge: 6 months at 20°C.

Applications

- Uninterruptible power supplies (UPS).
- Telecommunications backup power.
- Power and energy infrastructure.
- Security and fire alarm systems.
- Renewable-energy systems.
- Medical equipment.
- Emergency lighting.
- Data centres.

Dimensions and terminal details / mm

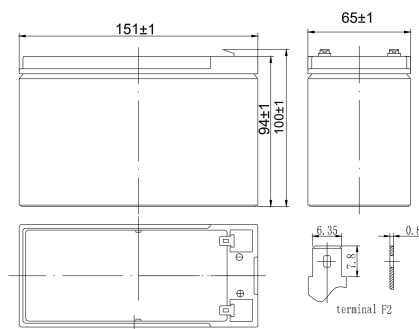

Dimensions and tolerances govern; do not scale the drawing.

Discharge performance

Fully charged battery / 20°C

Constant-current discharge / A

V/cell	5m	10m	15m	30m	45m	1h
1.60	47.00	25.50	18.60	11.70	8.33	6.00
1.67	45.80	25.00	17.90	11.60	8.14	5.87
1.70	43.30	23.80	17.50	11.50	7.95	5.82
1.75	41.40	23.00	17.30	11.30	7.81	5.70
1.80	39.70	22.80	17.00	11.10	7.73	5.60


Constant-power discharge / W per cell

V/cell	5m	10m	15m	30m	45m	1h
1.60	84.80	48.10	40.30	21.90	16.30	11.90
1.67	82.30	47.40	40.00	21.70	16.00	11.80
1.70	78.30	45.80	39.50	21.50	15.80	11.70
1.75	75.40	45.40	39.00	21.30	15.60	11.50
1.80	72.40	45.00	38.80	21.00	15.40	11.30


End voltage is per cell. Multiply W/cell by 6 for power per 12 V battery. Current is not divided by 6. These are average values obtained within three charge/discharge cycles, not guaranteed minimums. Fully charge before testing. Product information may change without notice.

Characteristic curves


Constant-current discharge

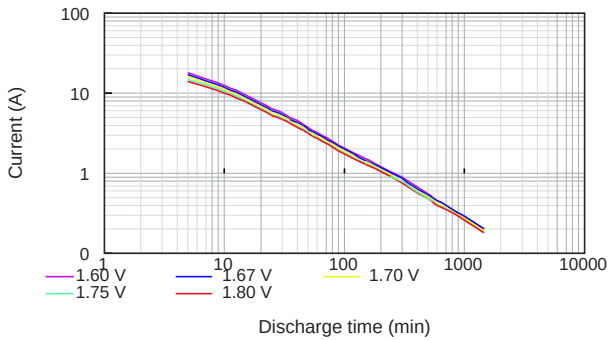


Constant-power discharge

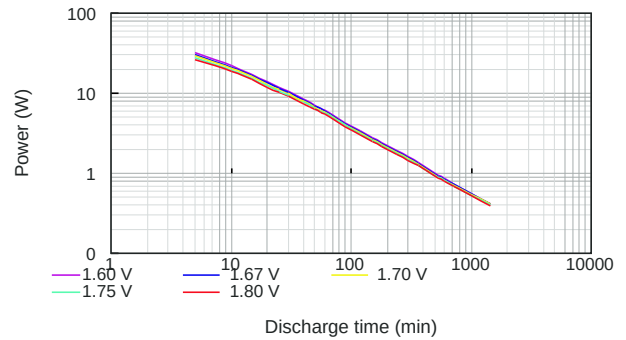


Capacity vs. temperature

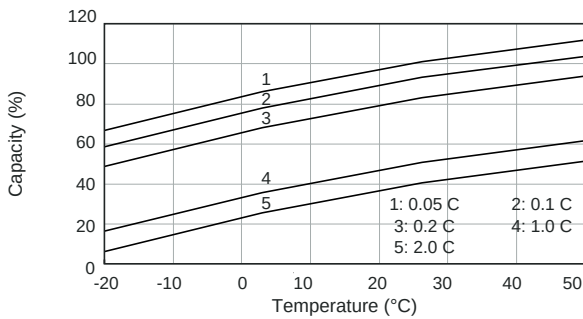


Charge voltage vs. temperature

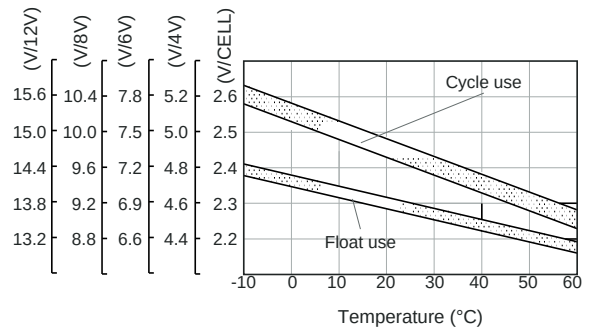


Self-discharge

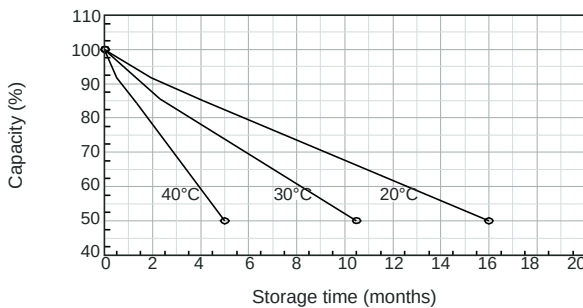


Standby service life

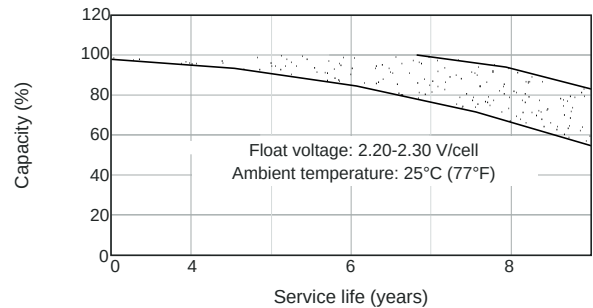

Float life vs. temperature

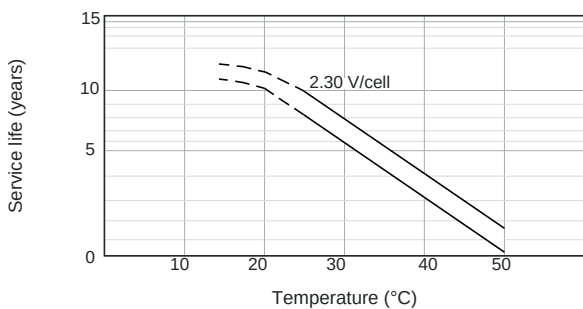

Cycle life vs. depth of discharge

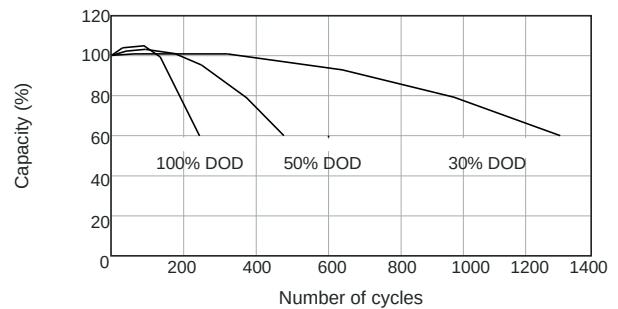

Typical characteristic curves. Model-specific ratings are given on pages 1 and 3. Design life is not a warranty.