YELLOW TP80

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	8
Nominal voltage	409.6 V
Capacity	50 Ah
Nominal energy	20.48 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	358.4 - 441.6 V
Charge current	10 - 25 A
Charge voltage	435.2 - 441.6 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	480 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

8 x LIBVISMOD50
1 x LIBVISRAC50Ah2000
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	15	30	45	60
Power, kW	91	80	40	27	20

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TP100

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	10
Nominal voltage	512 V
Capacity	50 Ah
Nominal energy	25.6 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	448 - 552 V
Charge current	10 - 25 A
Charge voltage	544 - 552 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	550 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

10 x LIBVISMOD50
1 x LIBVISRAC50Ah2000
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	15	30	45	60
Power, kW	114	100	51	34	26

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TP120

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	12
Nominal voltage	614.4 V
Capacity	50 Ah
Nominal energy	30.72 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	537.6 - 662.4 V
Charge current	10 - 25 A
Charge voltage	652.8 - 662.4 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	620 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

12 x LIBVISMOD50
1 x LIBVISRAC50Ah2000
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	15	30	45	60
Power, kW	137	120	61	41	31

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TP160

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	8
Nominal voltage	409.6 V
Capacity	100 Ah
Nominal energy	40.96 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	358.4 - 441.6 V
Charge current	20 - 50 A
Charge voltage	435.2 - 441.6 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	760 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

8 x LIBVISMOD100
1 x LIBVISRAC100Ah2000
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	15	30	45	60
Power, kW	200	160	81	54	41

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TP200

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	10
Nominal voltage	512 V
Capacity	100 Ah
Nominal energy	51.2 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	448 - 552 V
Charge current	20 - 50 A
Charge voltage	544 - 552 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	900 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

10 x LIBVISMOD100
1 x LIBVISRAC100Ah2000
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	15	30	45	60
Power, kW	250	200	101	68	51

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TP240

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TP
Series modules	12
Nominal voltage	614.4 V
Capacity	100 Ah
Nominal energy	61.44 kWh
Datasheet enclosure, W × H × D	600 × 2300 × 1000 mm
Voltage range	537.6 - 662.4 V
Charge current	20 - 50 A
Charge voltage	652.8 - 662.4 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	1040 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

12 x LIBVISMOD100
1 x LIBVISRAC100Ah2300
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	10	13	15	30	45	60
Power, kW	324	300	240	121	81	61

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPH160

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPH
Series modules	8
Nominal voltage	409.6 V
Capacity	50 Ah
Nominal energy	20.48 kWh
Datasheet enclosure, W × H × D	600 × 1500 × 1000 mm
Voltage range	358.4 - 441.6 V
Charge current	10 - 25 A
Charge voltage	435.2 - 441.6 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	520 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

8 x LIBVISMOD50-H
1 x LIBVISRAC50Ah2000-H
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	5	6	7	15
Power, kW	168	168	144	73

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS. Current datasheet dimensions differ from the 2024 BOM enclosure.

YELLOW TPH200

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPH
Series modules	10
Nominal voltage	512 V
Capacity	50 Ah
Nominal energy	25.6 kWh
Datasheet enclosure, W × H × D	600 × 1500 × 1000 mm
Voltage range	448 - 552 V
Charge current	10 - 25 A
Charge voltage	544 - 552 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	600 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

10 x LIBVISMOD50-H
1 x LIBVISRAC50Ah2000-H
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	5	6	7	15
Power, kW	210	210	180	92

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS. Current datasheet dimensions differ from the 2024 BOM enclosure.

YELLOW TPH240

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPH
Series modules	12
Nominal voltage	614.4 V
Capacity	50 Ah
Nominal energy	30.72 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	537.6 - 662.4 V
Charge current	10 - 25 A
Charge voltage	652.8 - 662.4 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	680 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

12 x LIBVISMOD50-H
1 x LIBVISRAC50Ah2000-H
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	5	6	7	15
Power, kW	252	252	216	110

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPH280

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPH
Series modules	14
Nominal voltage	716.8 V
Capacity	50 Ah
Nominal energy	35.84 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	627.2 - 772.8 V
Charge current	10 - 25 A
Charge voltage	761.6 - 772.8 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	760 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	630 A

Single cabinet bill of materials

14 x LIBVISMOD50-H
1 x LIBVISRAC50Ah2000-H
1 x LIBVISBMSIEC630
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	5	6	7	15
Power, kW	294	294	252	128

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPL40A

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	8
Nominal voltage	409.6 V
Capacity	100 Ah
Nominal energy	40.96 kWh
Datasheet enclosure, W × H × D	600 × 1500 × 1000 mm
Voltage range	358.4 - 441.6 V
Charge current	20 - 50 A
Charge voltage	435.2 - 441.6 V
Approximate weight	496 kg
BMS current in BOM	125 A

Single cabinet bill of materials

8 x LIBVISMOD100-L
1 x LIBVISRAC100Ah2000-L
1 x LIBVISBMSIEC125
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	180	240
Power, kW	38	25	19	12	9

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS. Current datasheet dimensions differ from the 2024 BOM enclosure.

YELLOW TPL50A

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	10
Nominal voltage	512 V
Capacity	100 Ah
Nominal energy	51.2 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	448 - 552 V
Charge current	20 - 50 A
Charge voltage	544 - 552 V
Approximate weight	585 kg
BMS current in BOM	125 A

Single cabinet bill of materials

10 x LIBVISMOD100-L
1 x LIBVISRAC100Ah2000-L
1 x LIBVISBMSIEC125
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	240
Power, kW	48	32	24	12

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPL60A

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	12
Nominal voltage	614.4 V
Capacity	100 Ah
Nominal energy	61.44 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	537.6 - 662.4 V
Charge current	20 - 50 A
Charge voltage	652.8 - 662.4 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	700 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	125 A

Single cabinet bill of materials

12 x LIBVISMOD100-L
1 x LIBVISRAC100Ah2000-L
1 x LIBVISBMSIEC125
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	180	240
Power, kW	58	38	29	19	14.5

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS. Verify the BMS voltage range: 600 VDC in the BOM versus 614.4 V nominal battery.

YELLOW TPL80

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	8
Nominal voltage	409.6 V
Capacity	200 Ah
Nominal energy	81.92 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	358.4 - 441.6 V
Charge current	40 - 100 A
Charge voltage	435.2 - 441.6 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	840 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

8 x LIBVISMOD200-L
1 x LIBVISRAC200Ah2000-L
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	180	240
Power, kW	76.8	51.2	39.2	26	19.6

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPL100

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	10
Nominal voltage	512 V
Capacity	200 Ah
Nominal energy	102.4 kWh
Datasheet enclosure, W × H × D	600 × 2000 × 1000 mm
Voltage range	448 - 552 V
Charge current	40 - 100 A
Charge voltage	544 - 552 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	1000 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

10 x LIBVISMOD200-L
1 x LIBVISRAC200Ah2000-L
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	180	240
Power, kW	96	64	49	32.5	24.5

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW TPL120

Lithium UPS battery system. Nominal data and verified version parameters.



Family illustration; the specified enclosure version may differ.

Series	TPL
Series modules	12
Nominal voltage	614.4 V
Capacity	200 Ah
Nominal energy	122.88 kWh
Datasheet enclosure, W × H × D	600 × 2300 × 1000 mm
Voltage range	537.6 - 662.4 V
Charge current	40 - 100 A
Charge voltage	652.8 - 662.4 V
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Approximate weight	1300 kg
System interfaces	CAN / RS485 / TCP
BMS current in BOM	250 A

Single cabinet bill of materials

12 x LIBVISMOD200-L
1 x LIBVISRAC200Ah2300-L
1 x LIBVISBMSIEC250
1 x LIBVISGBMS

Constant-power discharge, one cabinet, DC

Time, min	60	90	120	180	240
Power, kW	115.2	76.8	58.8	39	29.4

DC power is not AC load power. Confirm voltage range, current, charging, communications and permitted parallel cabinets for the selected UPS.

YELLOW LIBVISMOD100

Battery module. Component of YELLOW battery solutions.



Photograph of the corresponding module family.

Part number	LIBVISMOD100
Purpose	Battery module
Chemistry	LiFePO□ / LFP
Nominal voltage	51.2 V
Capacity	100 Ah
Nominal energy	5.12 kWh
C-rate in BOM	6C
Family designation	TP20
Family cell topology	2P16S
Family dimensions as documented, mm	442 × 800 × 150
Reference-version weight	70 kg

Application

YELLOW TP160, YELLOW TP200, YELLOW TP240

Dimensions and topology describe the stated family. Confirm the exact 2024 BOM part version when specifying the order. Weight refers to the 2022 technical version.

Confirm for the order: Confirm the exact-part photo and datasheet, weight, full discharge table and operating limits.

YELLOW LIBVISMOD100-L

Battery module. Component of YELLOW battery solutions.



Photograph of the corresponding module family.

Part number	LIBVISMOD100-L
Purpose	Battery module
Chemistry	LiFePO□ / LFP
Nominal voltage	51.2 V
Capacity	100 Ah
Nominal energy	5.12 kWh
C-rate in BOM	1C
Family designation	TPL5
Family cell topology	1P16S
Family dimensions as documented, mm	442 × 690 × 108

Application


YELLOW TPL40A, YELLOW TPL50A, YELLOW TPL60A

Dimensions and topology describe the stated family. Confirm the exact 2024 BOM part version when specifying the order.

Confirm for the order: Confirm the exact-part photo and datasheet, weight, full discharge table and operating limits.

YELLOW LIBVISMOD200-L

Battery module. Component of YELLOW battery solutions.

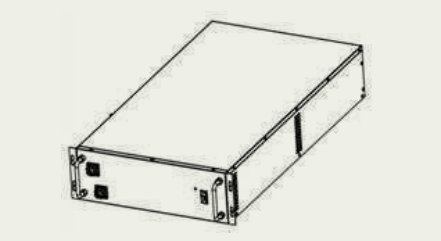

Drawing of the corresponding module family.

Part number	LIBVISMOD200-L
Purpose	Battery module
Chemistry	LiFePO□ / LFP
Nominal voltage	51.2 V
Capacity	200 Ah
Nominal energy	10.24 kWh
C-rate in BOM	1C
Family designation	TPL10
Family cell topology	2P16S
Family dimensions as documented, mm	442 × 800 × 149

Application

YELLOW TPL80, YELLOW TPL100, YELLOW TPL120

Dimensions and topology describe the stated family. Confirm the exact 2024 BOM part version when specifying the order.

Confirm for the order: Confirm the exact-part photo and datasheet, weight, full discharge table and operating limits.

YELLOW LIBVISMOD50

Battery module. Component of YELLOW battery solutions.



Photograph of the corresponding module family.

Part number	LIBVISMOD50
Purpose	Battery module
Chemistry	LiFePO□ / LFP
Nominal voltage	51.2 V
Capacity	50 Ah
Nominal energy	2.56 kWh
C-rate in BOM	6C
Family designation	TP10
Family cell topology	1P16S
Family dimensions as documented, mm	442 × 690 × 106
Reference-version weight	36 kg

Application


YELLOW TP80, YELLOW TP100, YELLOW TP120

Dimensions and topology describe the stated family. Confirm the exact 2024 BOM part version when specifying the order. Weight refers to the 2022 technical version.

Confirm for the order: Confirm the exact-part photo and datasheet, weight, full discharge table and operating limits.

YELLOW LIBVISMOD50-H

Battery module. Component of YELLOW battery solutions.

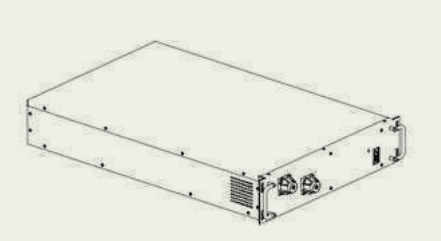

Drawing of the corresponding module family.

Part number	LIBVISMOD50-H
Purpose	Battery module
Chemistry	LiFePO□ / LFP
Nominal voltage	51.2 V
Capacity	50 Ah
Nominal energy	2.56 kWh
C-rate in BOM	10C
Family designation	TPH20
Family cell topology	1P16S
Family dimensions as documented, mm	442 × 600 × 127

Application

YELLOW TPH160, YELLOW TPH200, YELLOW TPH240, YELLOW TPH280

Dimensions and topology describe the stated family. Confirm the exact 2024 BOM part version when specifying the order.

Confirm for the order: Confirm the exact-part photo and datasheet, weight, full discharge table and operating limits.

YELLOW LIBVISRAC100Ah2000

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC100Ah2000
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2000 × 1000 mm
Modules in BOMs	8 / 10

Application

YELLOW TP160, YELLOW TP200

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC100Ah2000-L

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC100Ah2000-L
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2000 × 1000 mm
Modules in BOMs	8 / 10 / 12

Application

YELLOW TPL40A, YELLOW TPL50A, YELLOW TPL60A

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC100Ah2300

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC100Ah2300
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2300 × 1000 mm
Modules in BOMs	12

Application

YELLOW TP240

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC200Ah2000-L

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC200Ah2000-L
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2000 × 1000 mm
Modules in BOMs	8 / 10

Application

YELLOW TPL80, YELLOW TPL100

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC200Ah2300-L

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC200Ah2300-L
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2300 × 1000 mm
Modules in BOMs	12

Application

YELLOW TPL120

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC50Ah2000

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC50Ah2000
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2000 × 1000 mm
Modules in BOMs	8 / 10 / 12

Application

YELLOW TP80, YELLOW TP100, YELLOW TP120

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISRAC50Ah2000-H

Cabinet enclosure. Component of YELLOW battery solutions.



Assembled cabinet family example, not an exact photograph of this empty enclosure.

Part number	LIBVISRAC50Ah2000-H
Purpose	Cabinet enclosure
2024 enclosure, W × H × D	600 × 2000 × 1000 mm
Modules in BOMs	8 / 10 / 12 / 14

Application


YELLOW TPH160, YELLOW TPH200, YELLOW TPH240, YELLOW TPH280

Dimensions refer to the 2024 BOM. Current enclosure height and layout may differ.

Confirm for the order: Confirm the exact empty-enclosure photo, weight, IP rating, floor loading and mounting drawings.

YELLOW LIBVISBMSIEC125

Cabinet BMS controller. Component of YELLOW battery solutions.

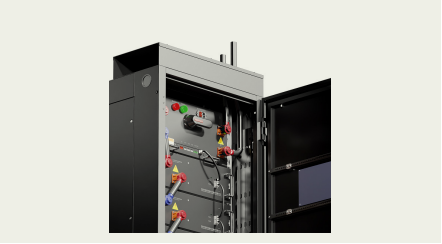

Family switching unit; the exact part number in the photo is unverified.

Part number	LIBVISBMSIEC125
Purpose	Cabinet BMS controller
BOM current	125 A

Application


YELLOW TPL40A, YELLOW TPL50A, YELLOW TPL60A

The BOM current does not establish the full voltage range or protection settings. For TPL60A, verify the 600 VDC BMS listing against the 614.4 V nominal battery.

Confirm for the order: The IEC part requires an exact photo, datasheet, DC range, protection settings, dimensions and weight.

YELLOW LIBVISBMSIEC250

Cabinet BMS controller. Component of YELLOW battery solutions.

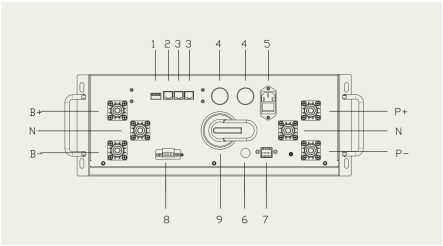

Panel drawing of a related switching unit. The exact IEC version is unverified.

Part number	LIBVISBMSIEC250
Purpose	Cabinet BMS controller
BOM current	250 A

Application


YELLOW TP80, YELLOW TP100, YELLOW TP120, YELLOW TPL80, YELLOW TPL100, YELLOW TPL120

The BOM current does not establish the full voltage range or protection settings.

Confirm for the order: The IEC part requires an exact photo, datasheet, DC range, protection settings, dimensions and weight.

YELLOW LIBVISBMSIEC630

Cabinet BMS controller. Component of YELLOW battery solutions.

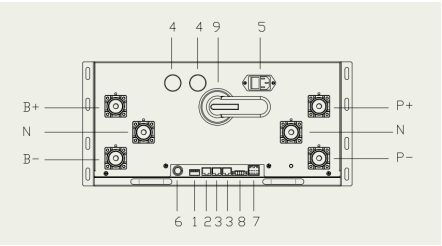

Panel drawing of a related switching unit. The exact IEC version is unverified.

Part number	LIBVISBMSIEC630
Purpose	Cabinet BMS controller
BOM current	630 A

Application


YELLOW TP160, YELLOW TP200, YELLOW TP240, YELLOW TPH160, YELLOW TPH200, YELLOW TPH240, YELLOW TPH280

The BOM current does not establish the full voltage range or protection settings.

Confirm for the order: The IEC part requires an exact photo, datasheet, DC range, protection settings, dimensions and weight.

YELLOW LIBVISGBMS

Group GBMS controller. Component of YELLOW battery solutions.

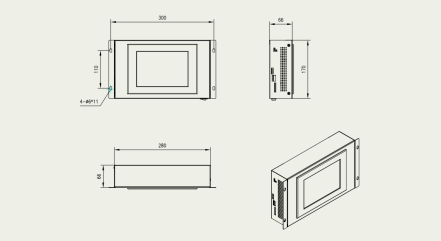

LIBVISGBMS dimensional drawing: 300 × 170 × 66 mm version.

Part number	LIBVISGBMS
Purpose	Group GBMS controller
Management level	Cabinet group
Dry contacts	3 outputs / 1 input
Dimensions, W × H × D	300 × 170 × 66 mm
Weight	2.2 kg
Recommended temperature	15 - 35 °C
Operating temperature	0 - 40 °C
Humidity	0 - 95%, non-condensing

Application

YELLOW TP80, YELLOW TP100, YELLOW TP120, YELLOW TP160, YELLOW TP200, YELLOW TP240, YELLOW TPH160, YELLOW TPH200, YELLOW TPH240, YELLOW TPH280, YELLOW TPL40A, YELLOW TPL50A, YELLOW TPL60A, YELLOW TPL80, YELLOW TPL100, YELLOW TPL120

Reference version from the 2022 technical edition. Geometry is documented for this part number; confirm the current revision and UPS protocol.

Confirm for the order: Confirm a separate photograph, current revision, power supply and port pinout.

YELLOW TPL5A

Reference module version, technical edition V2.5-01. Does not substitute for the 2024 BOM part number.



Photograph of the corresponding module family.

Voltage range	44.8 - 55.2 V
Cell	3.2 V / 100 Ah
Topology	16S1P
Nominal voltage	51.2 V
Capacity	100 Ah
Nominal energy	5.12 kWh
Recommended charge current	20 - 50 A
Discharge cutoff	44.8 V
Charge voltage	54.4 - 55.2 V
Cycles	>3500 @ 25°C; 0.5C/0.5C; 100% DOD
Dimensions, W × D × H	442 × 700 × 106 mm
Approximate weight	45 kg
Cooling	Air
Charge temperature	0 - 50 °C
Discharge temperature	-20 - 65 °C
Interfaces	CAN / RS485 / TCP
Design life	15 years