
SOLUTION / LARGE DATA CENTRES

YELLOW PBMS9000

19″ / 1U controller with ring communication and dual power inputs.

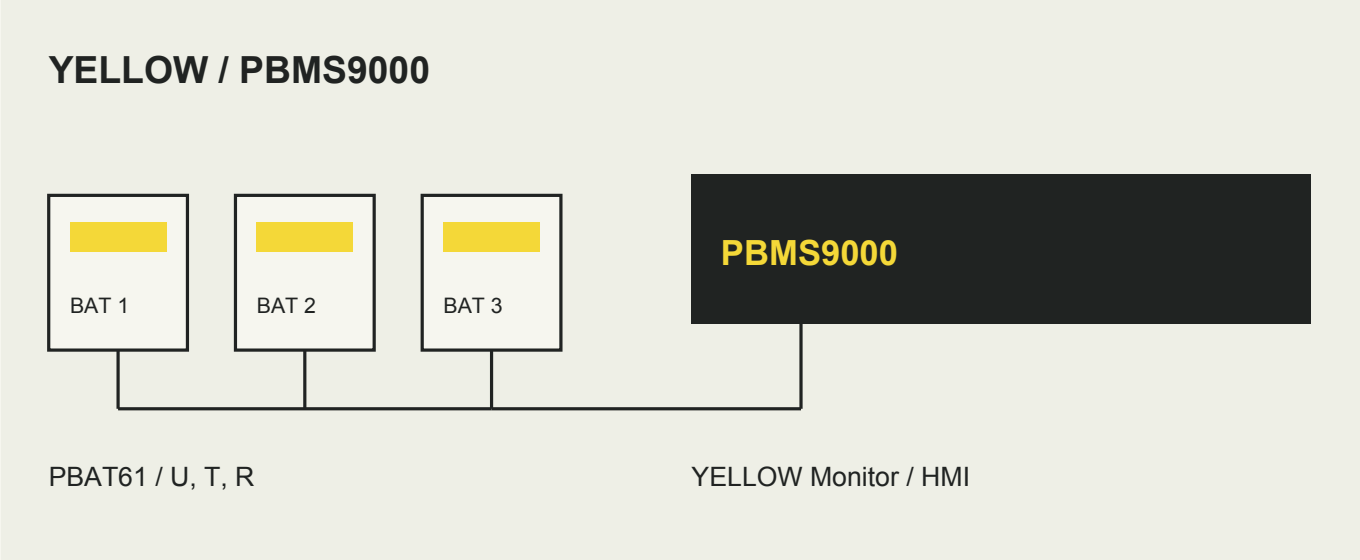

Functional data flow; not an installation drawing.

Batteries	Lead-acid, including multi-pole batteries
Capacity	Up to 640 batteries · 8C version
Strings	Up to 8 strings of 80 batteries
Integration	Modbus RTU / TCP, SNMP, MQTT, IEC 61850

Maximum battery counts apply to the specified version. Sensors, power supplies and interfaces are selected for the project.

COMPONENTS AND SPECIFICATIONS

YELLOW PBMS9000

Battery sensors	YELLOW PBAT61
String measurement	PBMS-CM2 and Hall sensor per battery string
Display	HMI / YELLOW Monitor

Technical parameters

Mounting	19 inch / 1U
Dimensions W x D x H	483 x 206 x 44.5 mm
Controller consumption	< 15 W
Digital channels	6 DI / 6 DO

Configuration requirements

Confirm battery type and voltage, batteries per string, parallel string count, power supply, equipment layout and supervisory protocols.

Voltage, current and environmental sensors, cables, HMI and alert channels are specified separately. SOC/SOH estimates do not replace capacity testing.