
SOLUTION / SUBSTATIONS AND INDUSTRY

YELLOW PBMS9000Pro

Bus-powered sensors. Leakage and electrolyte level monitoring are optional.

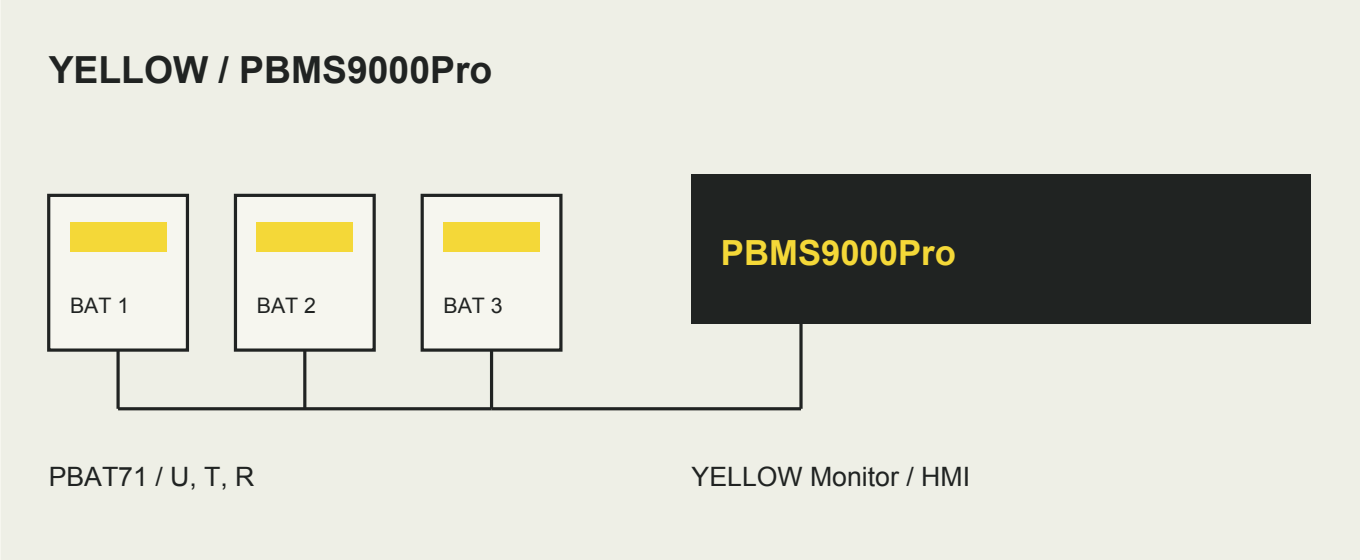

Functional data flow; not an installation drawing.

Batteries	VRLA / Ni-Cd, including multi-pole batteries
Capacity	Up to 420 batteries
Strings	Up to 6 strings of 70 batteries
Integration	Modbus RTU / TCP, SNMP, MQTT, IEC 61850

Maximum battery counts apply to the specified version. Sensors, power supplies and interfaces are selected for the project.

COMPONENTS AND SPECIFICATIONS

YELLOW PBMS9000Pro

Battery sensors	YELLOW PBAT71
String measurement	String current module and Hall sensor as specified
Display	HMI / YELLOW Monitor

Technical parameters

Mounting	19 inch / 1U
Dimensions W x D x H	483 x 206 x 44.5 mm
Power variants	V1: 48 V DC / V2: 220 V AC / V3: 110 V DC
Controller consumption	< 15 W

Configuration requirements

Confirm battery type and voltage, batteries per string, parallel string count, power supply, equipment layout and supervisory protocols.

Voltage, current and environmental sensors, cables, HMI and alert channels are specified separately. SOC/SOH estimates do not replace capacity testing.