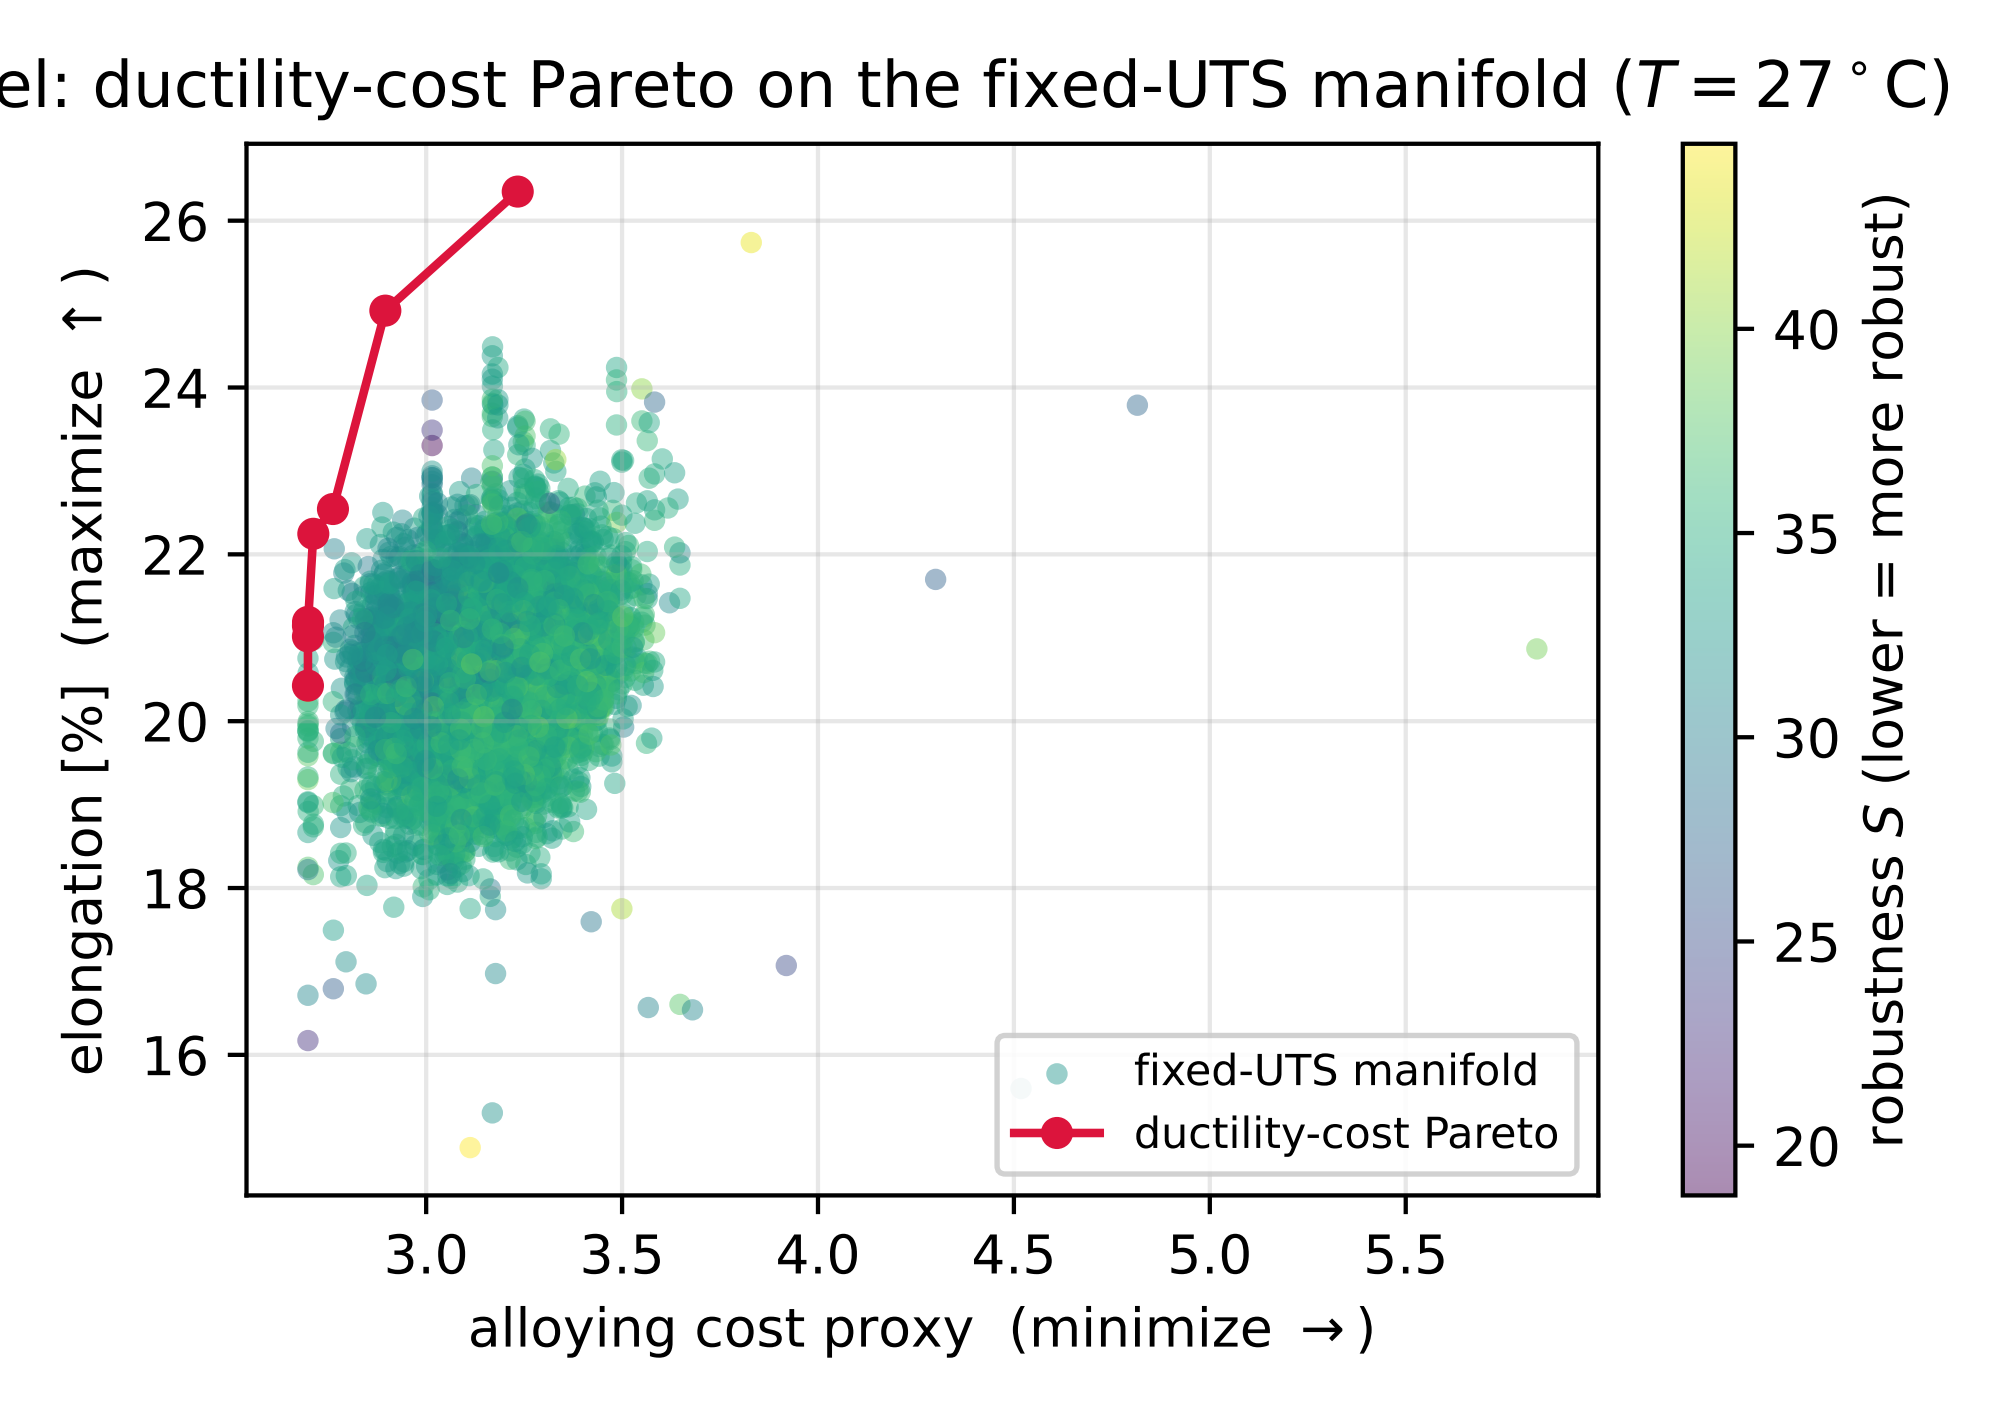

el: ductility-cost Pareto on the fixed-UTS manifold ($T = 27\,^\circ$C)
elongation [%] (maximize ↑)
26
24
22
20
18
16
3.0
3.5
4.0
4.5
5.0
5.5
alloying cost proxy (minimize →)
fixed-UTS manifold
ductility-cost Pareto
robustness S (lower = more robust)
40
35
30
25
20