


Conector de esquina

ARECE2

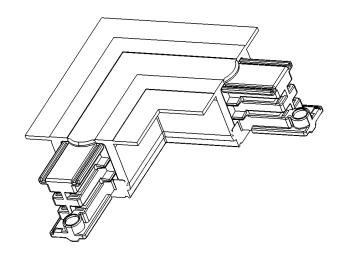

Material PC + cobre + acero

Peso 0.125 Kg

Voltaje 120-230V~

Potencia Max 1920W

Corriente Max 16A

Agregue "N" al final del Color

código

Agregue "B" al final del

código

Medidas

Ejemplo: ARECE2B



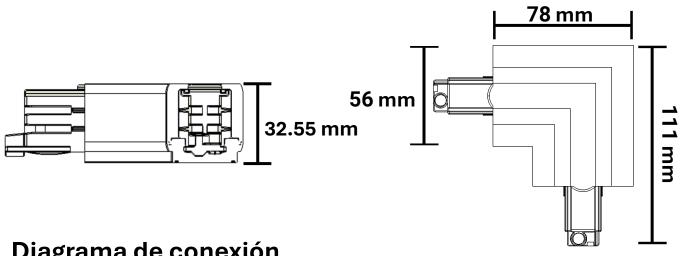


Diagrama de conexión

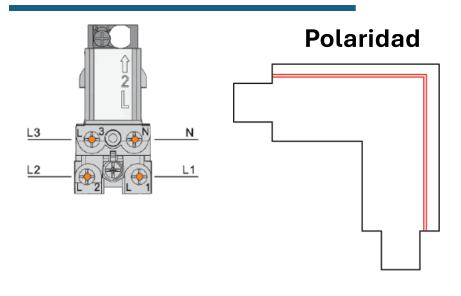



3-phase, 3-circuit 230/4 Supply	100V AC, Track	16A, 3x3.7 I
Max 16A	L2	
	L1	_ \
3-	L3	
N D	N	Γ ,
L1+L2+L3: I = max 16A		- -

3-phase, 3-phase	230	/400V A Trac ÷		16A, 11.1 I
Max 16A		L2	Г	
		L1	\top	$\overline{}$
		L3		_
Ν .		N		
N-conductor = max16	SA.		Ŧ	