



```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection: (default port)
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address.....: FE80::2D0:58FF:FE25:C253
  IPv6 Address....: ::
  IPv4 Address..... 10.0.0.5
  Subnet Mask..... 255.0.0.0
  Default Gateway....::::
                                 0.0.0.0
Bluetooth Connection:
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address....:::
  IPv6 Address....: ::
  IPv4 Address..... 0.0.0.0
  Subnet Mask..... 0.0.0.0
  Default Gateway....:::
                                 0.0.0.0
C:\>ping 10.0.0.9
Pinging 10.0.0.9 with 32 bytes of data:
Reply from 10.0.0.9: bytes=32 time=1ms TTL=128
Reply from 10.0.0.9: bytes=32 time<1ms TTL=128
Reply from 10.0.0.9: bytes=32 time<1ms TTL=128
Reply from 10.0.0.9: bytes=32 time<1ms TTL=128
Ping statistics for 10.0.0.9:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
   Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

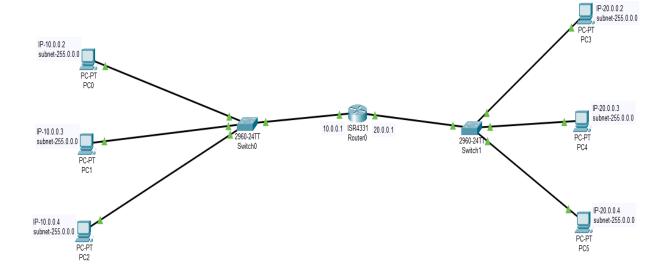

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection: (default port)
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address.....: FE80::2E0:F7FF:FE3A:1E10
  IPv6 Address....:::
  IPv4 Address..... 10.0.0.3
  Subnet Mask..... 255.0.0.0
  Default Gateway....::
                                 10.0.0.1
Bluetooth Connection:
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address....::
  IPv6 Address....::::
  IPv4 Address..... 0.0.0.0
  Subnet Mask..... 0.0.0.0
  Default Gateway....::::
                                 0.0.0.0
C:\>ping 20.0.0.3
Pinging 20.0.0.3 with 32 bytes of data:
Request timed out.
Reply from 20.0.0.3: bytes=32 time<1ms TTL=127
Reply from 20.0.0.3: bytes=32 time<1ms TTL=127
Reply from 20.0.0.3: bytes=32 time<lms TTL=127
Ping statistics for 20.0.0.3:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss), Approximate round trip times in milli-seconds:
   Minimum = Oms, Maximum = Oms, Average = Oms
```

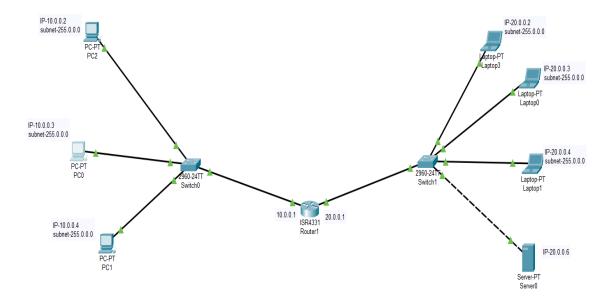

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection: (default port)
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address.....: FE80::230:F2FF:FE51:75E3
  IPv6 Address....: ::
  IPv4 Address..... 10.0.0.3
  Subnet Mask..... 255.0.0.0
  Default Gateway....:::
                                   10.0.0.1
Bluetooth Connection:
  Connection-specific DNS Suffix..:
  Link-local IPv6 Address....:::
  IPv6 Address....:::
  IPv4 Address..... 0.0.0.0
  Subnet Mask..... 0.0.0.0
  Default Gateway....::::
                                   0.0.0.0
C:\>ping 20.0.0.3
Pinging 20.0.0.3 with 32 bytes of data:
Reply from 20.0.0.3: bytes=32 time<lms TTL=127 Reply from 20.0.0.3: bytes=32 time<lms TTL=127
Reply from 20.0.0.3: bytes=32 time<1ms TTL=127
Reply from 20.0.0.3: bytes=32 time<1ms TTL=127
Ping statistics for 20.0.0.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds:
   Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

