

Faculty of Computing



[CCN]

Lab No 10 Tasks


NAME: SITARA REHMAN

SAP ID:66454

Task 1:

Perform all the tasks in the manual and take screenshot. (10 marks)

Task 2:

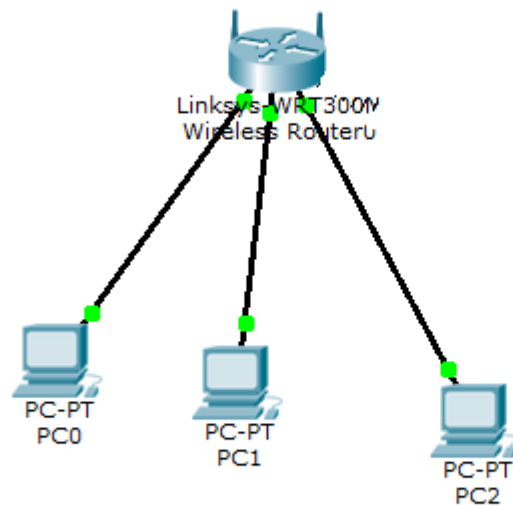

Solution


```
Router>enable
Router#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp pool MY_NETWORK
Router(dhcp-config)#network 192.168.1.0
% Incomplete command.
Router(dhcp-config)#default-router 192.168.1.1
Router(dhcp-config)#dns-server 8.8.8.8
Router(dhcp-config)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

```

%SYS-5-CONFIG_I: Configured from console by console

Router#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp pool MY_NETWORK
Router(dhcp-config)#network 192.168.1.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.1.1
Router(dhcp-config)#dns-server 8.8.8.8
Router(dhcp-config)#exit
Router(config)#

```

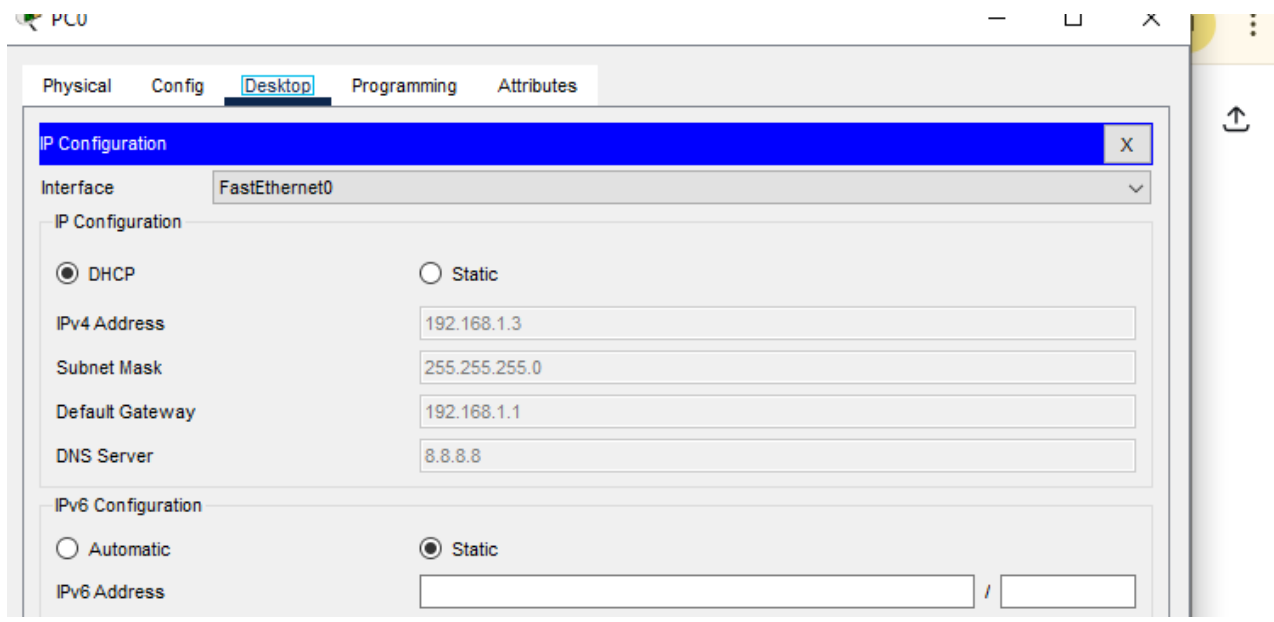

Pc0

```

ping statistics for 192.168.10.12.
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ipconfig /release

IP Address. . . . .: 0.0.0.0
Subnet Mask. . . . .: 0.0.0.0
Default Gateway. . . . .: 0.0.0.0
DNS Server. . . . .: 0.0.0.0


C:\>ipconfig /renew

IP Address. . . . .: 192.168.1.3
Subnet Mask. . . . .: 255.255.255.0
Default Gateway. . . . .: 192.168.1.1
DNS Server. . . . .: 8.8.8.8


C:\>

```


Pc1

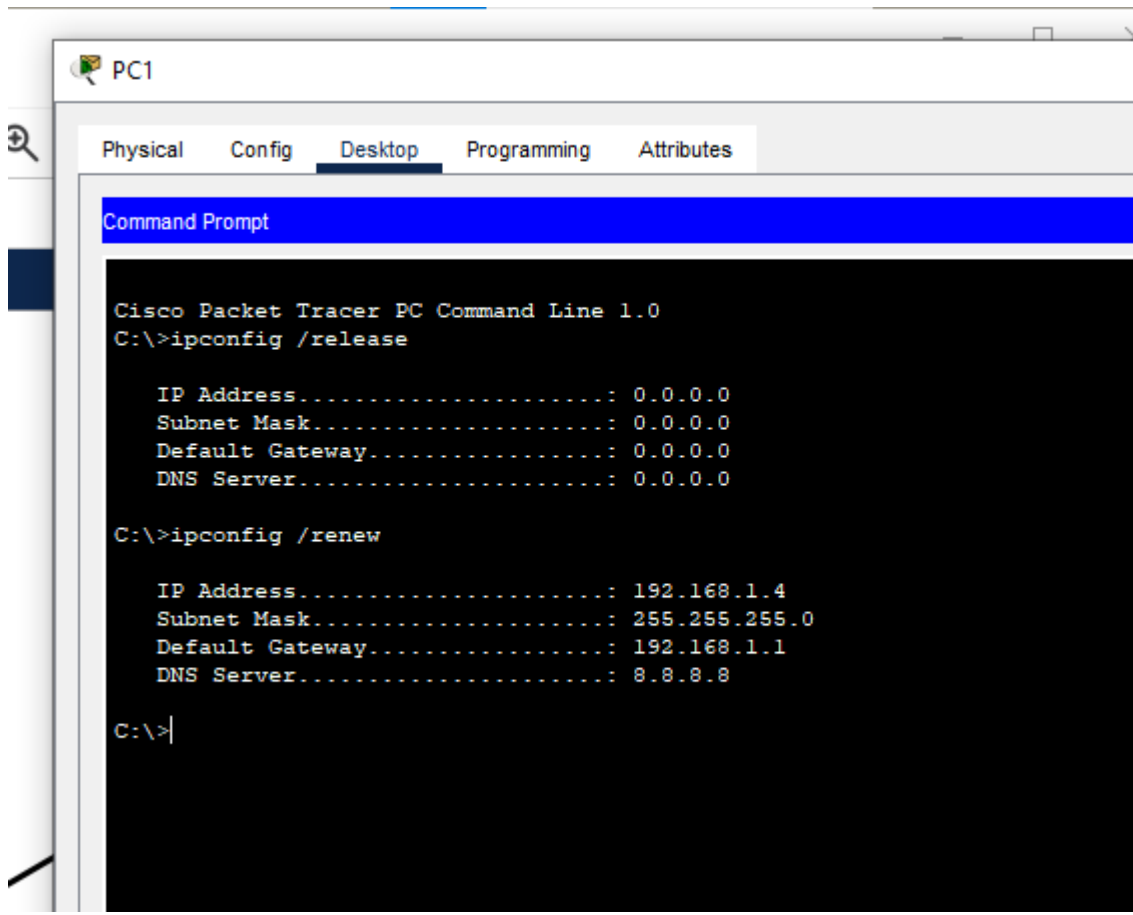

Pc2

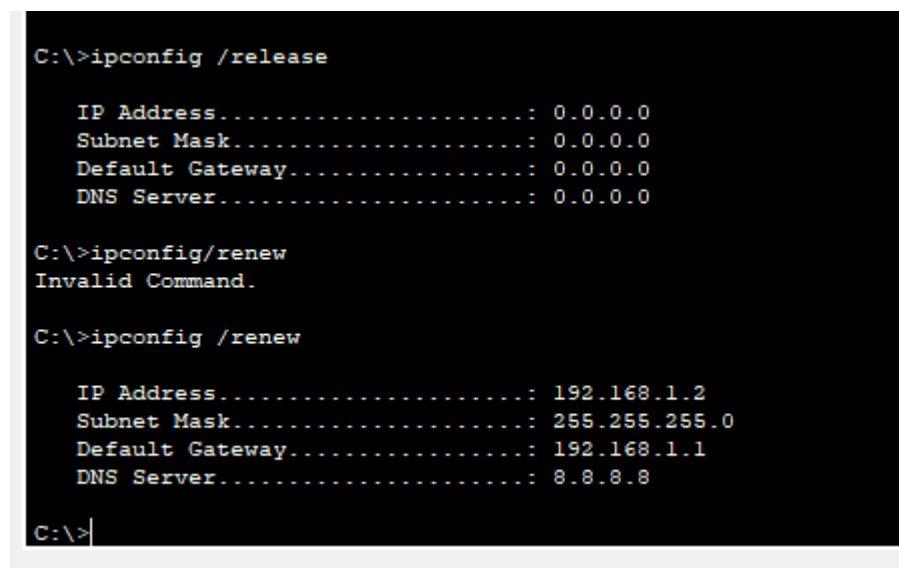

Create the above topology. (10 marks)

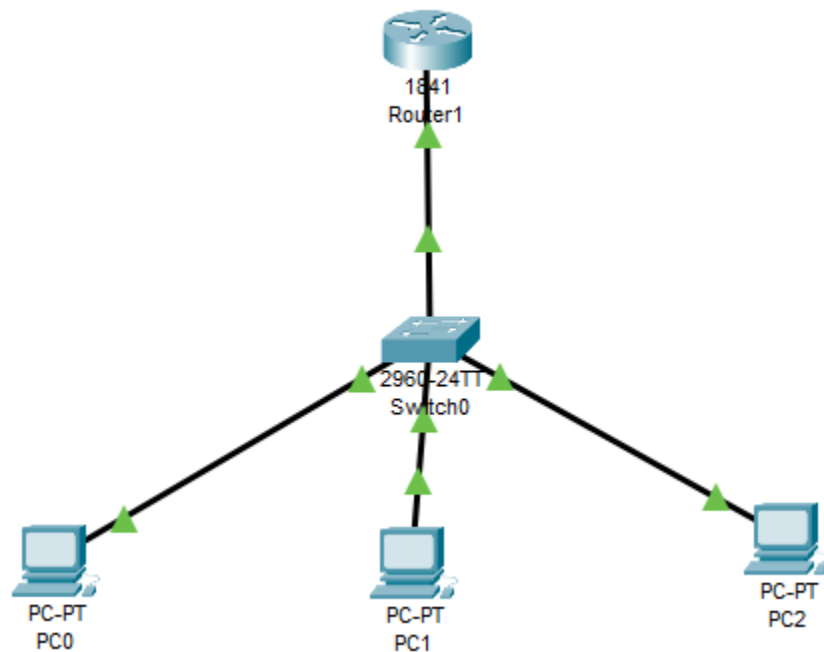

ROUTER

```
IOS Command Line Interface
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastethernet0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#^
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
write memory
Building configuration...
[OK]
Router#write memory
Building configuration...
[OK]
Router#
```

SWITCH

dialog

ith CH

55.0

d stat

stEthe

e

CH

IOS Command Line Interface

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fasterethernet0/1
^
% Invalid input detected at '^' marker.


Switch(config)#interface fastethernet0/1
Switch(config-if)#no shutdown
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
write memory
Building configuration...
[OK]
Switch#

Switch con0 is now available


Copy

Past

PC0

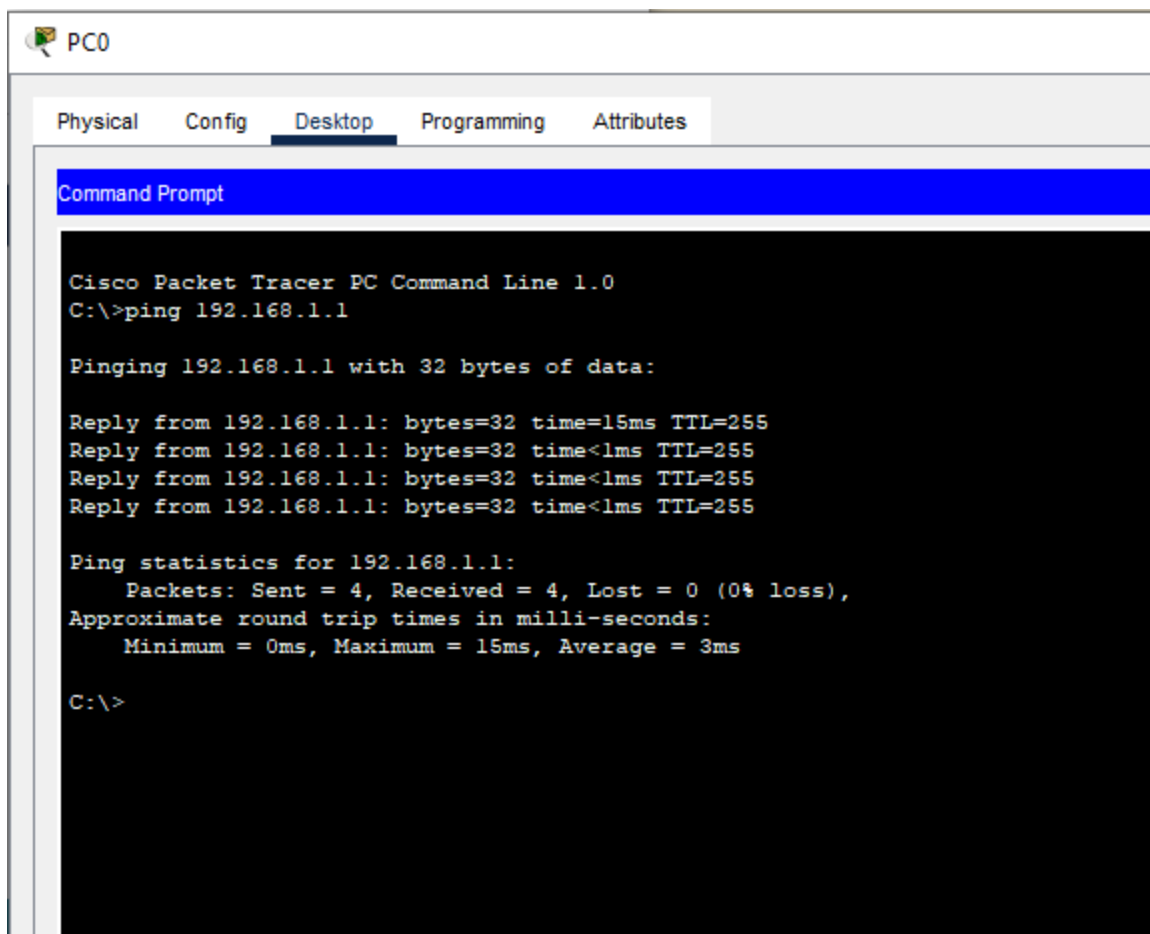

PC1

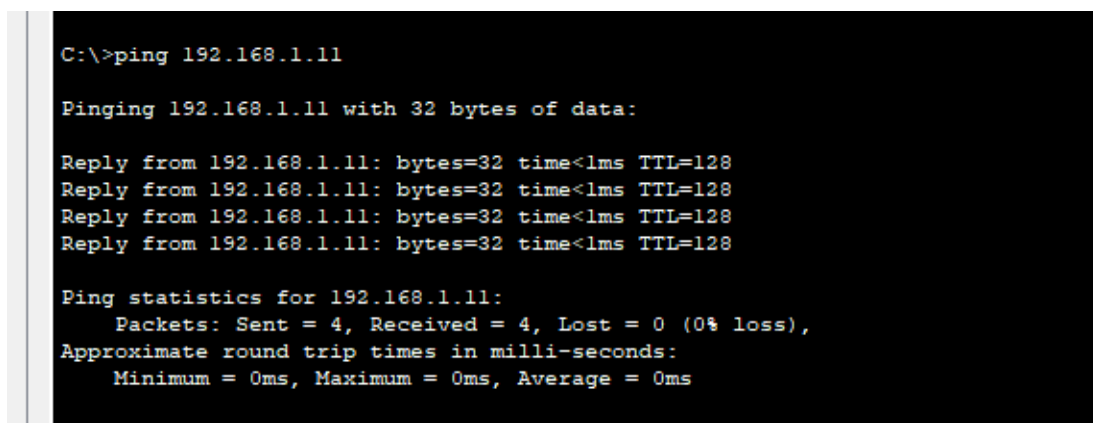

Pc2

