


Faculty of Computing




[CCN]

Lab No 14 Tasks

Task: Create the topology below using default routing. Take screenshot of each step and show the successful ping of the packets from one pc to another pc.

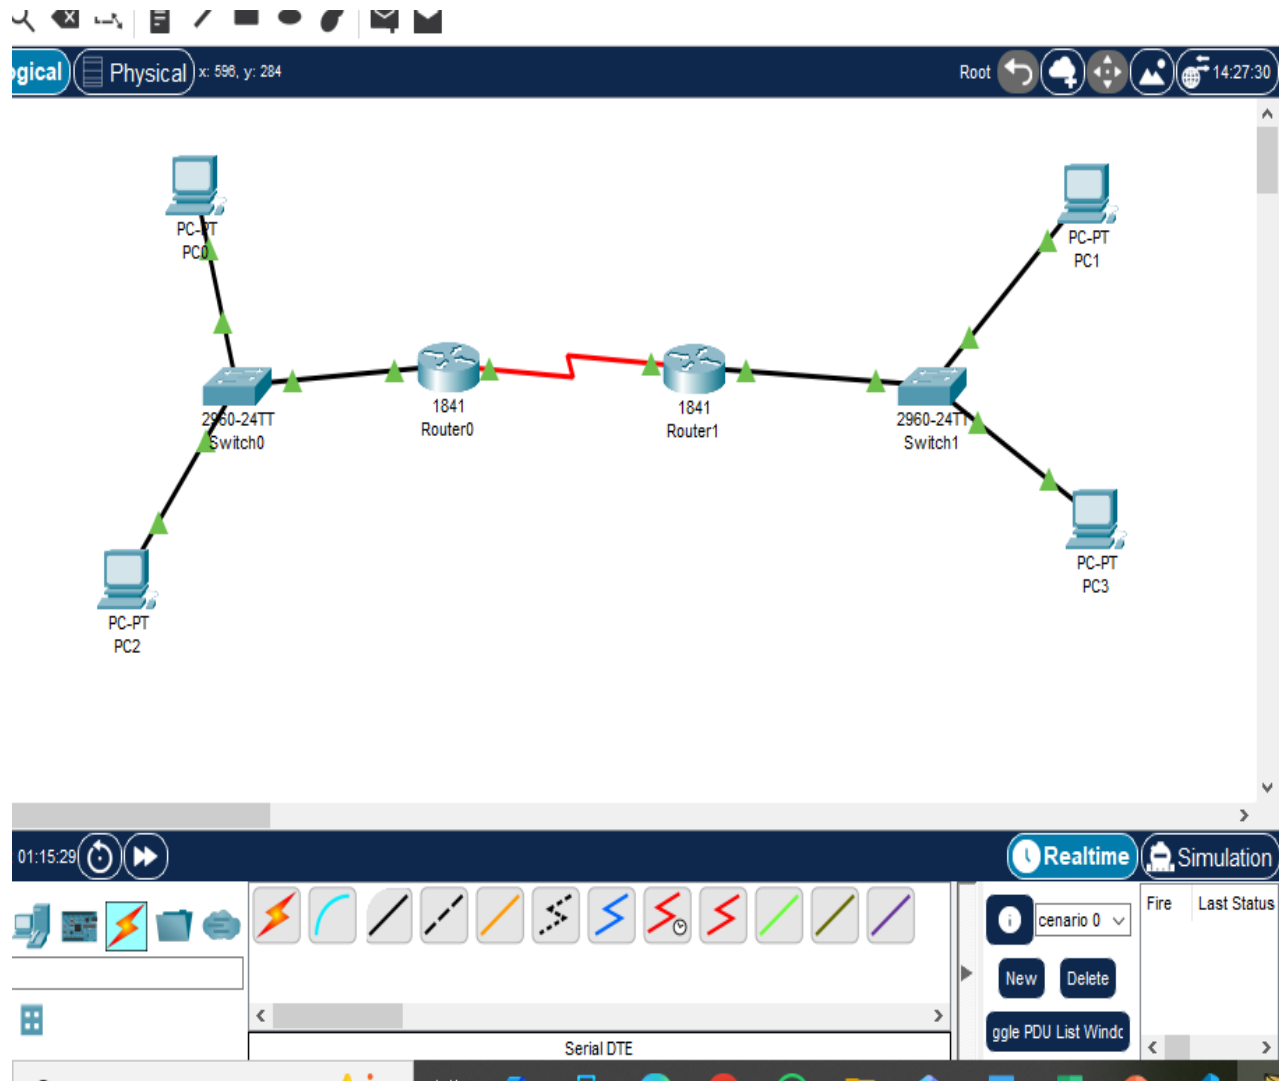

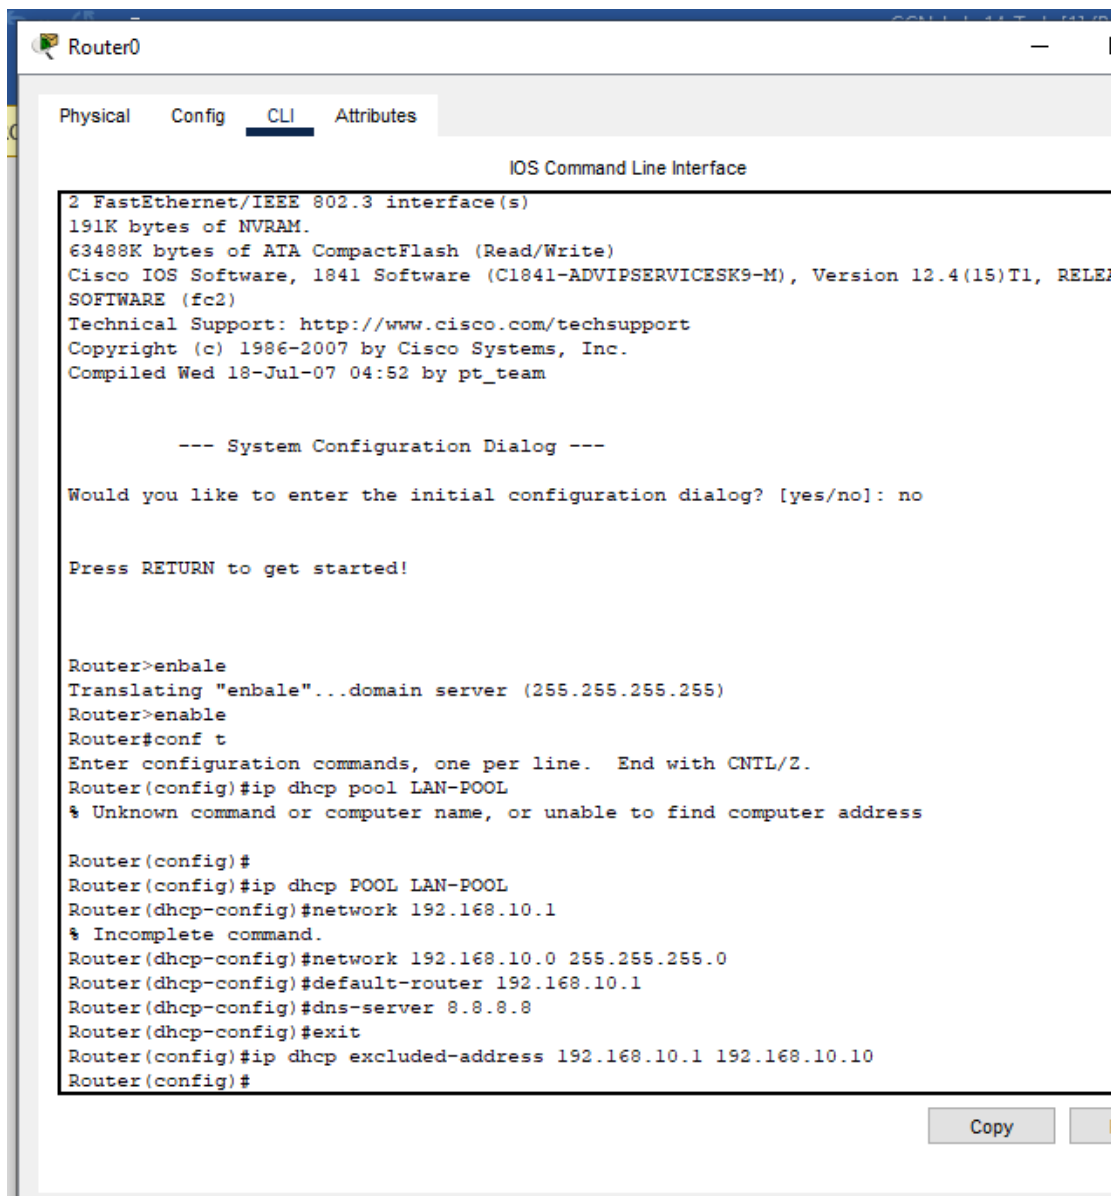

```
Router>enbale
Translating "enbale"...domain server (255.255.255.255)
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp pool LAN-POOL
% Unknown command or computer name, or unable to find computer address

Router(config)#
Router(config)#ip dhcp POOL LAN-POOL
Router(dhcp-config)#network 192.168.10.1
% Incomplete command.
Router(dhcp-config)#network 192.168.10.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.10.1
Router(dhcp-config)#dns-server 8.8.8.8
Router(dhcp-config)#exit
Router(config)#ip dhcp excluded-address 192.168.10.1 192.168.10.10
Router(config)#
Router(config)#interface fastethernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#
```

Copy

Paste

IOS Command Line Interface

```
Processor board ID FTX0947Z18E
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
191K bytes of NVRAM.
63488K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE
SOFTWARE (fc2)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team
```

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:

Press RETURN to get started!

```
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp POOL LAN-POOL2
Router(dhcp-config)#network 192.168.20.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.20.1
Router(dhcp-config)#dns-server 8.8.8.8
Router(dhcp-config)#exit
Router(config)#ip dhcp excluded-address 192.168.20.1 192.168.20.10
Router(config)#interface fastethernet 0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

Router(config-if)#
```

Copy

Paste

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Pinging 192.168.13.6 with 32 bytes of data:

Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Request timed out.
Reply from 192.168.10.1: Destination host unreachable.

Ping statistics for 192.168.13.6:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.13.6

Pinging 192.168.13.6 with 32 bytes of data:

Request timed out.
Reply from 192.168.13.6: bytes=32 time=12ms TTL=126
Reply from 192.168.13.6: bytes=32 time=11ms TTL=126
Reply from 192.168.13.6: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.13.6:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 12ms, Average = 8ms

C:\>ping 192.168.13.6

Pinging 192.168.13.6 with 32 bytes of data:

Reply from 192.168.13.6: bytes=32 time=13ms TTL=126
Reply from 192.168.13.6: bytes=32 time=8ms TTL=126
Reply from 192.168.13.6: bytes=32 time=3ms TTL=126
Reply from 192.168.13.6: bytes=32 time=25ms TTL=126

Ping statistics for 192.168.13.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 25ms, Average = 12ms

C:\>
```

