INSTRUCTIONS

AF3060 INVERTER DRIVES

RECTIFIER - 331X451AAG02, 3, 4
331X257ACG04

OPERATION — TROUBLE SHOOTING — REPAIR

GEK-62505

ELEMENTARY	36C764771AB
CONNECTION	36C764772AB

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company

GENERAL ELECTRIC

demark of the General Electric Co

FP-800-F (6-63) PRINTED IN U.S.A.

RES 20 VALUE TABLE

CATALOG NO.	INPUT	RES 20
33X257AAG01	230V	10 Ω
G02	460V	5 Ω
G03	230V	10 Ω
G04	430V	5 Ω

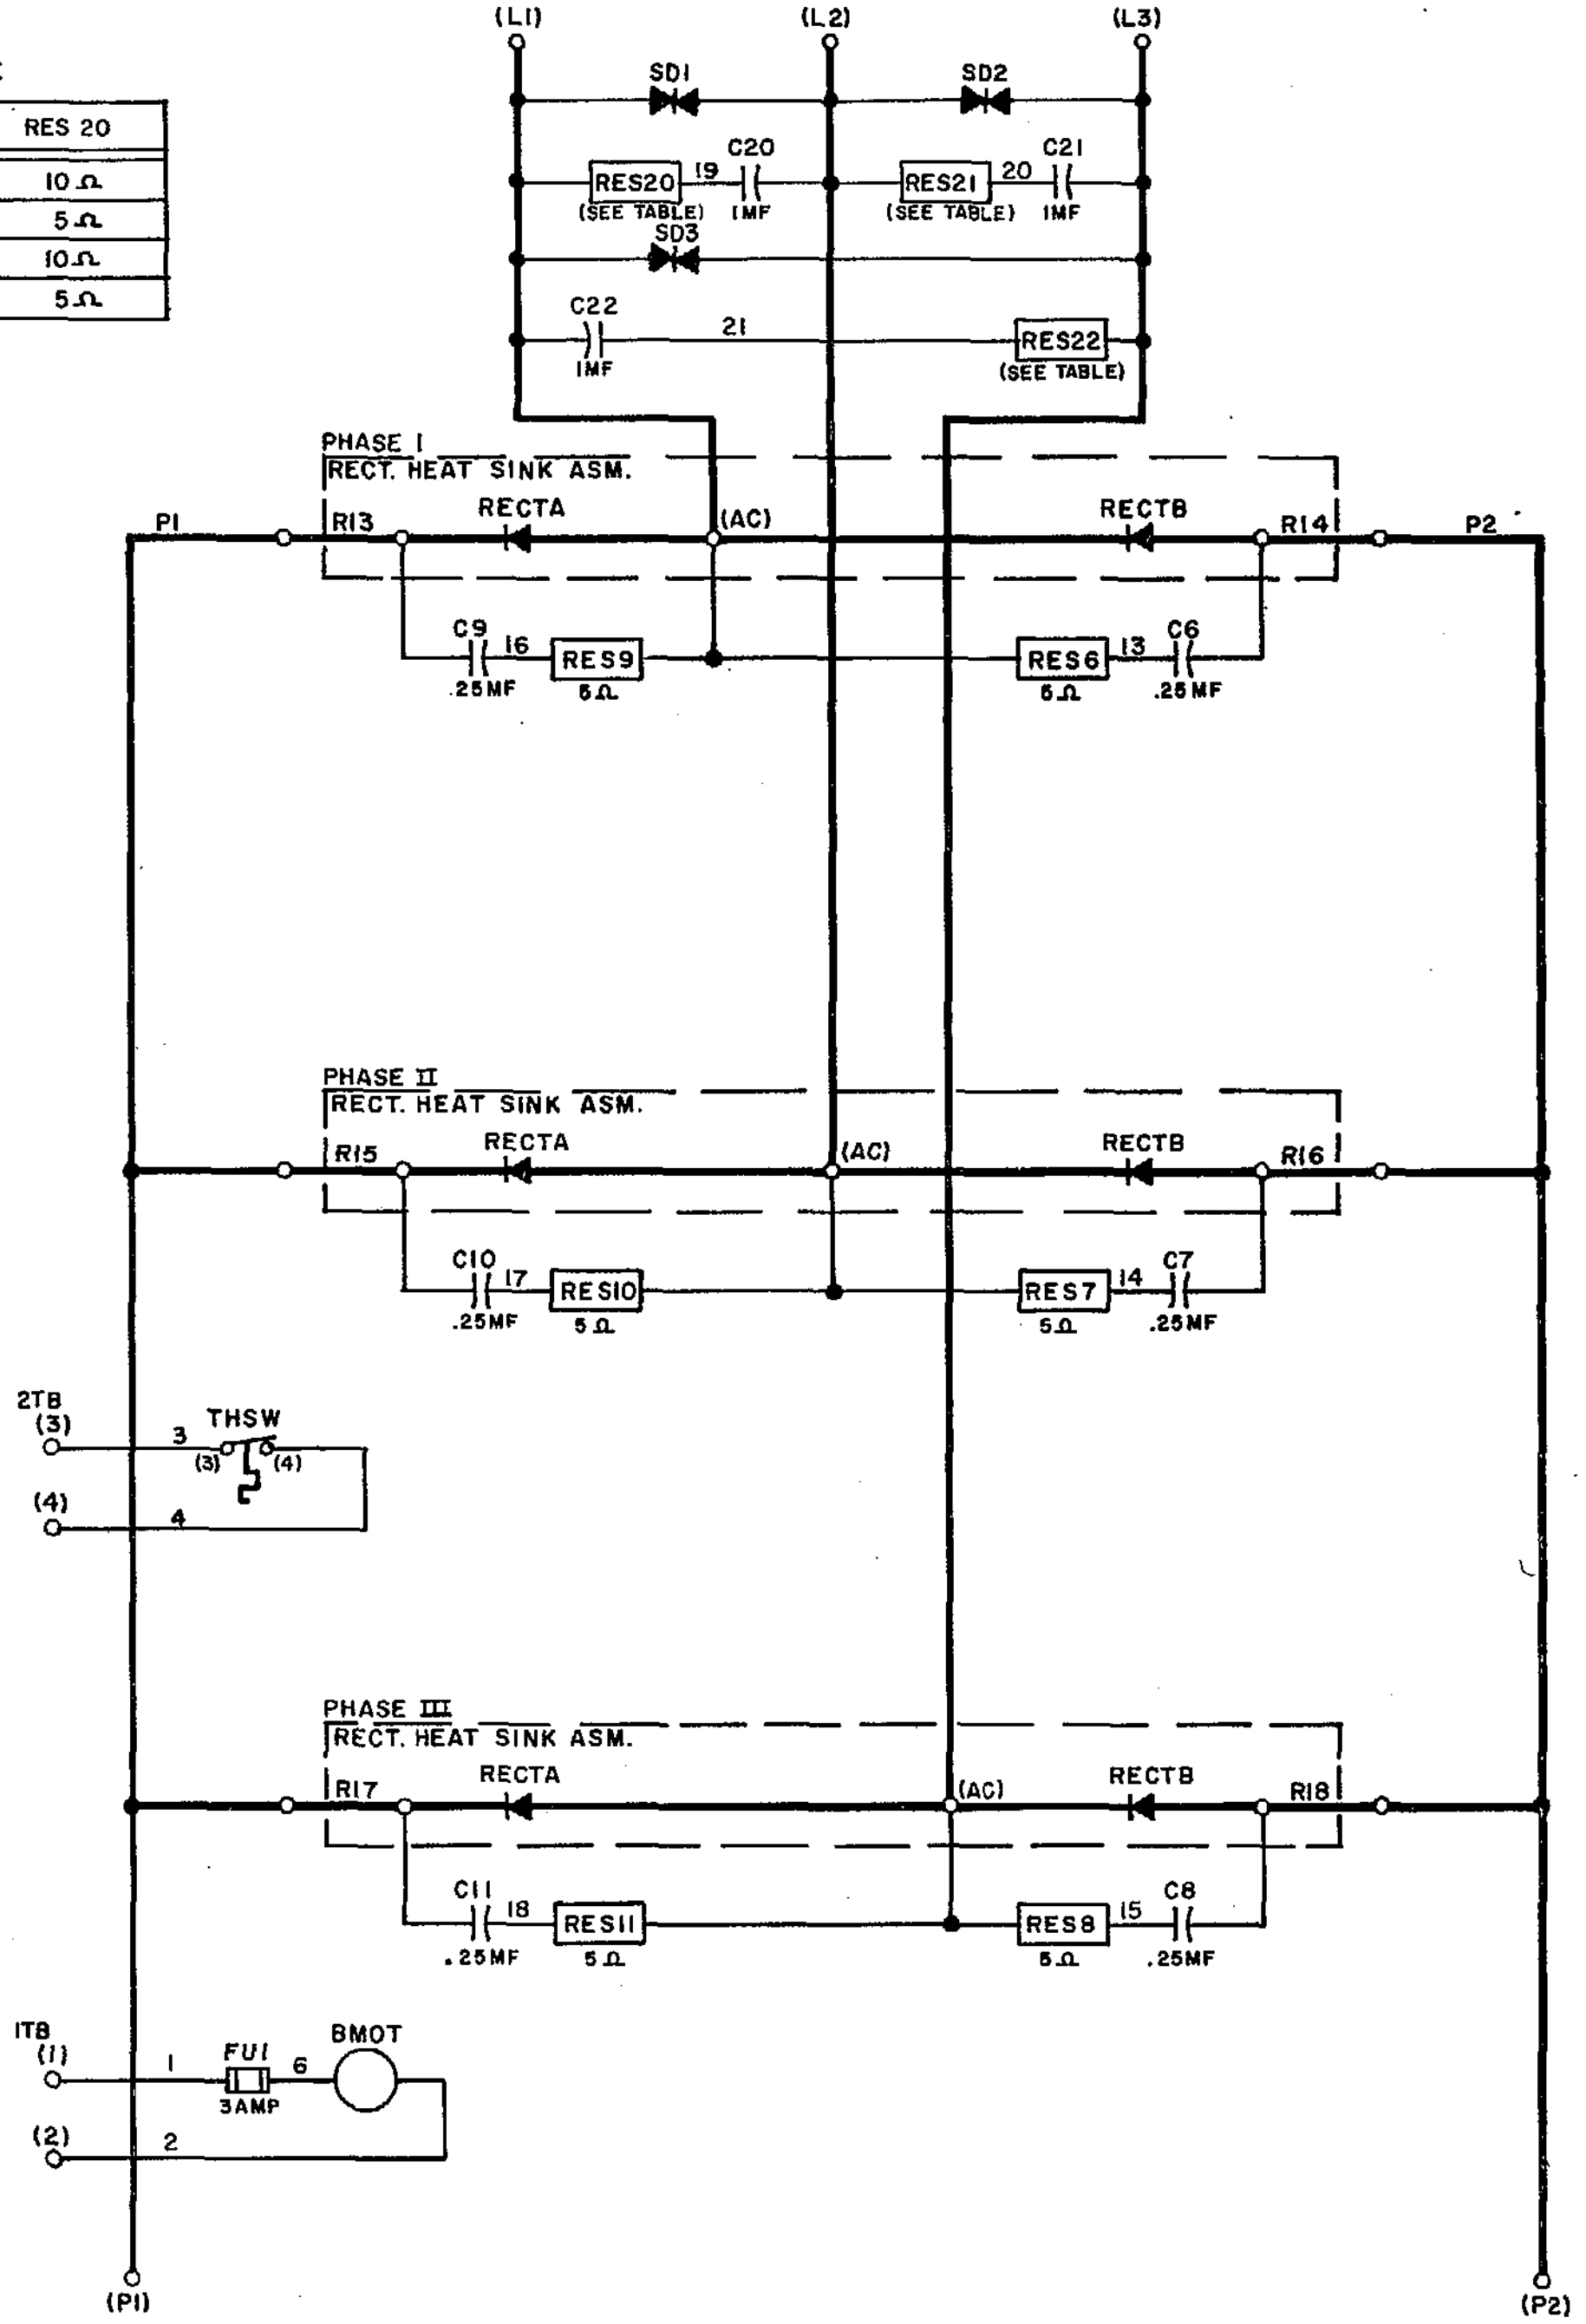

NOMENCLATURE

BMOT	-BLOWER MOTOR
C6 THRU C11	-RECTIFIER SNUBBER CAPACITORS
FU1	-BLOWER MOTOR FUSE
RECTA, RECTB	-RECTIFIERS
RES6 THRU RES11	-RECTIFIER SNUBBER RESISTORS
THSW	-TEMPERATURE SWITCH
SD1 THRU SD3	-TRANSIENT SUPPRESSION THYRECTOR
RES20 THRU RES22	-TRANSIENT SUPPRESSION RESISTOR
C20 THRU C22	-TRANSIENT SUPPRESSION CAPACITOR

NOTES

1. REFER TO THE INSTRUCTION BOOK FOR DETAILED DESCRIPTION AND OPERATION.
2. MF - MICROFARAD

PROPRIETARY INFORMATION OF GENERAL ELECTRIC COMPANY

G. Mattie MAY 13, 1971

Oct. 28.

APPROVALS

SPEED VARIATOR
ERIE, PA.

36C764771AB

No revisions are to be made to this drawing without the specific approval of the Development Engineering Section of the Speed Variator Department.

REVISIONS

PRINTS TO

5QC(BK)5	5L(BW)
5P(BW)	5D(BK)
	5E(BK)100
	5B(3)23
	5(TS)50
	5(QC)B

UNLESS OTHERWISE SPECIFIED USE THE FOLLOWING:—

APPLIED PRACTICES	SURFACES	TOLERANCES ON MACHINED DIMENSIONS FRACTIONS	DECIMALS	ANGLES
	✓	±	±	±

GENERAL ELECTRIC

TITLE ELEMENTARY DIAGRAM
RECTIFIER MODULE

FIRST MADE FOR STANDARD LINE AF 3060

36C764771AB
CONT ON SHEET SH NO.

GENERAL ELECTRIC 36C764772AB
CONT ON SHEET SH NO.

UNLESS OTHERWISE SPECIFIED USE THE FOLLOWING:—				
APPLIED PRACTICES	SURFACES	TOLERANCES ON MACHINED DIMENSIONS FRACTIONS	DECIMALS	ANGLES
	√	+ −	+ −	+ −

TITLE CONNECTION DIAGRAM
RECTIFIER MODULE-230V
FIRST MADE FOR STANDARD LINE AF 3060

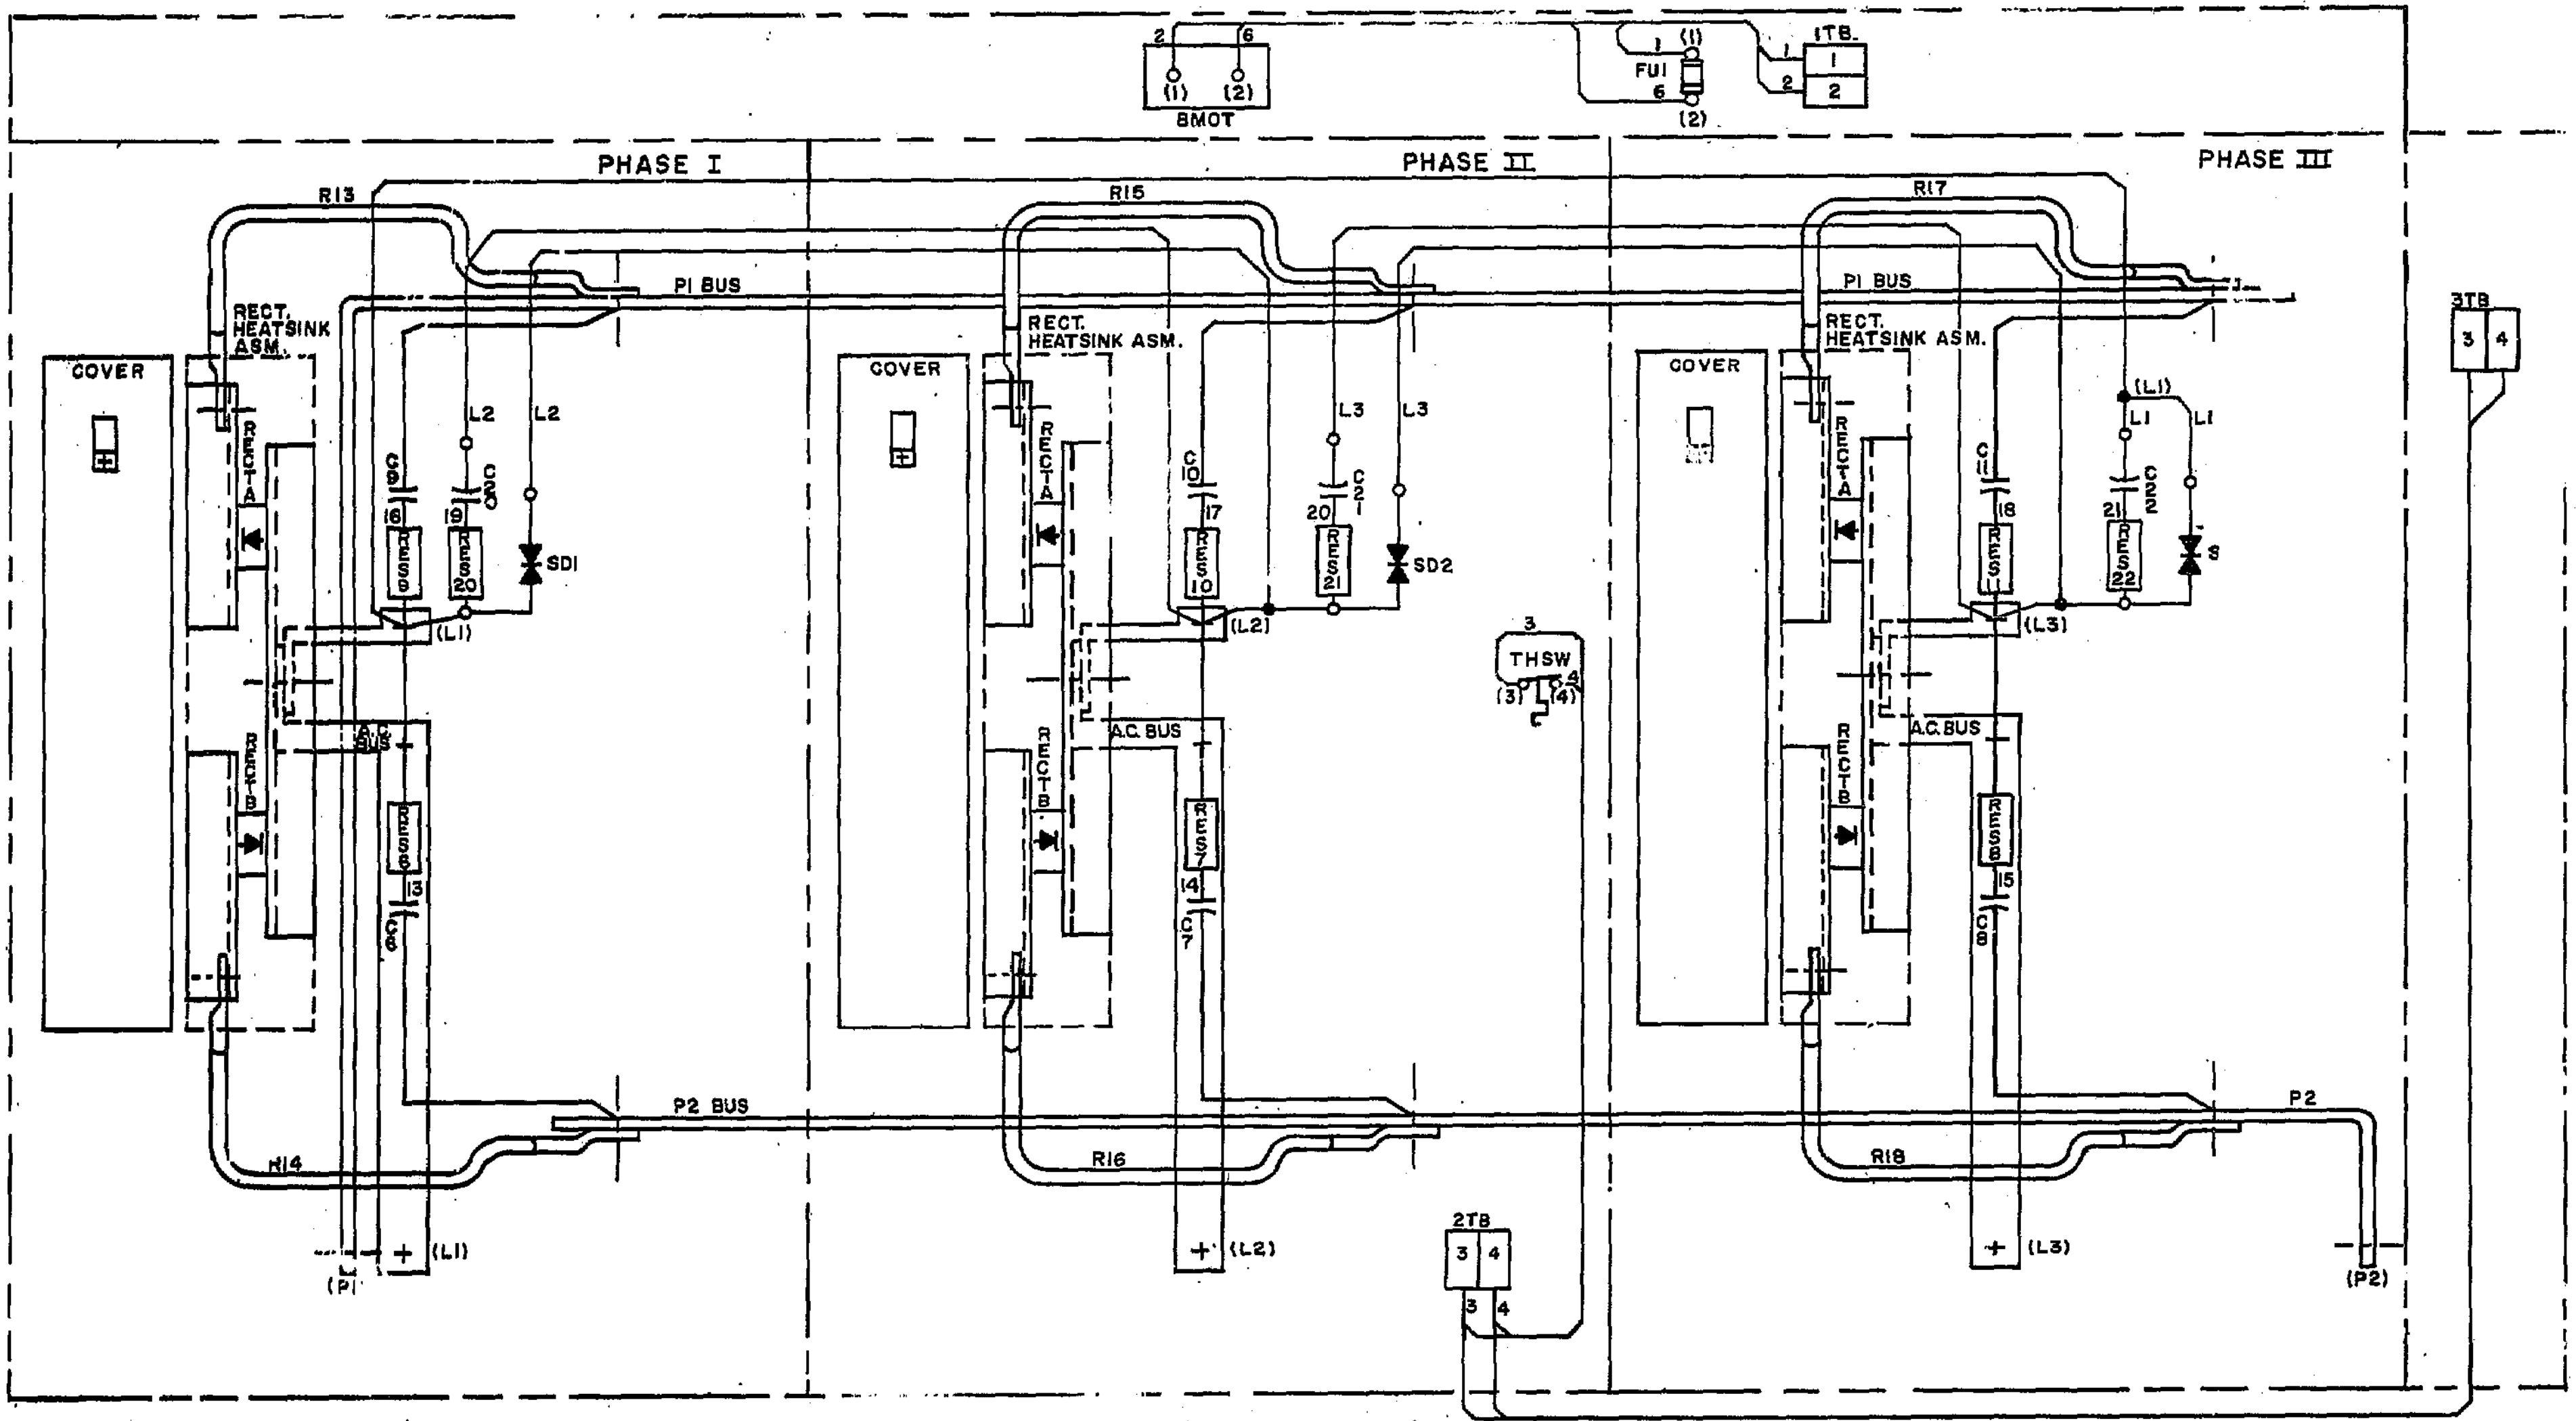

NOTES:

1. ALL POWER WIRING IS EITHER BUS OR CONNECTORS CALL FOR ON THE MECHANICAL ASSEMBLY DRAWINGS.
2. WIRES ARE MARKED AS INDICATED, OF #18 BLACK.
3. THE TOP SNUBBER WITH AC SUPPRESSION IS A PREWIRED ASSEMBLY # 36D877154ABG03 FOR 460 VOLT INPUT AND # 36D877154ABG04 FOR 230 VOLT INPUT AND SHOULD BE CONNECTED TO POINTS (L1), (L2) & (L3) AND (R13), (R15) & (R17) AS SHOWN.

WIRE	CONNECTION
	#18 BLACK
1	FU1(1),1TB(1)
2	BMOT(1),1TB(2)
3	THSW(3),2TB(3)
4	THSW(4),2TB(4)
6	FU1(2),BMOT(2)

No revisions are to be made to this drawing without the specific approval of the Development Engineering Section of the Speed Variator Department.

REVISIONS		PRINTS TO	
1	J. Holsopple Nov 15 1972 RJV	5QC(BK) 5	
		5P(BW)	5D(BK)
		5L(BW)	5E(BK) 100
			5B(3)23
			5(TS)50
			5(QC)B

MADE BY O. Mottis MAY 13, 1971
ISSUED D.J. Kosinee OCT. 28, 1971
APPROVALS RJM 6/83
SPEED VARIATOR DIV OR DEPT.
ERIE, PA. LOCATION
36C764772AB
CONT ON SHEET SH NO.

PROPRIETARY INFORMATION OF THE GENERAL ELECTRIC COMPANY

DRAWING NO. 36C764772AB CONT ON SHEET SH NO. REV NO Ø 1

DRAWING NO. 36C764772AB CONT ON SHEET