INSTRUCTIONS

INTERFACE CARD

193X527ACG01

FOR USE WITH REGENERATIVE VALUTROL* SCR DRIVE

ELEMENTARY DIAGRAM	36C764155AC
CARD DIAGRAM	36D865548AC

REFER TO THE DRIVE SYSTEM INSTRUCTIONS AND ELEMENTARY DIAGRAMS FOR DESCRIPTIONS, ADJUSTMENTS AND ON—CARD JUMPER CONNECTIONS.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to General Electric Company.

GENERAL ELECTRIC


*TRADEMARK OF GENERAL ELECTRIC COMPANY, U.S.A.

GEK-45113C (8/85) 1M (P)

GENERAL ELECTRIC | 36C764155AC

ELEMENTARY DIAGRAM
INTERFACE CARD

STANDARD LINE
193X527ACG01

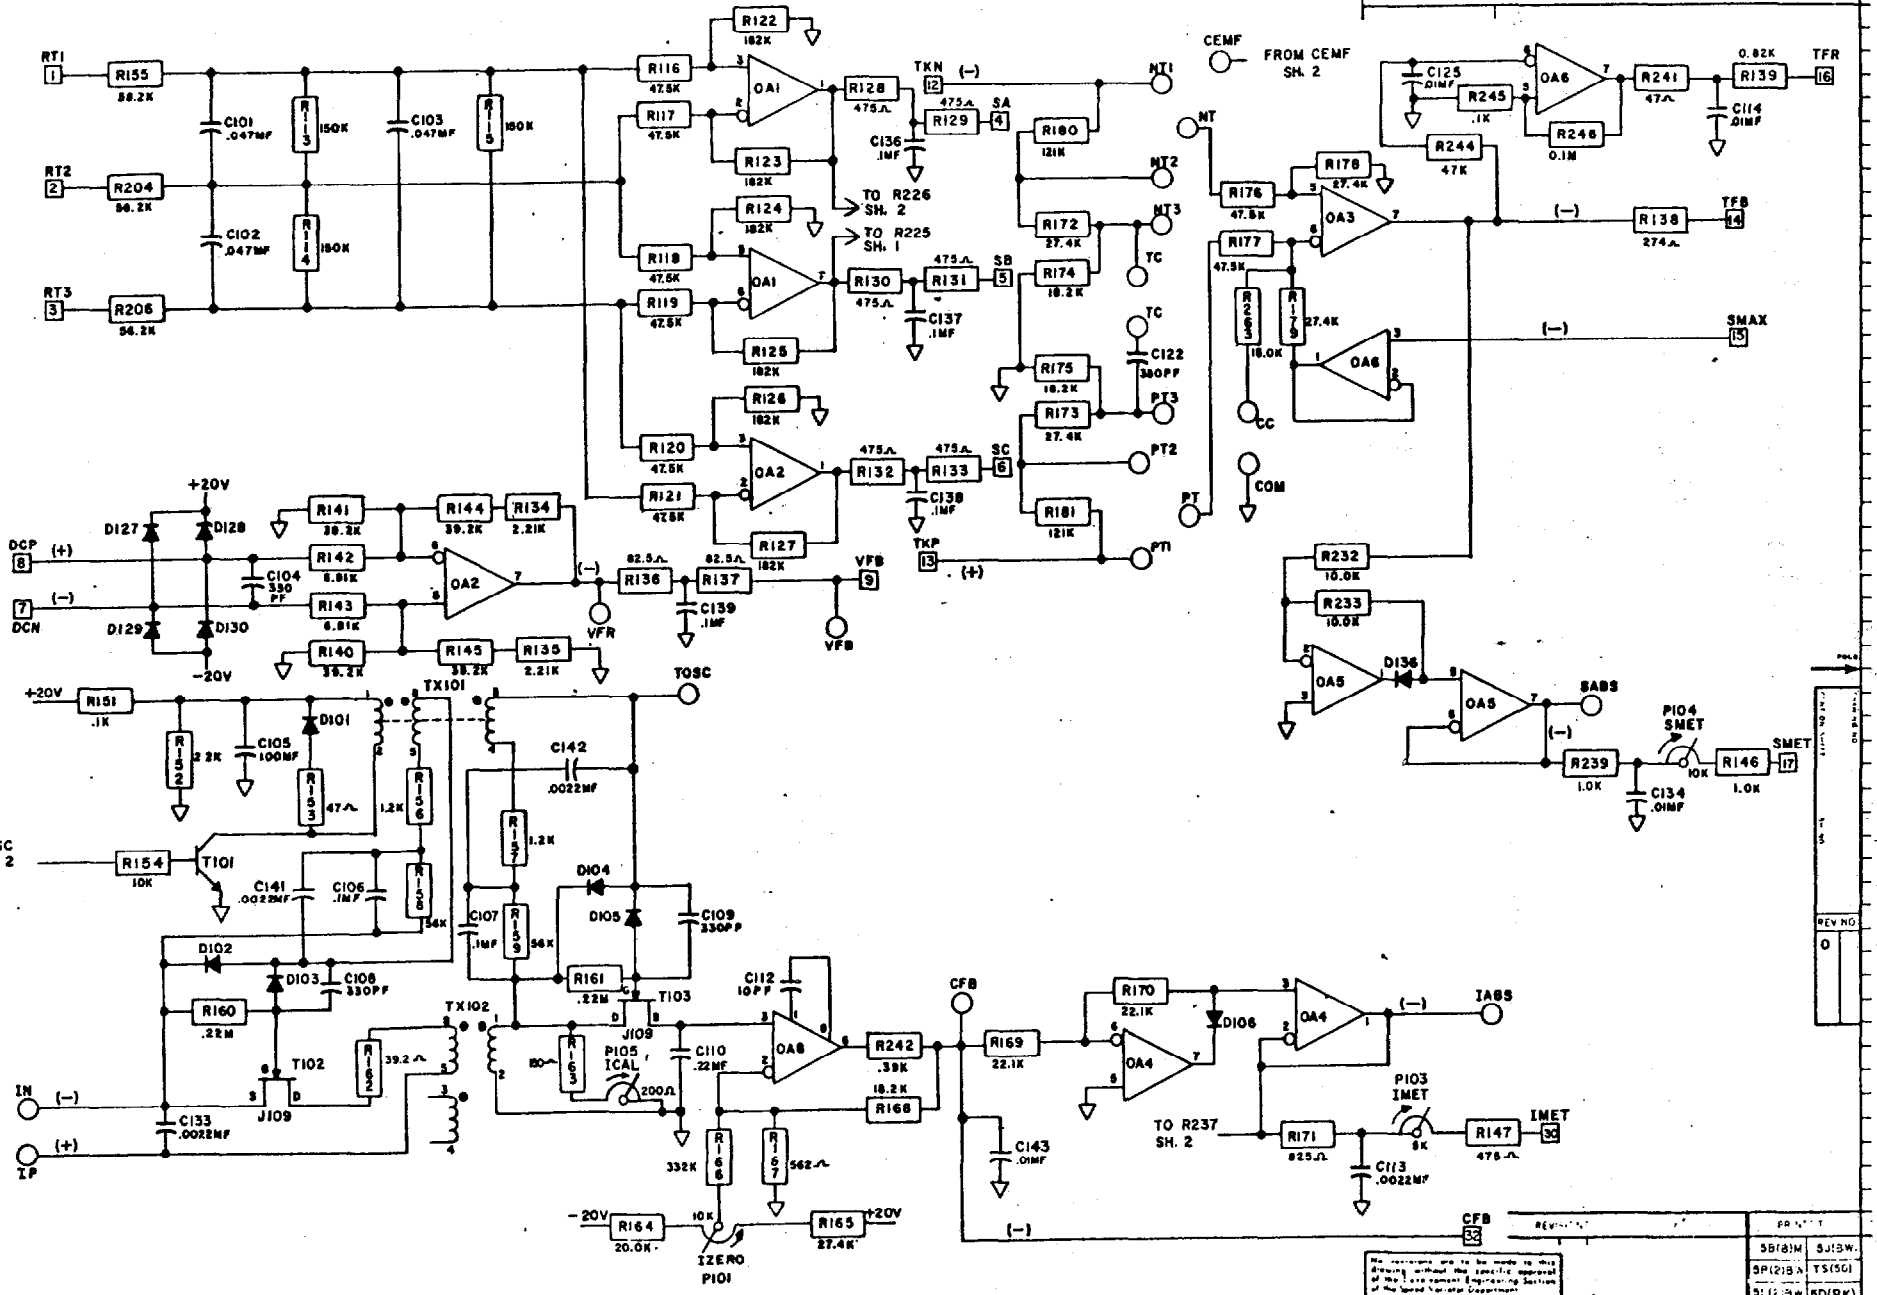


SB(8)M	SJ(BW)
SP(21B)A	TS(SG)
SL(E)BW	SD(BK)
	SE(AG S)

REV. NO. 0

AUG 21,1981

SPEED VARIATOR
ERIE, PA

36C764155AC
2

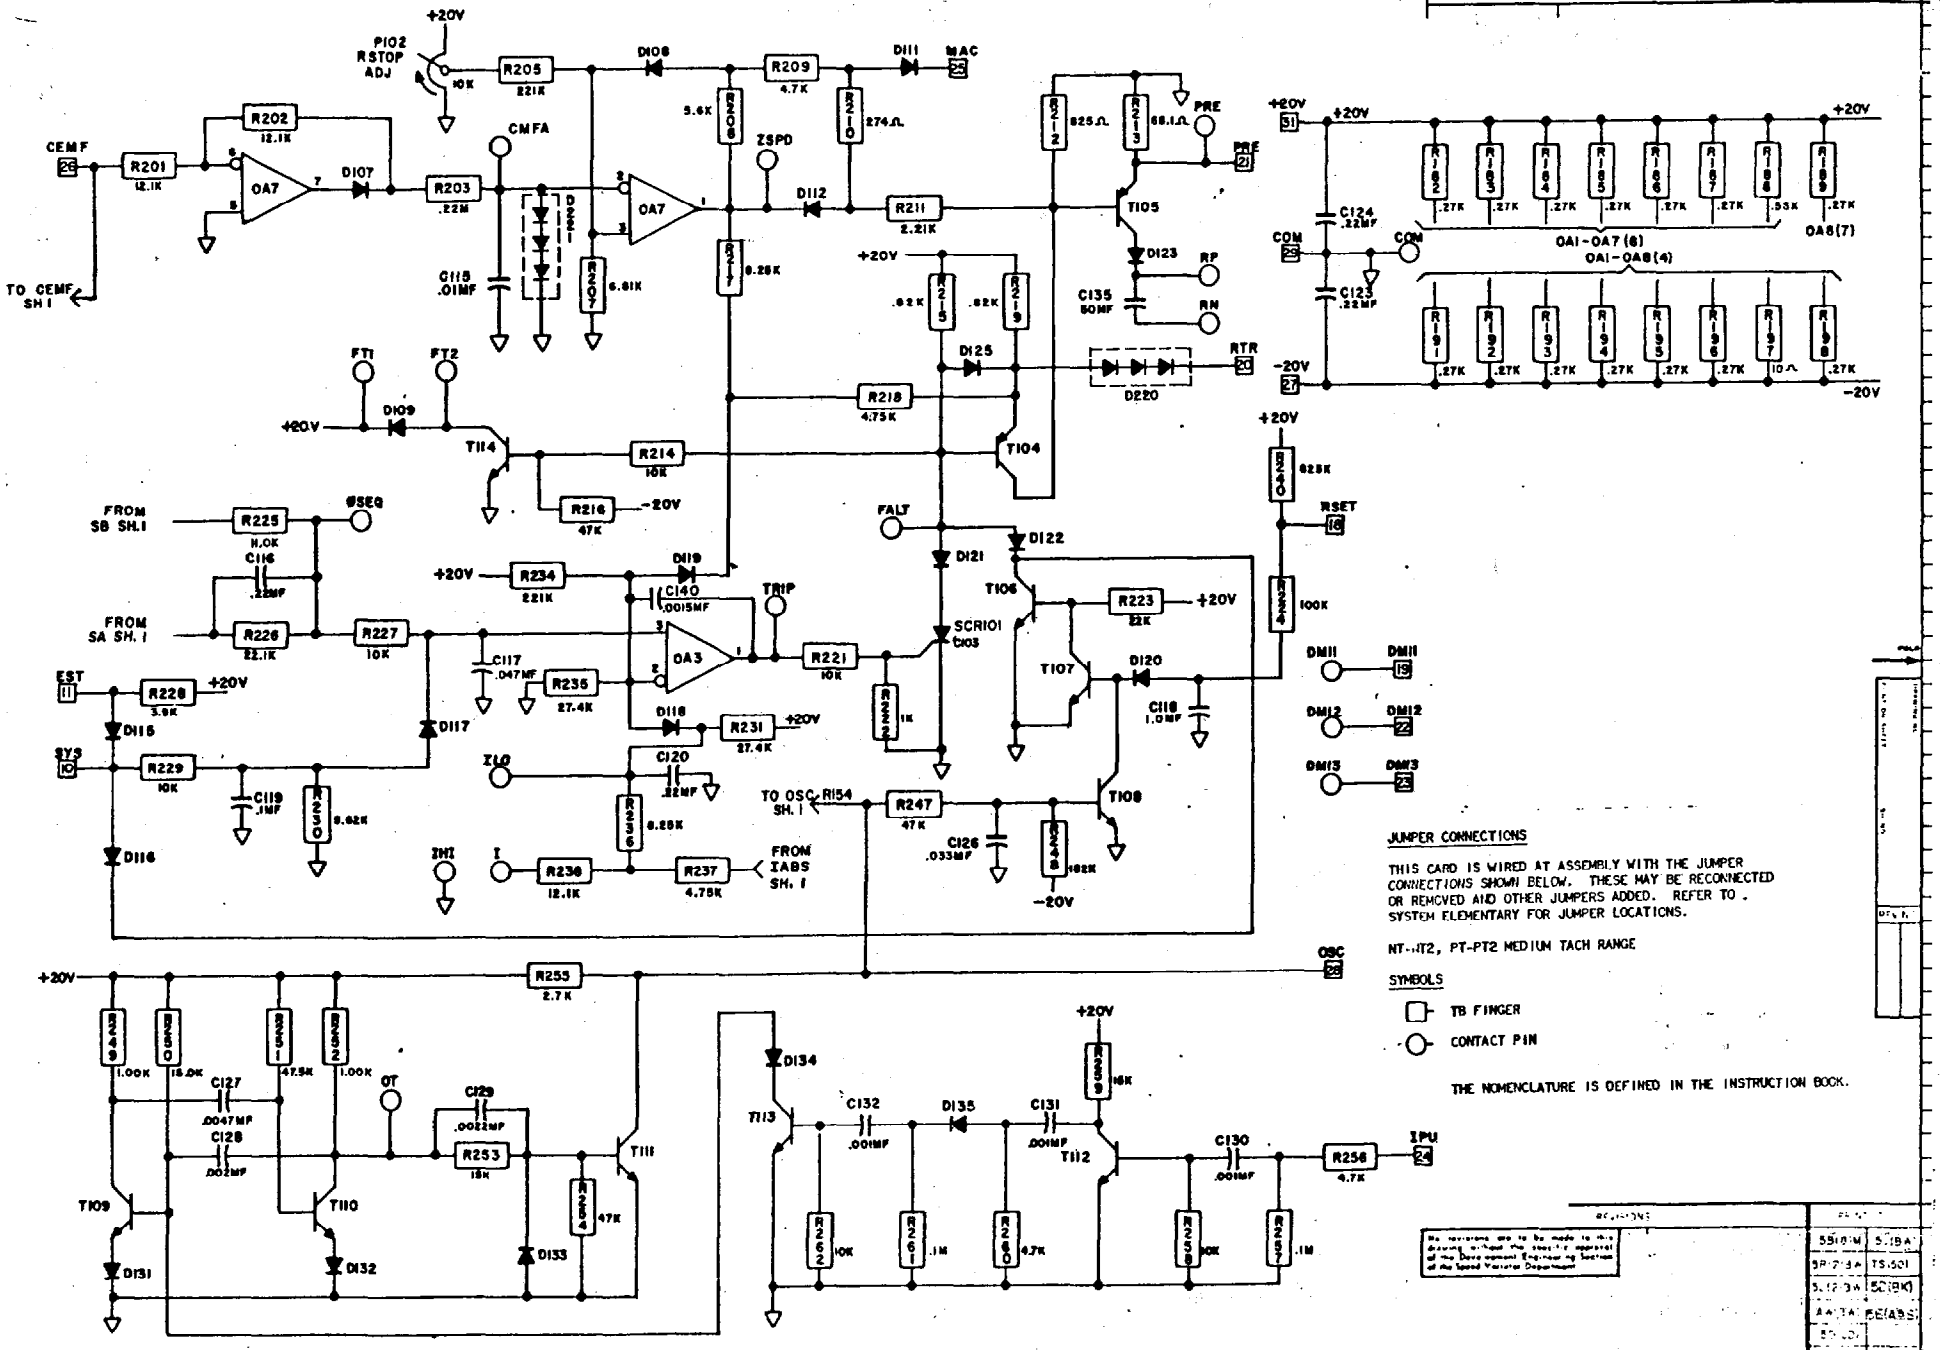

JUMPER CONNECTIONS

THIS CARD IS WIRED AT ASSEMBLY WITH THE JUMPER CONNECTIONS SHOWN BELOW. THESE MAY BE RECONNECTED OR REMOVED AND OTHER JUMPERS ADDED. REFER TO SYSTEM ELEMENTARY FOR JUMPER LOCATIONS.

NT-IT2, PT-PT2 MEDIUM TACH RANGE

SYMBOLS

TB FINGER

CONTACT PIN

THE NOMENCLATURE IS DEFINED IN THE INSTRUCTION BOOK.

REVISIONS

No revisions are to be made to this drawing without the specific approval of the Drive Component Engineering Section of the Speed Variator Department

55(6)M	5(18)A
5P(12)A	TS(60)
5(12)W	5C(8K)
AA(7)A	BE(ABS)

AUG. 21, 1981
APR 26, 1982

SPEED VARIATOR
ERIE, PA

36C764155AC

GENERAL ELECTRIC 360B65548AC

TITLE PRINTED CIRCUIT DIAGRAM
INTERFACE CARD

193X527AC001


HOLE TABULATION


ALL HOLES .040 DIA. EXCEPT
THE HOLES TABULATED BELOW

A	.032	48
B	.052	29
C	.128	32
D	.157	4
E	.070	59


NOTE


CARD SIZE 12.50 +.000 −.010 X 4.00 +.000 −.000

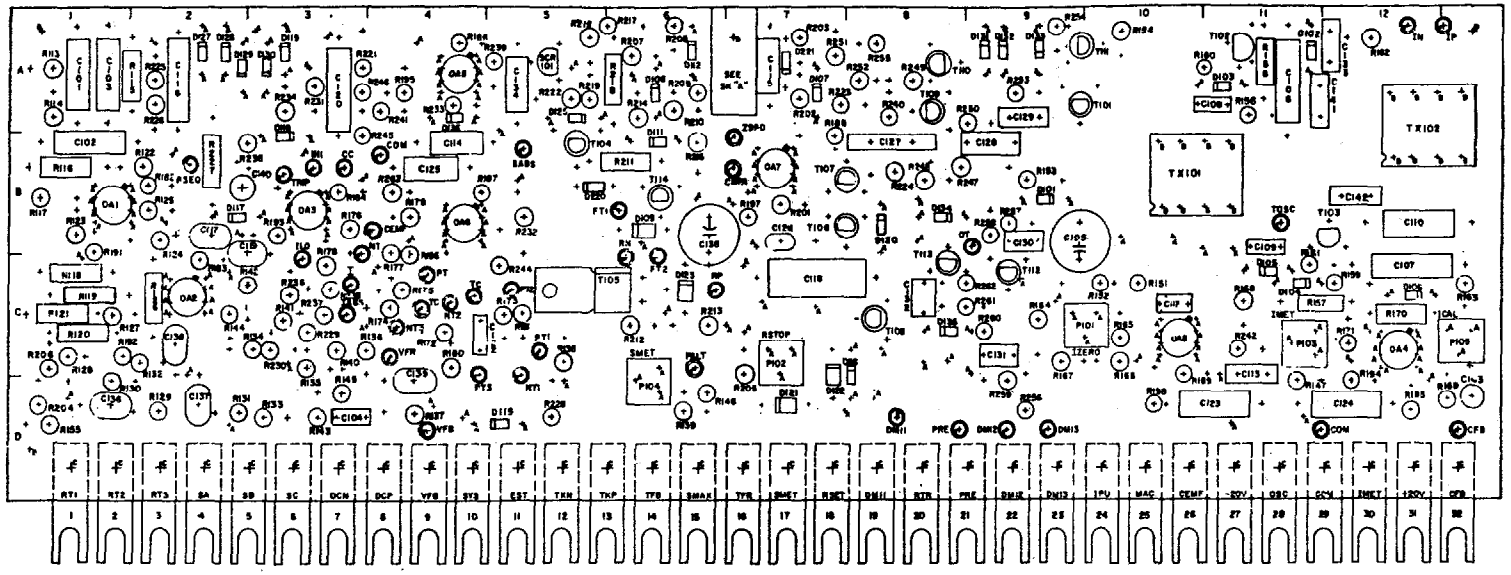



TRANSISTOR LEAD SKETCHES

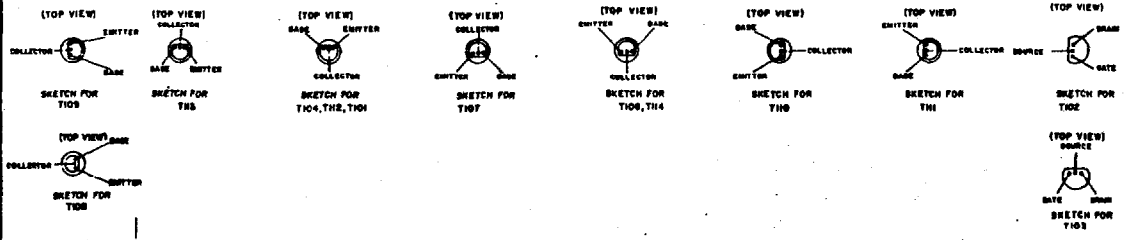

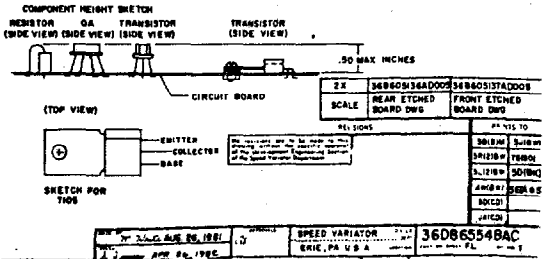

2X	360B65134AD002	360B65137AD008
SCALE	REAR ETCHED BOARD DWG	FRONT ETCHED BOARD DWG

SPEED VARIATOR
ERIE, PA U.S.A.
360B65548AC