INSTRUCTIONS

GEK-45134

MAIN CONTROL CARD
193X529BBG02

Elementary Diagram	36D870012AA
Card Diagram	36C764416AA

Refer to the Drive System Instructions and Elementary Diagrams for descriptions, adjustments and on-card jumper connections.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.

GENERAL ELECTRIC

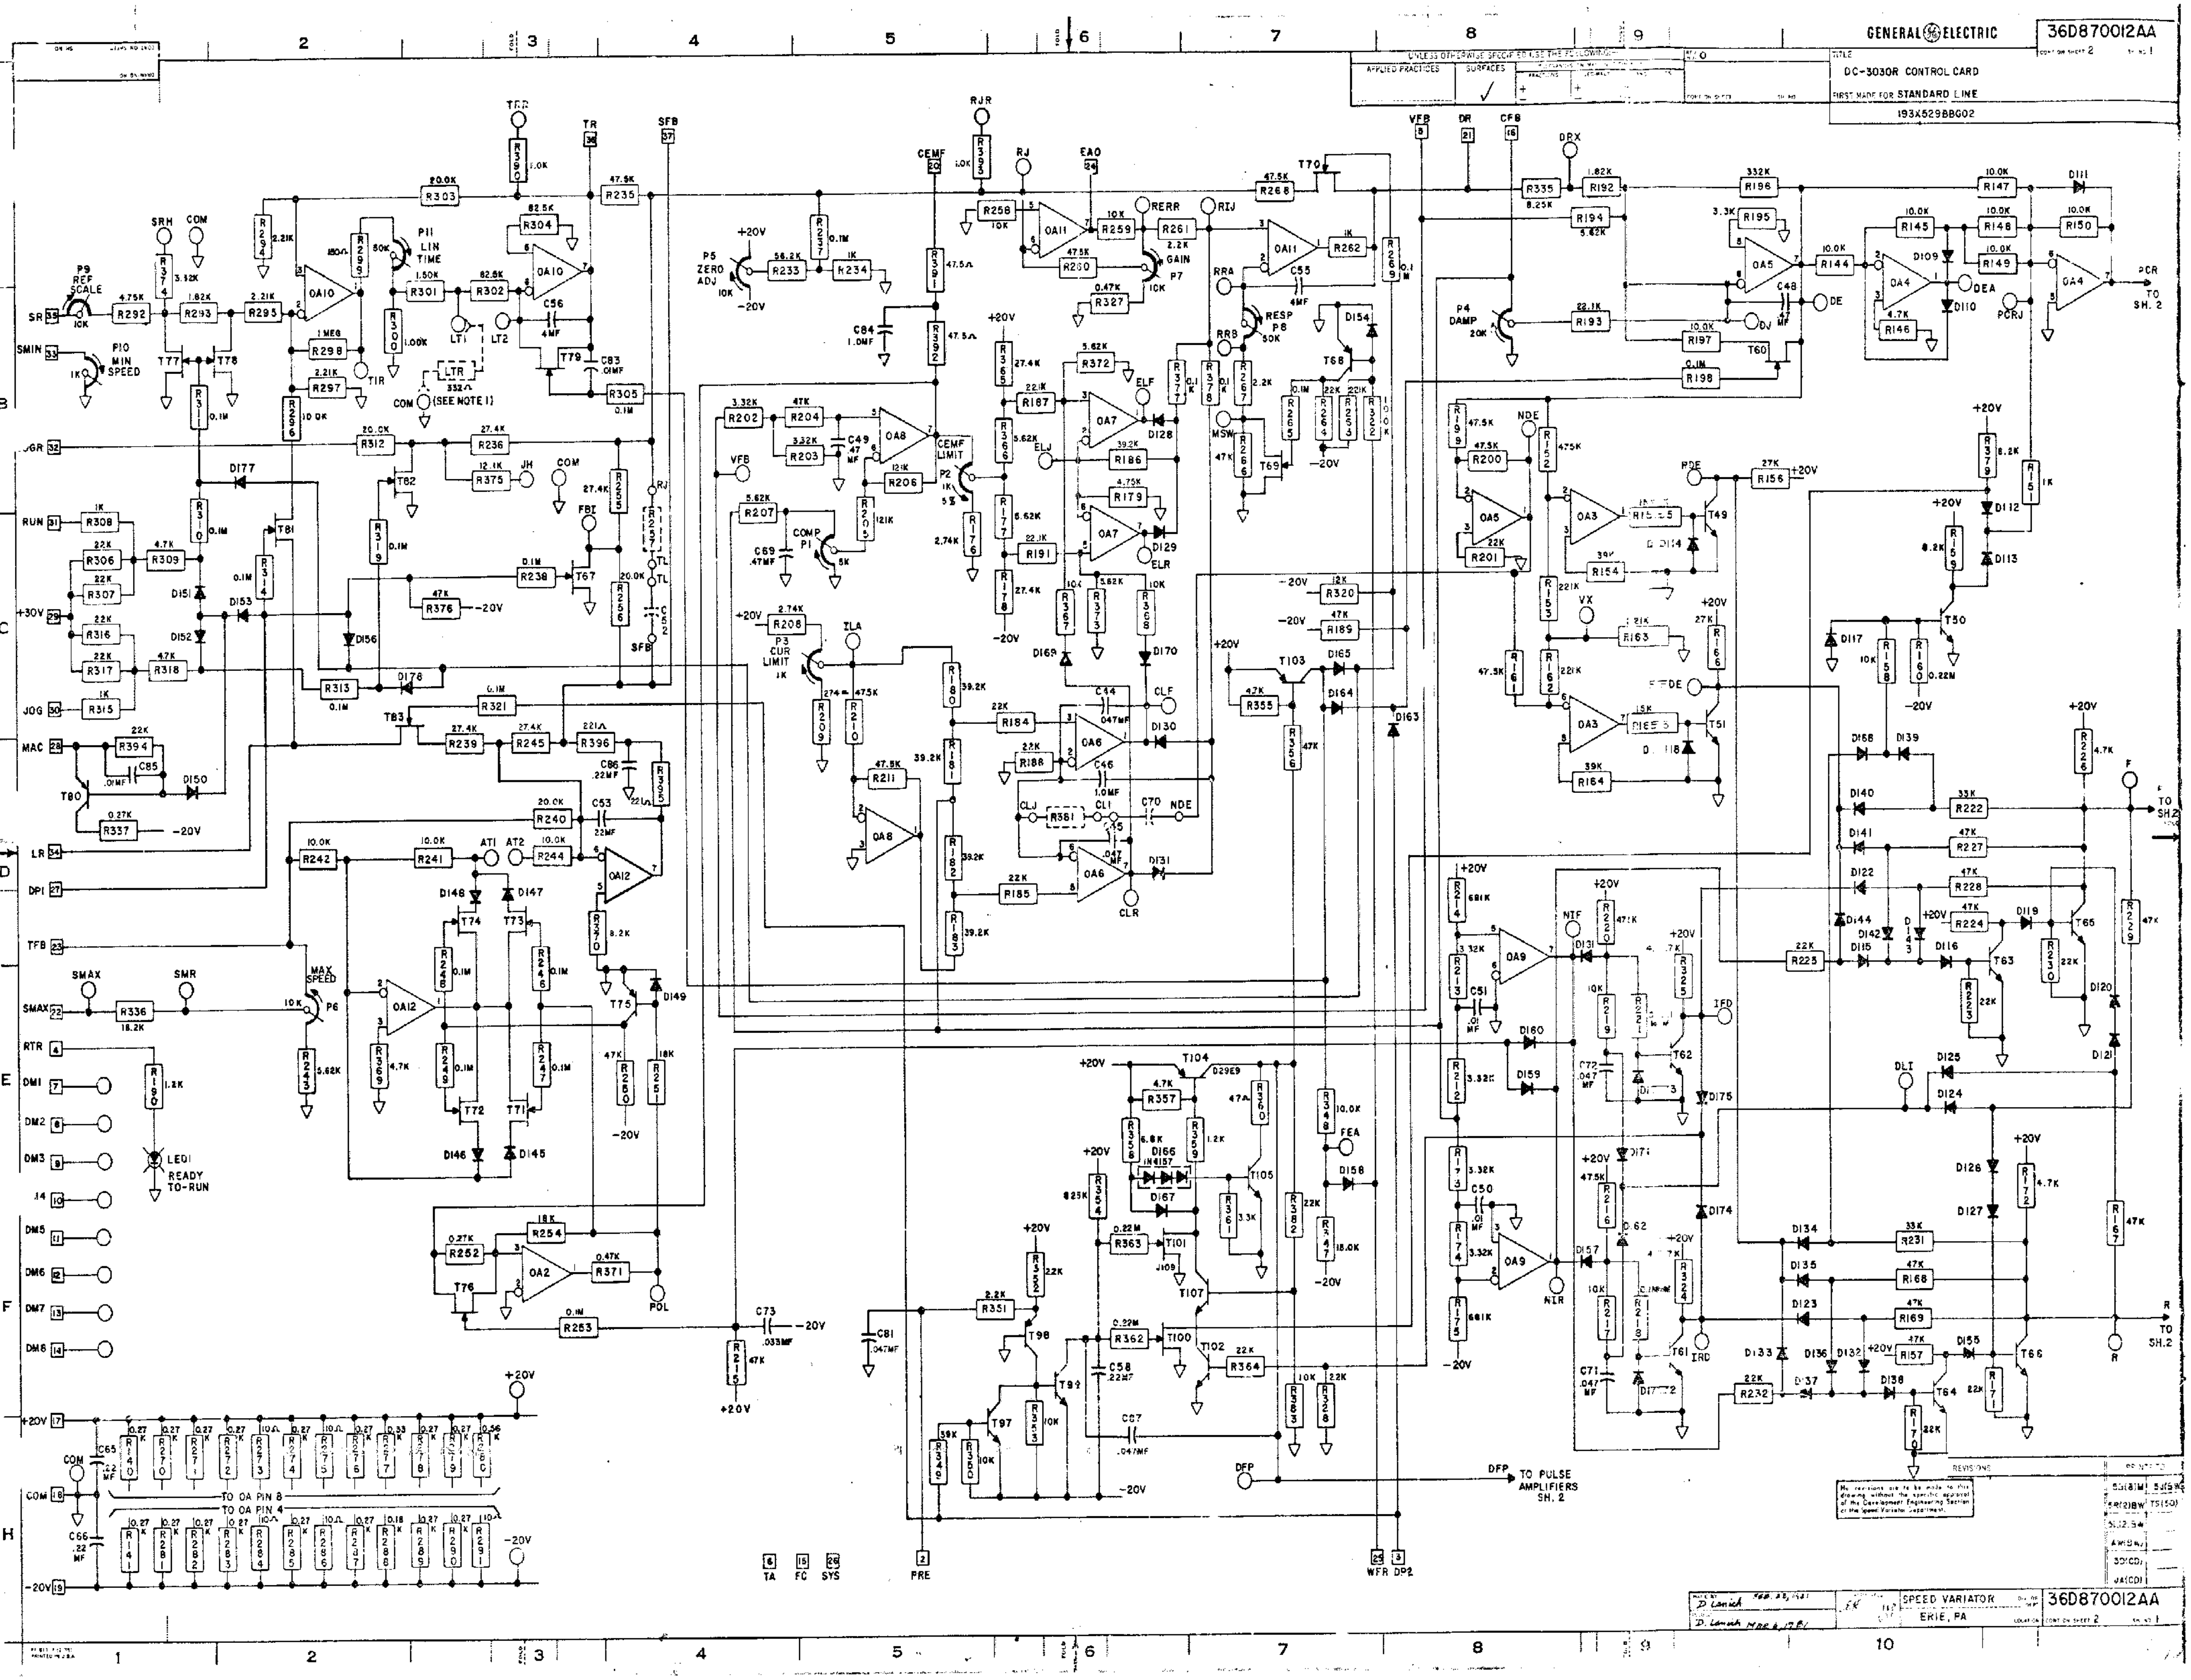

No revisions are to be made to this drawing without the specific approval of the Development Engineering Section of the Speed Variator Department.

UNLESS OTHERWISE SPECIFIED USE THE FOLLOWING:

APPLIED PRACTICES	SURFACES
	✓

REVISIONS

PRINTED TO

5S(8)M	5S(5)G
5R(2)BW	TS(50)
5L(2)54	
AW(S4)	
3D(CD)	
4A(CD)	

GENERAL ELECTRIC

TITLE DC-3030R CONTROL CARD

FIRST MADE FOR STANDARD LINE

193X529BBG02

36D870012AA

CONT ON SHEET 2 SH NO 1

MADE BY D Lamich FEB. 28, 1981

ISSUED D. Lamich MAR 6, 1981

SPEED VARIATOR

ERIE, PA

GENERAL ELECTRIC

36D870012AA

CONT ON SHEET FL SH NO 2

UNLESS OTHERWISE SPECIFIED USE THE FOLLOWING

APPLIED PRACTICES	SURFACES			
	✓	+ −	+ −	+ −

TITLE DC-3030R CONTROL CARD

FIRST MADE FOR STANDARD LINE

193X529BBG02

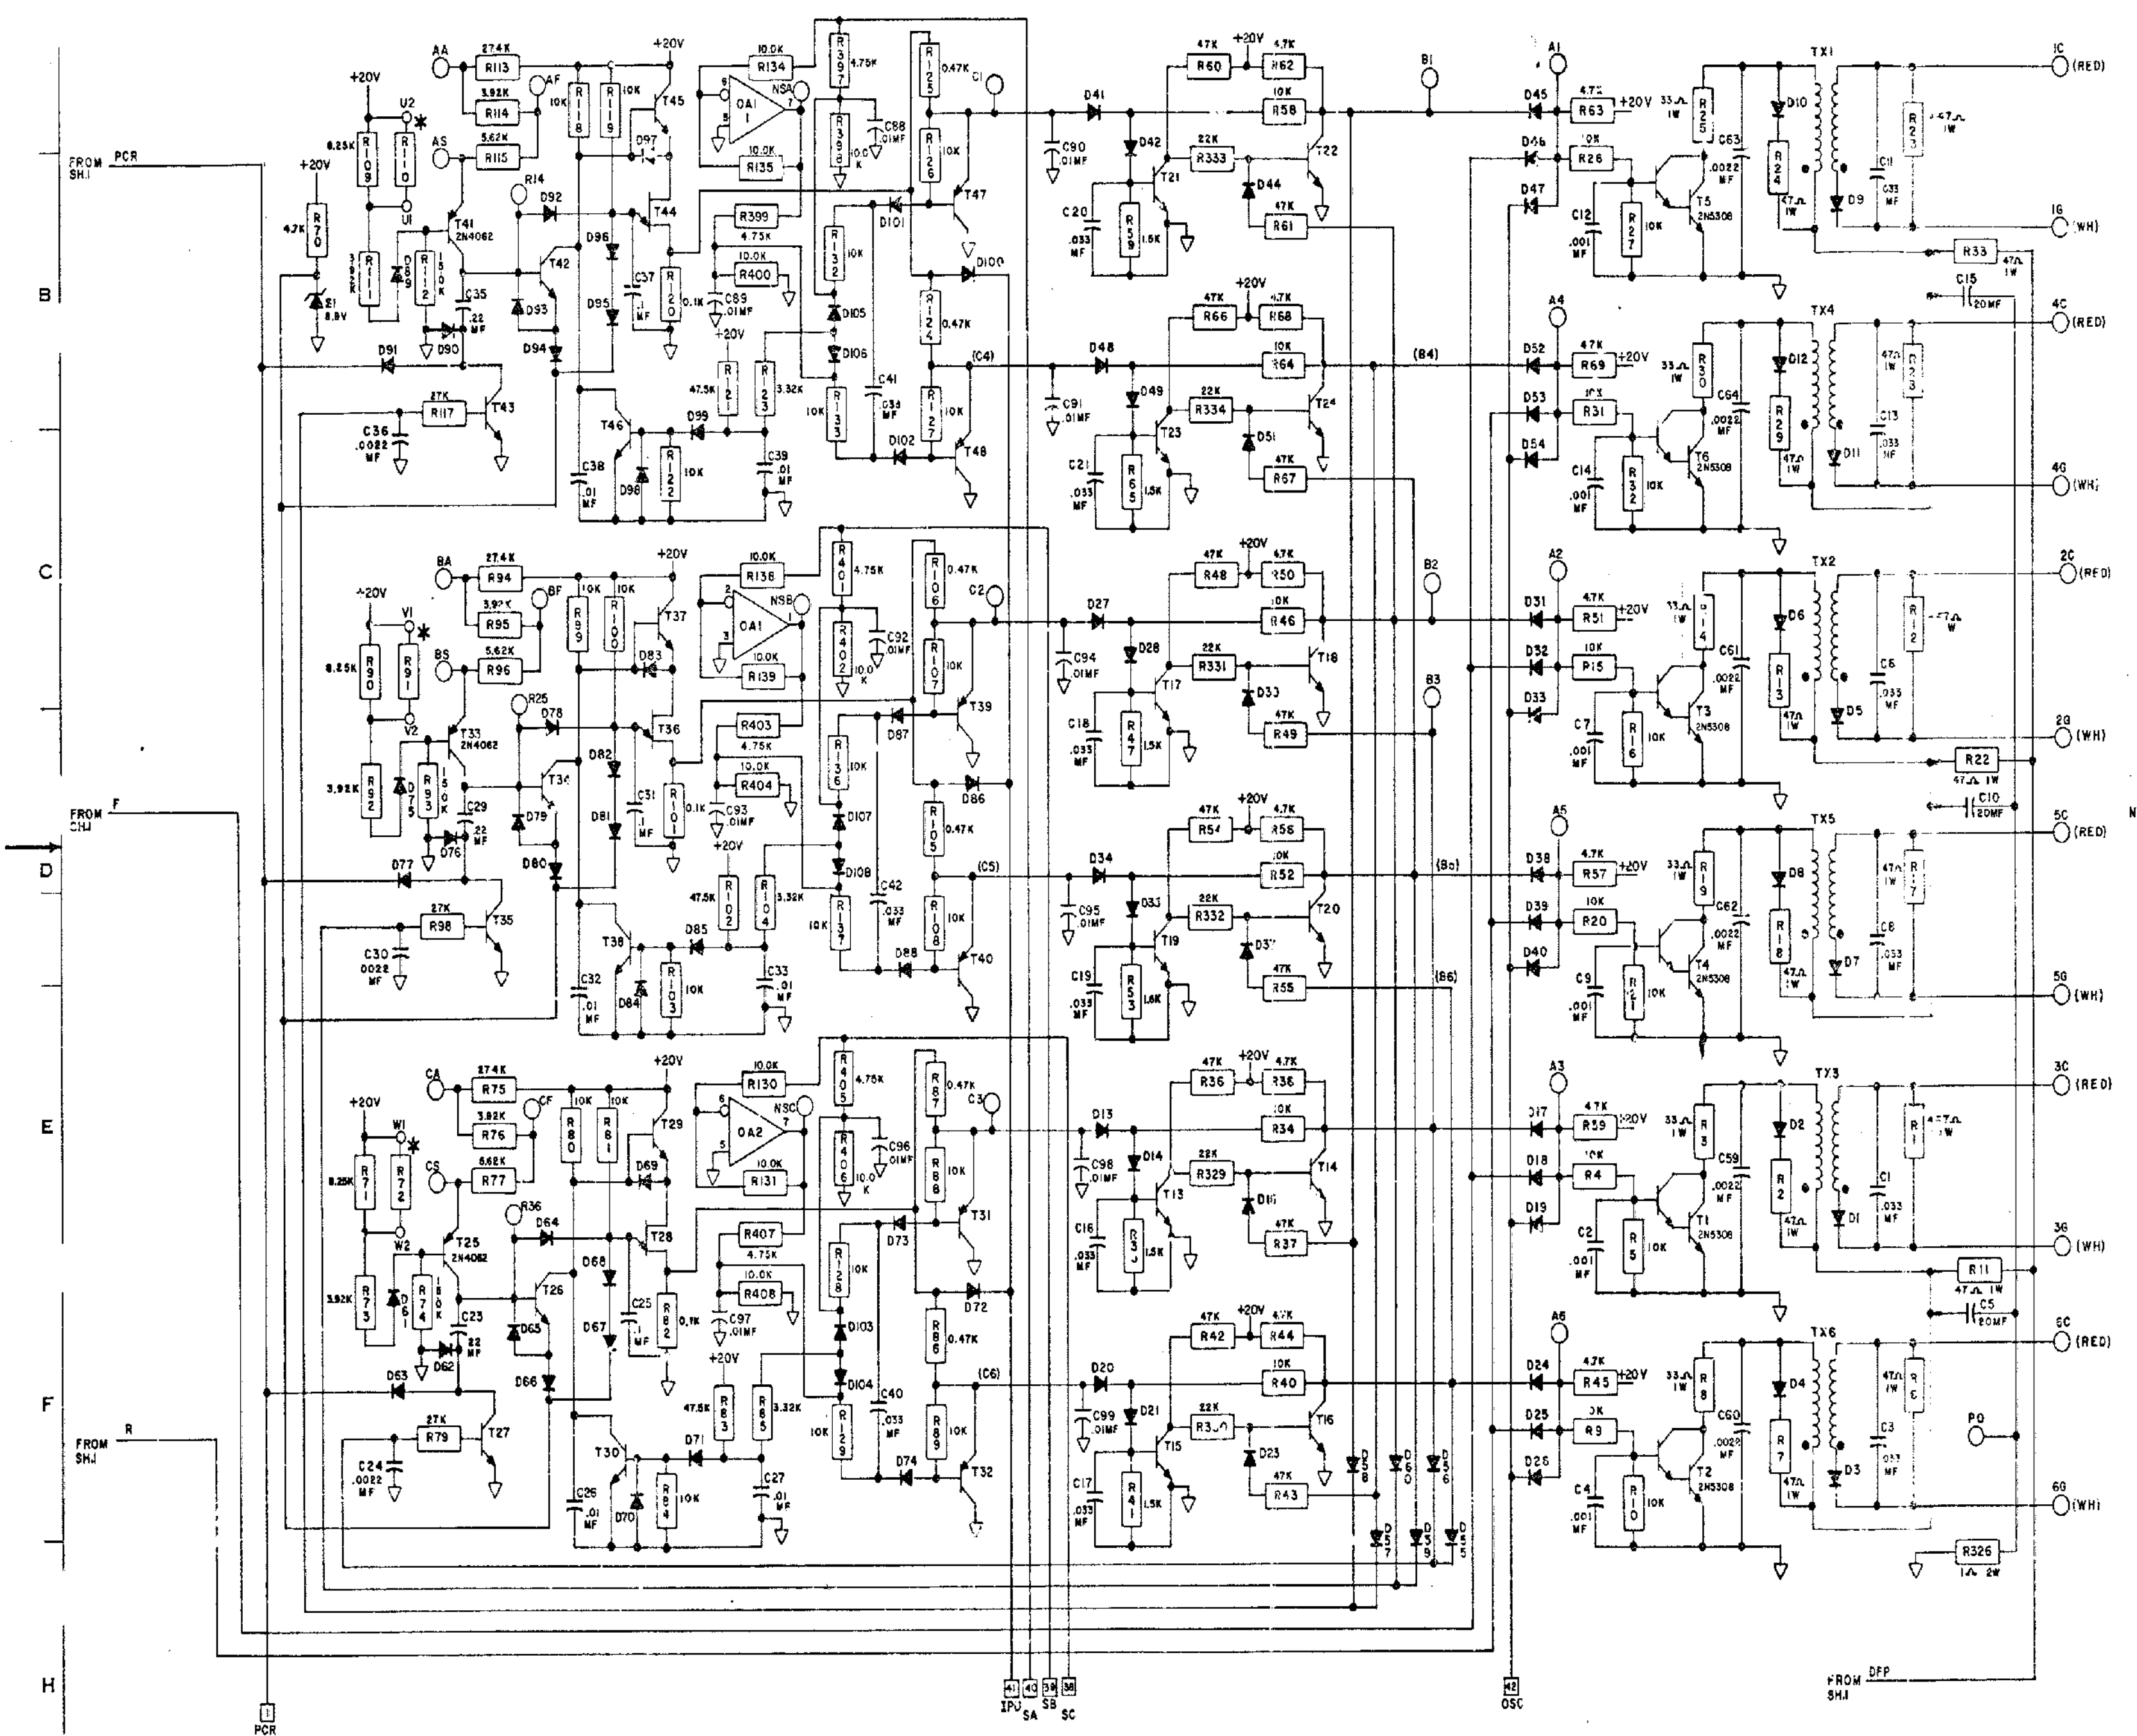

JUMPER CONNECTIONS

THIS CARD IS WIRED AT ASSEMBLY WITH THE JUMPER CONNECTIONS SHOWN BELOW. THESE MAY BE RECONNECTED OR REMOVED AND OTHER JUMPERS ADDED. REFER TO SYSTEM ELEMENTARY FOR JUMPER LOCATIONS.

AA-AS BA-BS CA-CS (60HZ)

SRH-COM JH-COM (HIGH REFERENCE RANGE)
AT1-AT2 (AC TACH)

SYMBOLS

* -COMPONENTS SELECTED IN TEST

□ -TB FINGER

○ -CONTACT PIN

[- -] -COMPONENTS SHOWN DOTTED WILL BE FURNISHED ONLY WHEN REQUIRED. C52 AND R257 WILL PROVIDE A TACHOMETER RATE NETWORK, AND C70 AND R381 WILL CONTROL THE RATE OF RISE OF CURRENT. REFER TO THE SYSTEM ELEMENTARY FOR FURTHER INFORMATION.

THE NOMENCLATURE IS DEFINED IN THE ENGINEERING SPECIFICATION AND THE INSTRUCTION BOOK.

EXCEPT AS NOTED ALL NPN TRANSISTORS ARE 2N4424 AND ALL PNP TRANSISTORS ARE 2N5366.

NOTE

1. 332Ω RESISTOR LTR FROM LT1 TO COM FOR 2-60 SEC. LINEAR TIMING RANGE.

REVISIONS

No revisions are to be made to this drawing without the specific approval of the Development Engineering Section of the Speed Variator Department.

5B(8)W
5R(2)BW
5U(7)BW
AW(8W)
5D(CO)
JA(CO)

MADE BY D. Lamick FEB. 24, 1981

D Lamick MAR 6, 1981

APPROVALS

SPEED VARIATOR

ERIE, PA

36D870012AA

CONT ON SHEET FL SH NO 2

ZONE	LTR	REV	DESCRIPTION	DATE	APPROVED

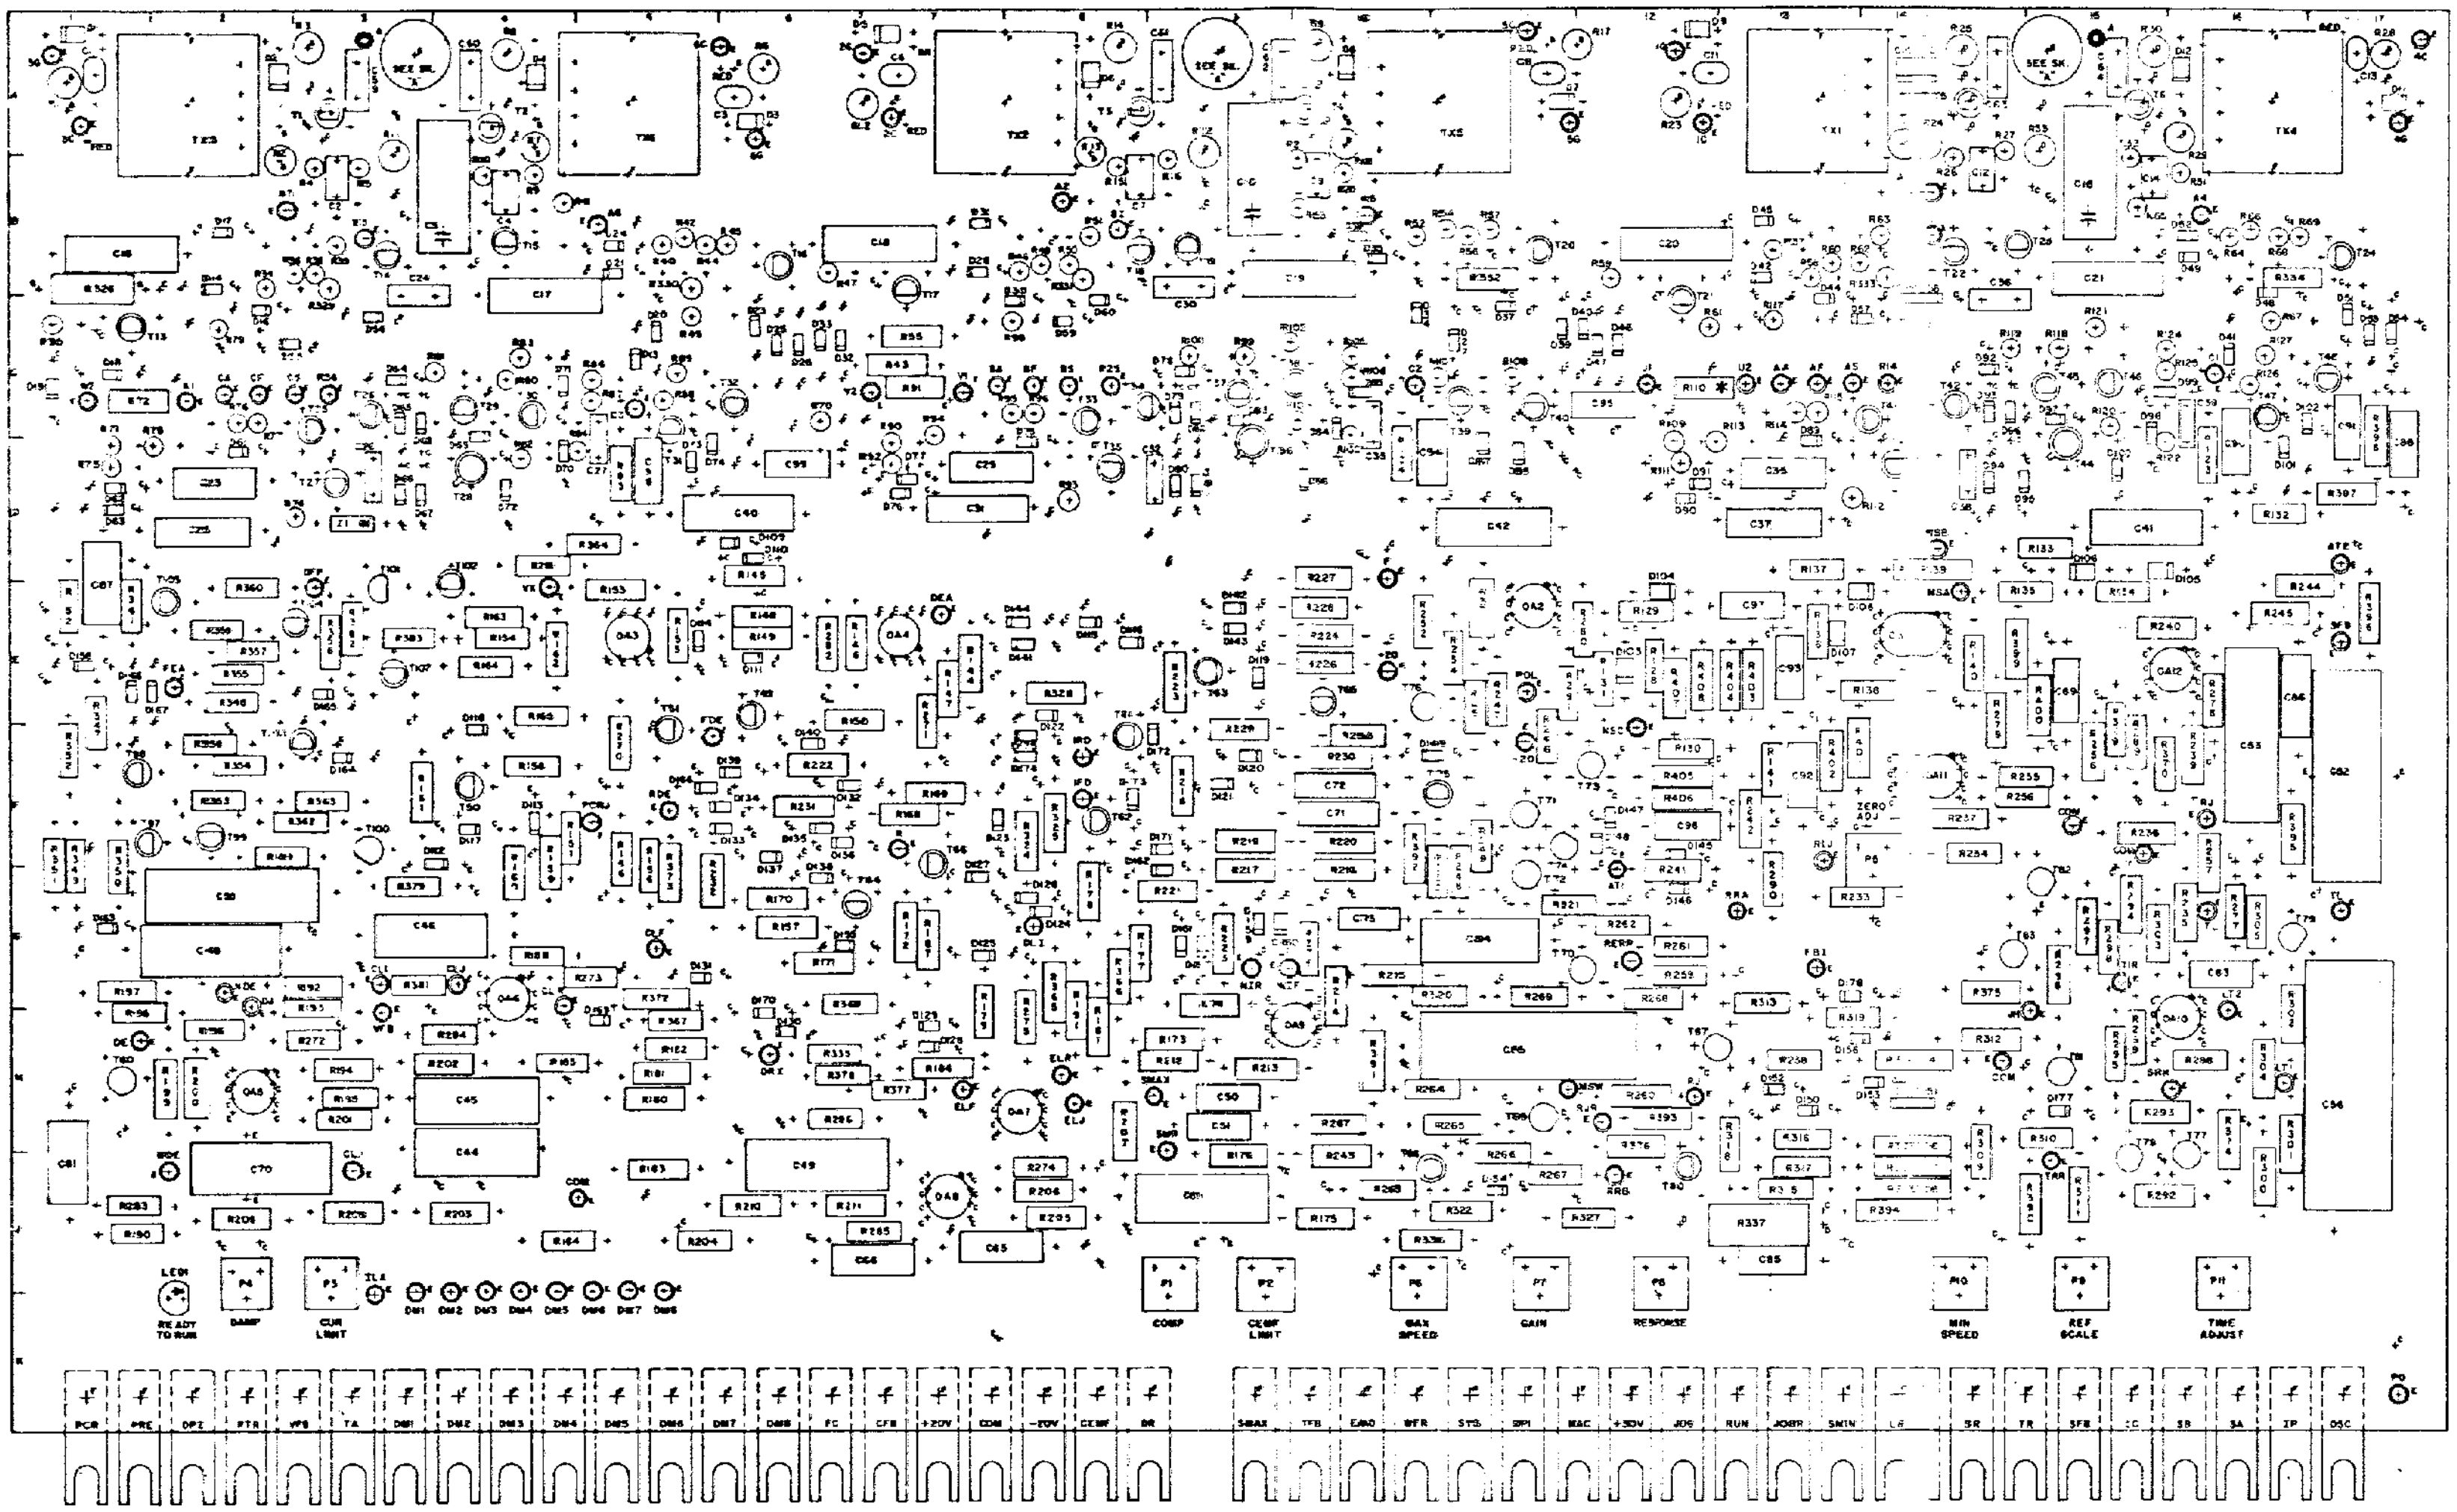

HOLE TABULATION

ALL HOLES .046 DIA. EXCEPT
THE HOLES TABULATED BELOW

LOC	DIA.	QUAN.
A	.187	8
B	.062	26
C	.032	595
D	.062	56
E	.070	118
F	.128	54
G	.187	3

1. CARD SIZE, 10.000 X 17.000

TRANSISTOR LEAD SKETCHES

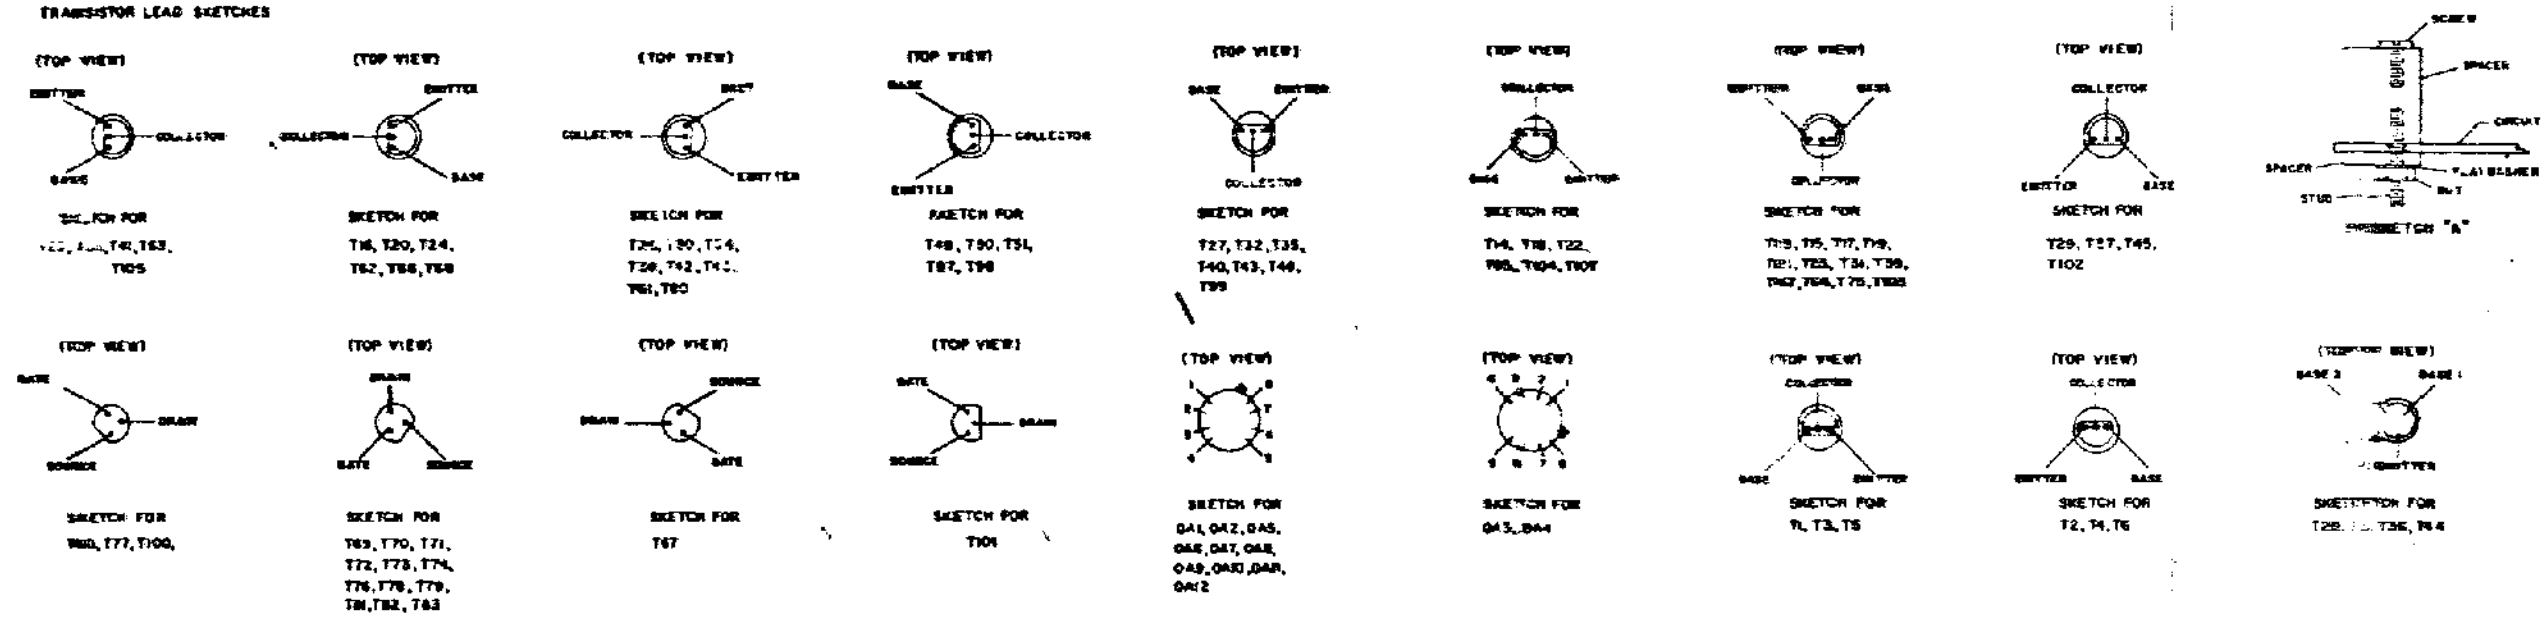

COMPONENT HEIGHT SKETCH



2X	36C774068AC005	36C774069AC005		
SCALE	REAR ETCHED BOARD DWG.	FRONT ETCHED BOARD DWG.	FRONT	BACK
			SPACE UNIT REQUIREMENT	

PRINTS TO

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES—
TOLERANCES ON:
2-PLACE DECIMALS ±
3-PLACE DECIMALS ±
ANGLES ±
FRACTIONS ±
ALL SURF. ✓
MATERIAL—

SIGNATURES

GENERAL ELECTRIC
Speed Variator DEPT. LOC. ERIE, PENNA., U.S.A.

CONTROL CARD

COMPONENT DIAGRAM

SIZE E
CODE IDENT NO.
36C764416AA
SCALE