

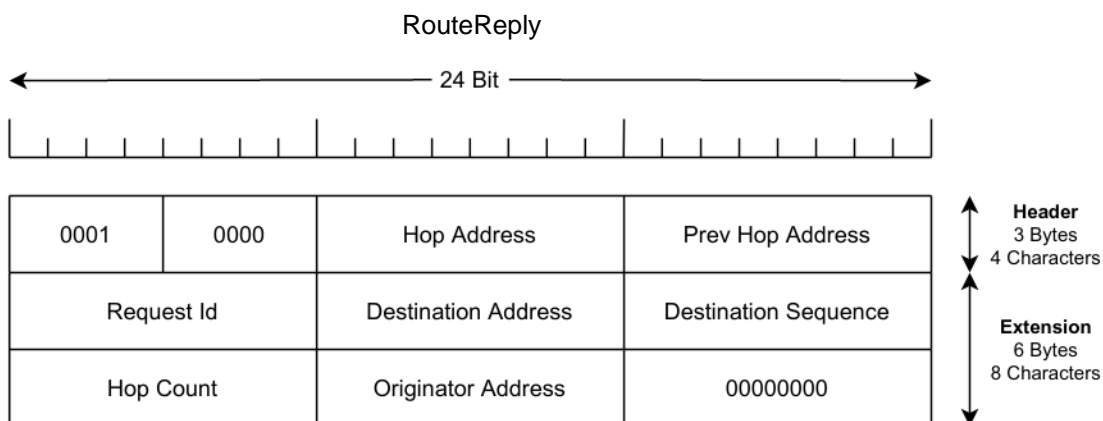



* **Hop Address** 0xFF is reserved as a broadcast address

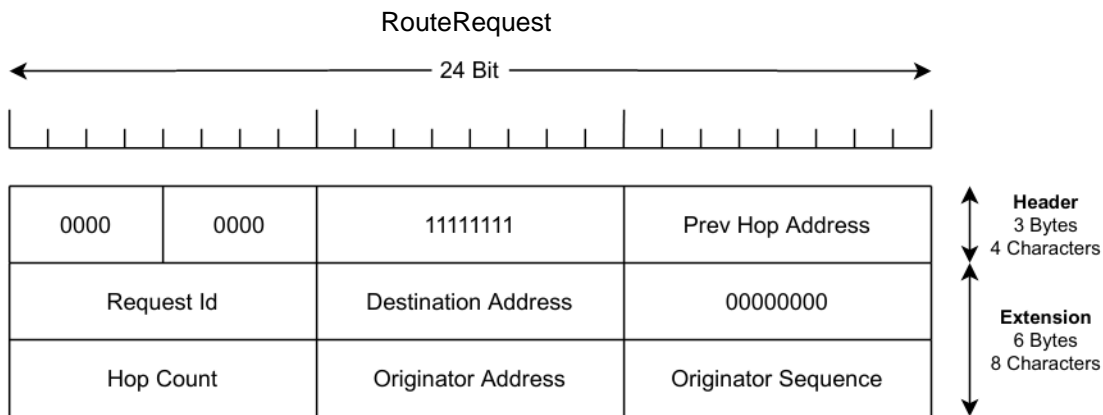

* **Request Id** must contain the same **Request Id** that was received from the corresponding **RREQ** Packet

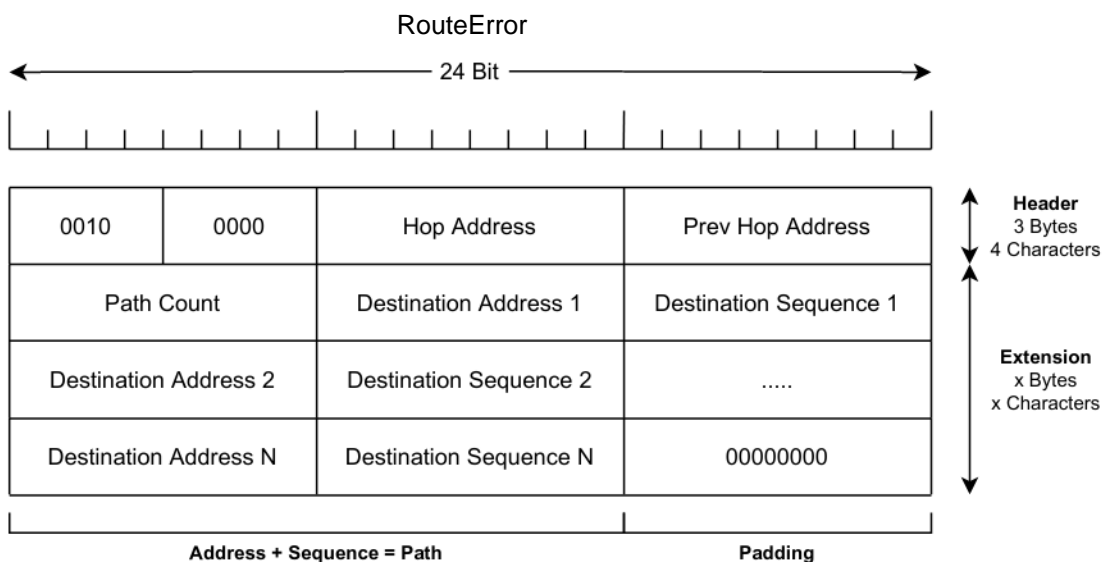

* Repeat **Path** elements **Path Count** times and fill the resulting gap to the 24 bit boundary with zeros

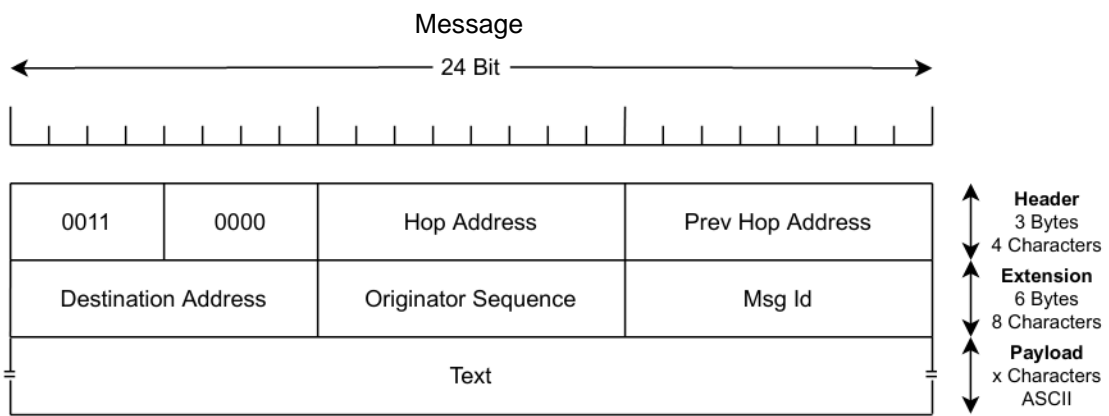

* **Text** field contains the text in ascii and is not constrained by the 24 bit boundary unlike the other fields that are encoded via Base64

