


MIU-B06W-2

6,000 BTU Indoor Wall Mount Unit

Job Name:

Reference:

Date:

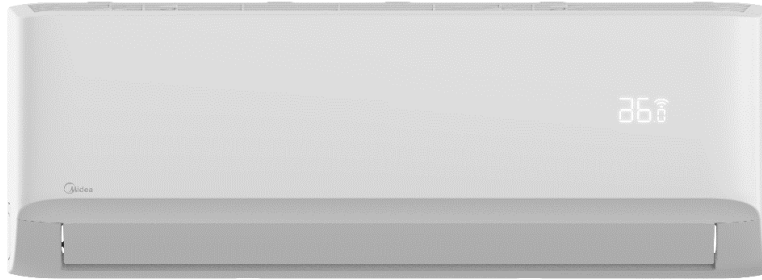


Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	6000
Heating Capacity	Btu/hr	7000
Design Pressure	PSI	550 / 340
Refrigerant Type	-	R454B
Liquid Side	inch(mm)	1/4in (6.35mm)
Gas Side	inch(mm)	3/8in (9.52mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)


Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	14x4
MCA	A	3
Indoor Fan Motor Model	-	ZKFP-13-8-4-17
Indoor Fan Motor Output	W	13
Indoor Fan Motor RLA	A	0.4
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1100 / 810 / 690

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	294.3 / 235.4 / 176.6 / 141.3 / 141.3
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	42 / 37 / 32 / 24 / 20
Dimension (W×D×H)	inch	28-3/4 × 7-7/8 × 11-1/2
	mm	(729 × 200 × 292)
Package (W×D×H)	inch	31-1/8 × 10-11/16 × 14-13/16
	mm	(790 × 270 × 375)
Net Weight / Gross Weight	lbs	63 / 68
	kg	(29 / 31)

Indoor Unit Dimension

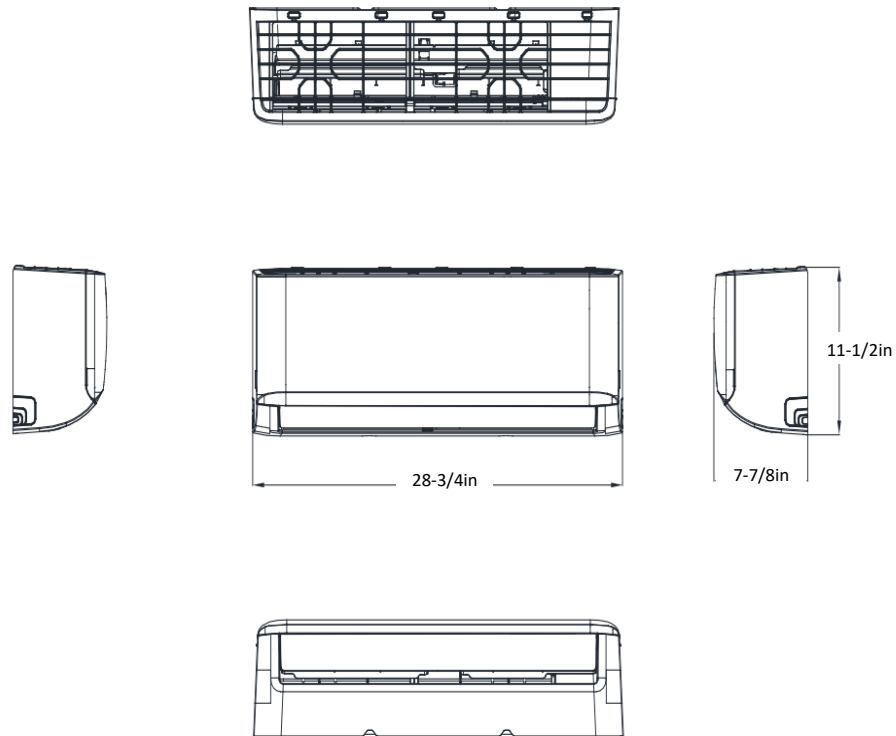

Indoor Unit Dimensions (Blow Up)

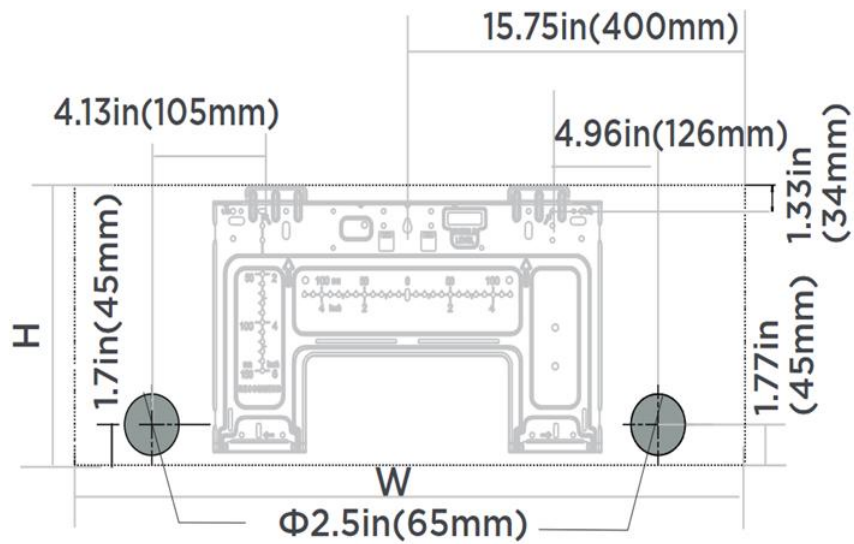

Indoor unit dimensions(WxH):
 28.7 in(729 mm)x 11.5 in(293 mm)