


MIU-B12W-2

6,000 BTU Indoor Wall Mount Unit

Job Name:

Reference:

Date:

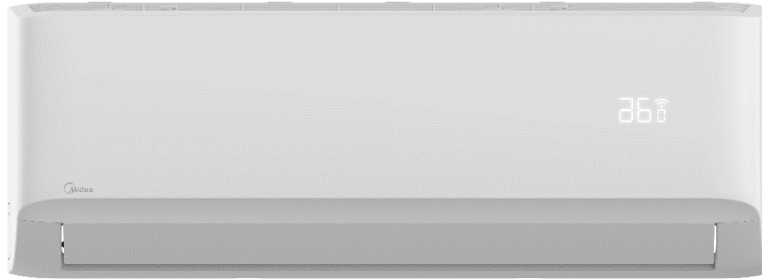


Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	12000
Heating Capacity	Btu/hr	12000
Design Pressure	PSI	550 / 340
Refrigerant Type	-	R454B
Liquid Side	inch(mm)	1/4in (6.35mm)
Gas Side	inch(mm)	3/8in (9.52mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)


Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	14x4
MCA	A	3
Indoor Fan Motor Model	-	ZKFP-13-8-4
Indoor Fan Motor Output	W	13
Indoor Fan Motor RLA	A	0.5
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1150 / 990 / 750

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	382.6 / 294.3 / 194.2 / 153.0 / 153.0
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	42 / 42 / 35.5 / 22.5 / 20
Dimension (W×D×H)	inch	31-5/8 × 7-7/8 × 11-5/8
	mm	(802 × 200 × 295)
Package (W×D×H)	inch	34-1/2 × 11-1/4 × 15
	mm	(875 × 285 × 380)
Net Weight / Gross Weight	lbs	73 / 79
	kg	(33 / 36)

Indoor Unit Dimension

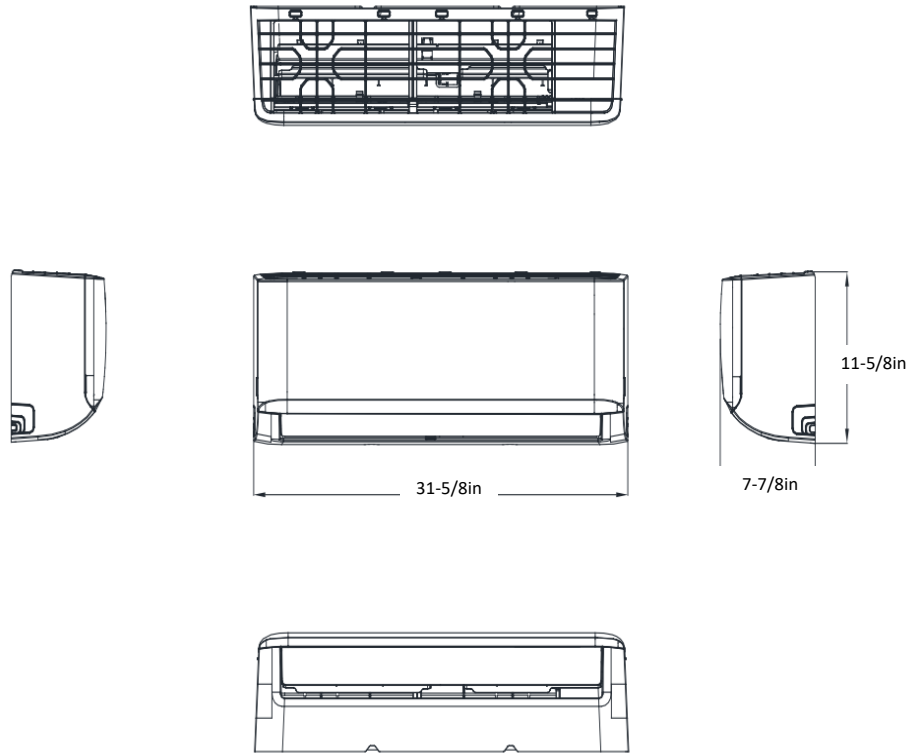

Indoor Unit Dimensions (Blow Up)

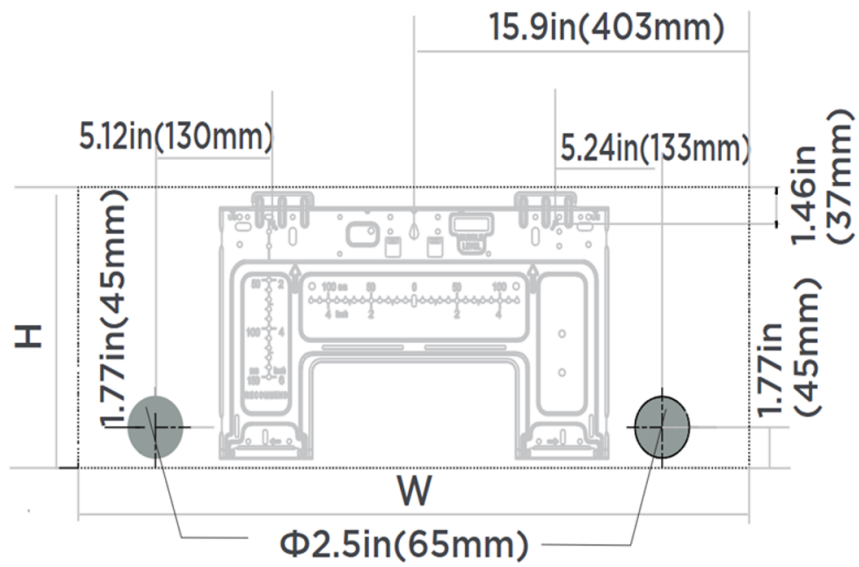

Indoor unit dimensions(WxH):
 $31.7\text{in}(806\text{mm})\times 11.65\text{in}(296\text{mm})$