


MIU-B18W-2

6,000 BTU Indoor Wall Mount Unit

Job Name:

Reference:

Date:

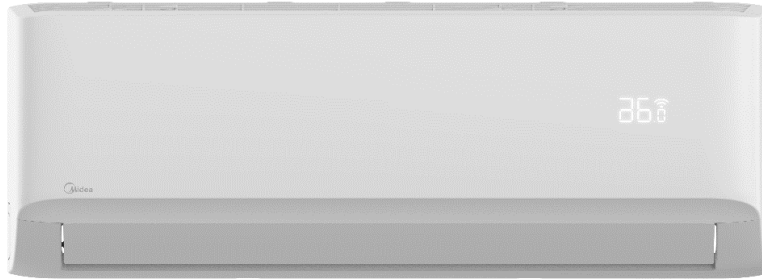


Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	18000
Heating Capacity	Btu/hr	18000
Design Pressure	PSI	550 / 340
Refrigerant Type	-	R454B
Liquid Side	inch(mm)	1/4in (6.35mm)
Gas Side	inch(mm)	1/2in (12.7mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)


Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	14x4
MCA	A	3
Indoor Fan Motor Model	-	ZKFP-58-8-1-10
Indoor Fan Motor Output	W	58
Indoor Fan Motor RLA	A	0.8
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1070 / 922 / 848

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	759.3 / 500.3 / 441.4 / 370.8 / 370.8
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	54.5 / 45 / 40 / 24.5 / 20
Dimension (W×D×H)	inch	42-5/8 × 9-1/4 × 13-5/16
	mm	(1082 × 234 × 337)
Package (W×D×H)	inch	45-1/2 × 12-7/16 × 16-3/8
	mm	(1155 × 315 × 415)
Net Weight / Gross Weight	lbs	100 / 108
	kg	(46 / 49)

Indoor Unit Dimension

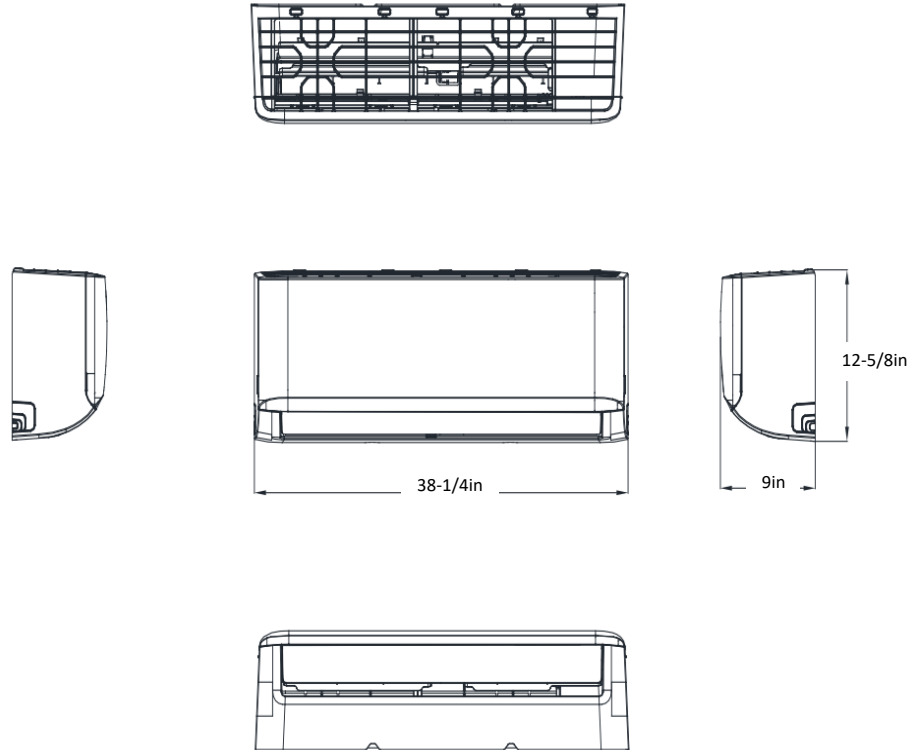

Indoor Unit Dimensions (Blow Up)

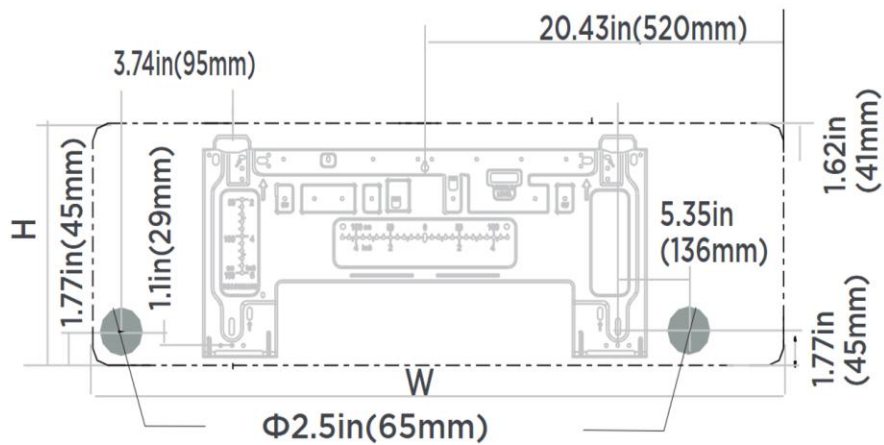

Indoor unit dimensions(WxH):
 38.2in(971mm)x12.6in(321mm)