


MIU-B24W-2

6,000 BTU Indoor Wall Mount Unit

Job Name:

Reference:

Date:

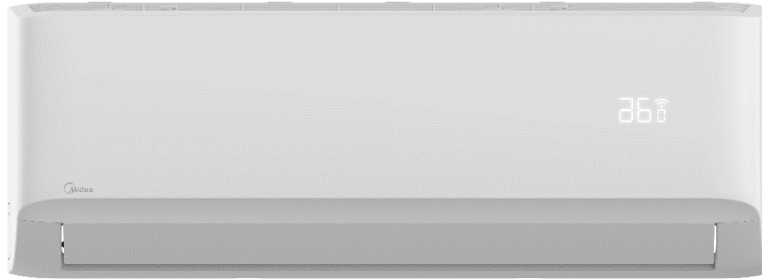


Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	23000
Heating Capacity	Btu/hr	26000
Design Pressure	PSI	550 / 340
Refrigerant Type	-	R454B
Liquid Side	inch(mm)	3/8in (9.52mm)
Gas Side	inch(mm)	5/8in (15.9mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)


Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	14x4
MCA	A	3
Indoor Fan Motor Model	-	ZKFP-58-8-1-10
Indoor Fan Motor Output	W	58
Indoor Fan Motor RLA	A	1.3
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1200 / 1080 / 600

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	759.3 / 588.6 / 459.1 / 382.6 / 382.6
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	54.5 / 49.5 / 43.5 / 34.5 / 20.5
Dimension (W×D×H)	inch	42-5/8 × 9-1/4 × 13-5/16
	mm	(1082 × 234 × 337)
Package (W×D×H)	inch	45-1/2 × 12-7/16 × 16-3/8
	mm	(1155 × 315 × 415)
Net Weight / Gross Weight	lbs	131 / 142
	kg	(60 / 65)

Indoor Unit Dimension

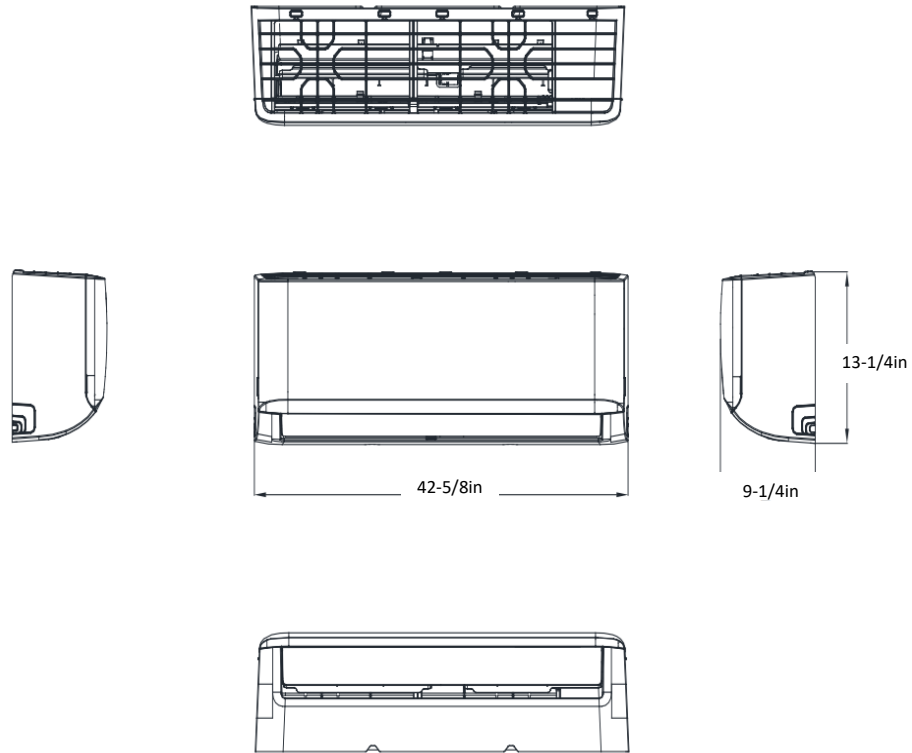

Indoor Unit Dimensions (Blow Up)

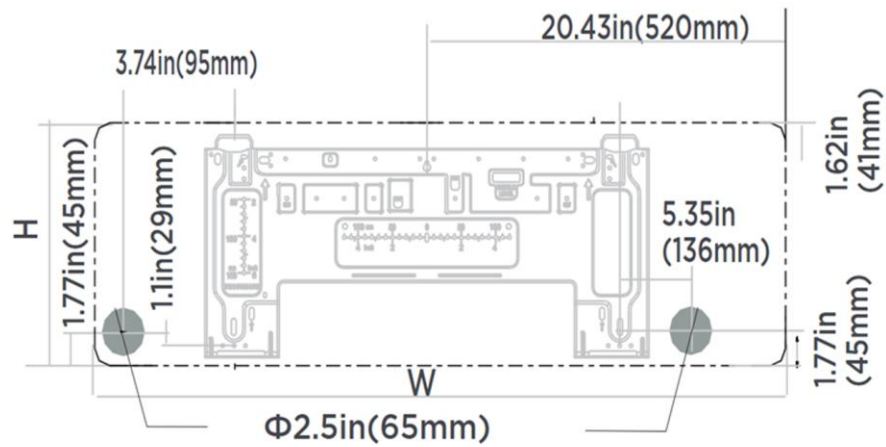

Indoor unit dimensions(WxH):
 $38.2\text{in}(971\text{mm}) \times 12.6\text{in}(321\text{mm})$