

MOU-B24H-2/MIU-B24W-2

24,000 BTU Wall Mount Indoor Unit/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		759.3 / 588.6 / 459.1 / 382.6 / 382.6
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54.5 / 49.5 / 43.5 / 34.5 / 20.5
Dimension (W×D×H)	inch	42-5/8 × 9-1/4 × 13-5/16
	mm	(1082 × 234 × 337)
Package (W×D×H)	inch	45-1/2 × 12-7/16 × 16-3/8
	mm	(1155 × 315 × 415)
Net/Gross Weight	lbs	31 / 41
	kg	(14 / 19)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2235.3
Outdoor Noise Level (dBA)		61
Dimension (W×D×H)	inch	37-1/4 × 16-3/16 × 31-15/16
	mm	(946 × 410 × 810)
Package (W×D×H)	inch	42-15/16 × 19-11/16 × 34-7/8
	mm	(1090 × 500 × 885)
Net/Gross Weight	lbs	131 / 142
	kg	(60 / 65)

EFFICIENCY

Cooling		Heating	
SEER2	22.3	HSPF2-4	13.3
EER2	12.5	COP	3.05

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	23000
Min/Max Capacity	16800~24500
Moisture Removal(L/h)	2.6
Standard Operating Range(°F/°C)	-22~122(-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	26000
1. @ 47°F Min/Max Capacity	11800~28100
2. @ 17°F Rated	21600
3. @ 5°F Rated: Capacity / COP	24000/2.00
3. @ 5°F Max: Capacity	24000
Standard Operating Range(°F/°C)	-22~75(-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	24.9
Connection Wiring	14x4
System MOC	25
Compressor RLA	15
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.3
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	1840 (1490 ~ 2210)
System Power Input @ Heating (W)	2498 (675 ~ 2600)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	5/8in (15.9mm)
Max. Piping Length(ft/m)	164.00 (50)
Max. Height Difference(ft/m)	82.00 (25)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	63.49 (1.8)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.32 (30)
Connection Method	Flared

Indoor Unit Dimension

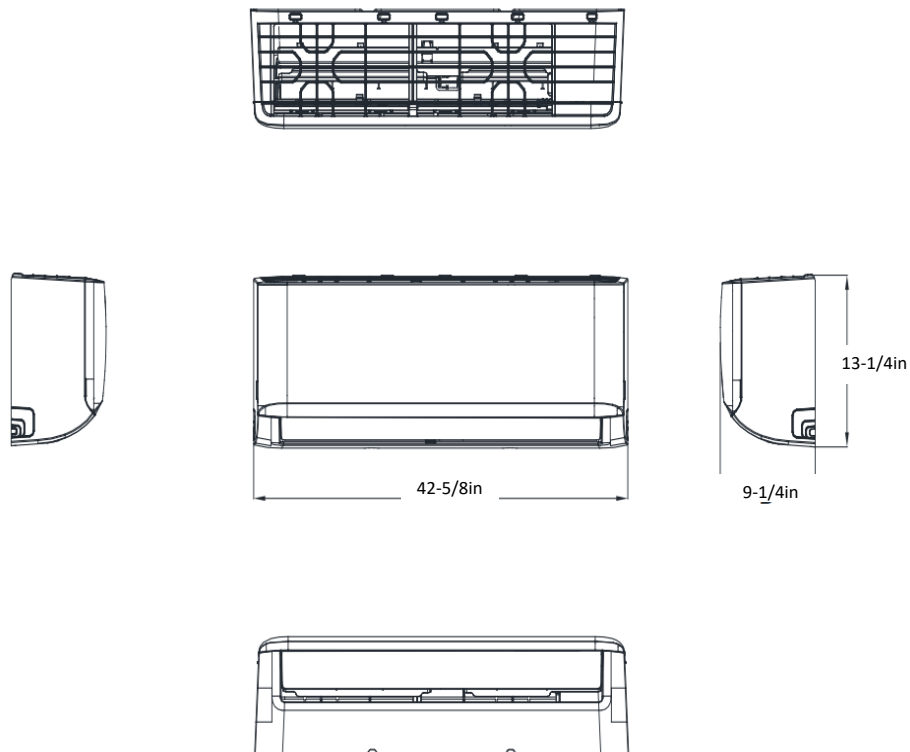


Indoor Unit Dimensions (Blow Up)

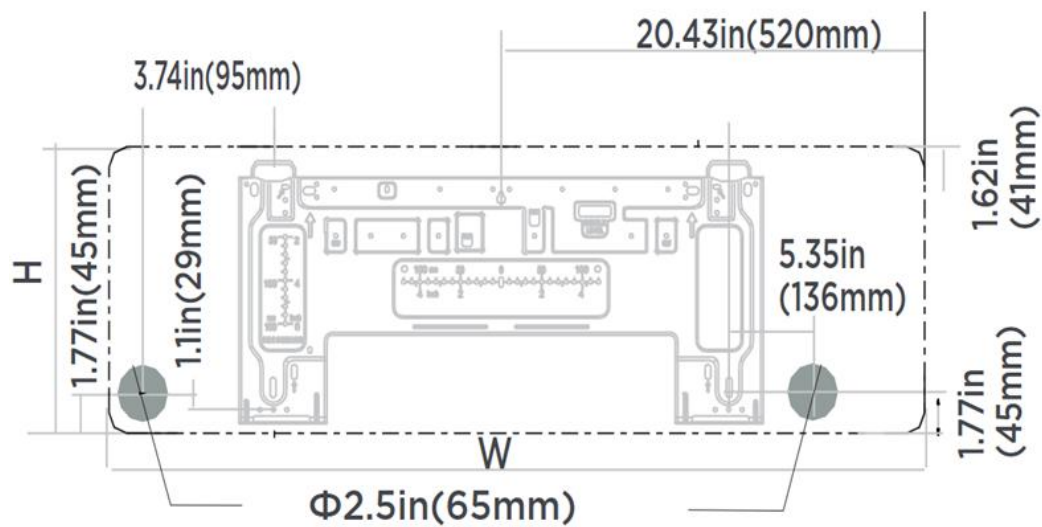

Indoor unit dimensions(WxH):
 $38.2\text{in}(971\text{mm})\times 12.6\text{in}(321\text{mm})$

Outdoor Unit Dimension

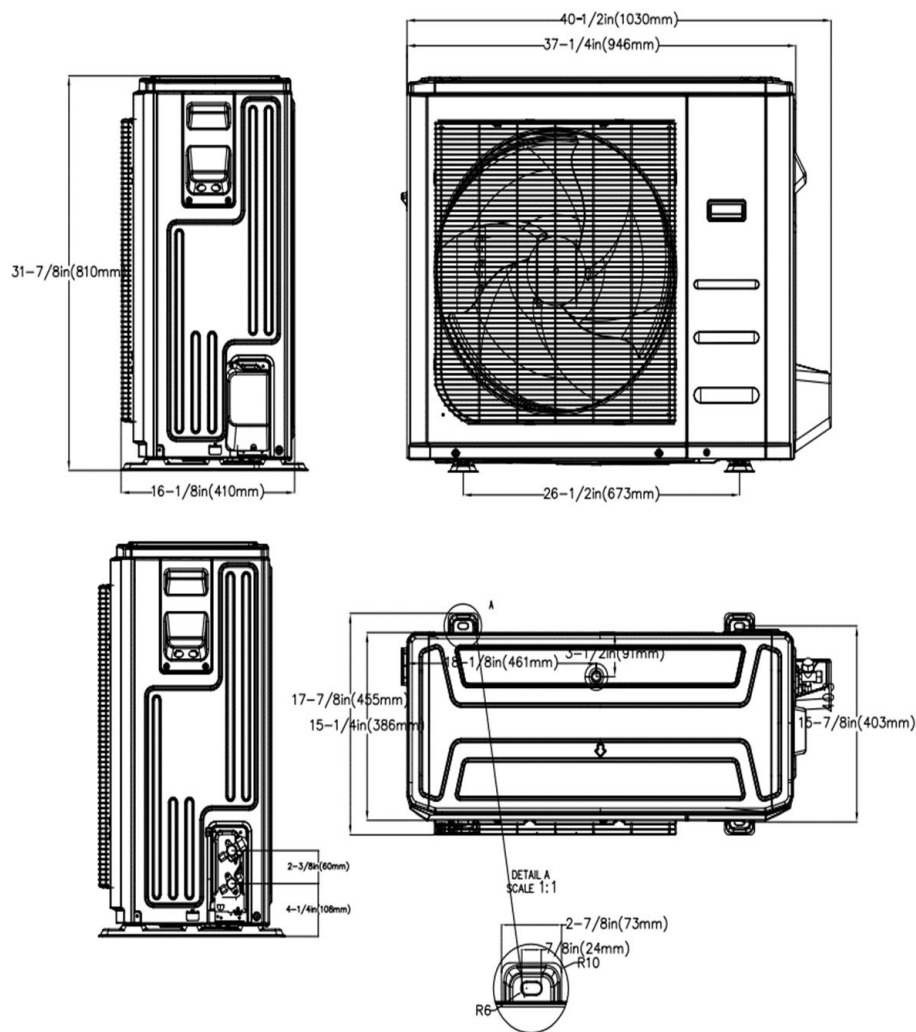

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.