

MAC-B4821

48,000 BTU A Coil Indoor Unit

Job Name:

Reference:

Date:




Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	47000
Heating Capacity	Btu/hr	47000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	3/8" (9.52mm)
Gas Side	inch(mm)	3/4" (19mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	24V, 1Ph, 60Hz
Connection Wiring	-	AWG 20/2

Air Flow & Noise Level		
Dimension (W×D×H)	inch	21-5/8 x 21-1/2 x 27-3/4
	mm	(549 x 546 x 706)
Package (W×D×H)	inch	31-1/8 x 25 x 25-5/8
	mm	(790 x 635 x 650)
Net Weight / Gross Weight	lbs	97 / 115
	kg	43.9 / 52.2

Indoor Unit Dimensions

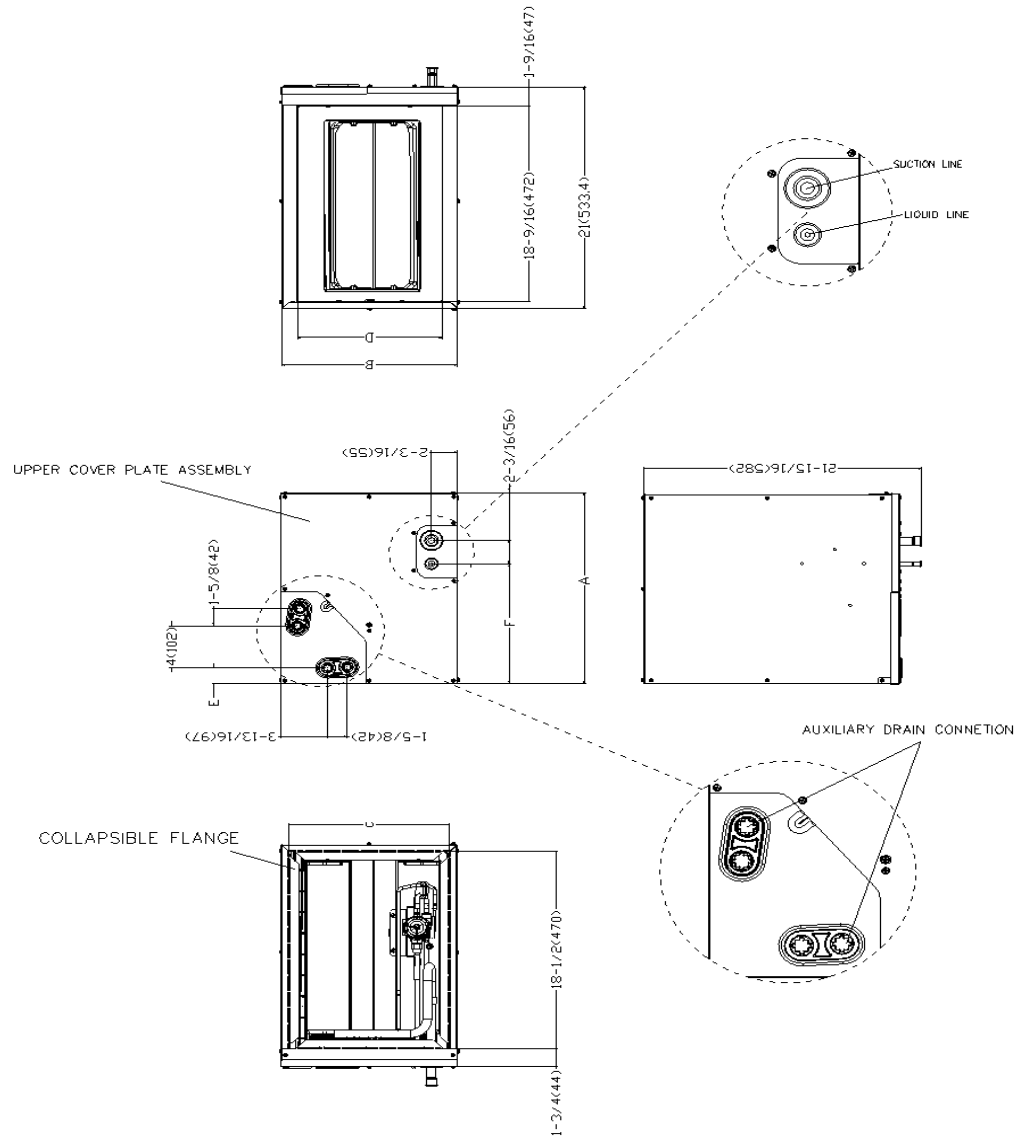

Model(Btu/h)		24-A		36-A		36-B	
		inch	mm	inch	mm	inch	mm
A	Model Height	18	457	23-5/16	592	23-1/2	599
B	Model Width	14-1/2	368	14-1/2	368	17-1/2	445
C	Supply Air Opening Width	13-1/4	336	13-1/4	336	16-3/16	411
D	Return Air Opening Width	11-15/16	303	11-15/16	303	14-15/16	380
E	Condensate Drains Height	1-7/16	38	1-7/16	38	1-7/16	38
F	Liquid Line Height	11-3/8	290	17-15/16	455	16-3/8	417
Model(Btu/h)		24-B		36-C			
		inch	mm	inch	mm		
A	Model Height	18	457	24	611		
B	Model Width	17-1/2	445	21	534		
C	Supply Air Opening Width	16-3/16	411	19-3/4	502		
D	Return Air Opening Width	14-15/16	380	18-7/16	468		
E	Condensate Drains Height	1-7/16	38	2-3/16	55		
F	Liquid Line Height	11-3/8	290	17-1/2	445		