

MOU-B18V-4&MIU-B18V-4

18,000 BTU Multi-Positional Air Handler/Heat Pump Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	618.03 / 576.83 / 529.74 / 488.54 / 488.54
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	44 / 43 / 41 / 33 / 33
Dimension (W×D×H)	inch: 17-9/16 × 21-1/16 × 45 mm: (445 × 534 × 1143)
Package (W×D×H)	inch: 26-5/8 × 20-7/8 × 48-5/8 mm: (675 × 530 × 1235)
Net/Gross Weight	lbs (kgs): 106 / 127 (48 / 58)

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KSN140D58UFZ
Refrigerant	R454B
Refrigerant Oil Charge(mL)	440
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1450.9
Outdoor Noise Level (dBA)	55
Dimension (W×D×H)	inch: 31-3/4 × 13 × 21-13/16 mm: (805 × 330 × 554)
Package (W×D×H)	inch: 36-1/16 × 14-5/8 × 24-1/4 mm: (915 × 370 × 615)
Net/Gross Weight	lbs (kgs): 78 / 84 (35 / 38)

EFFICIENCY

Cooling	Heating
SEER2	HSPF2-4
EER2	COP
18.8	9.1
11.0	3.15

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	5350~20000
Moisture Removal(L/h)	1.71
Standard Operating Range(*F/*C)	-13~122(-25 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	18000
1. @ 47°F Min/Max Capacity	5600~19000
2. @ 17°F Rated	12600
3. @ 5°F Rated: Capacity / COP	11200/2
3. @ 5°F Max: Capacity	11200
Standard Operating Range(*F/*C)	-13~75(-25 ~ 24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL


Indoor Power Supply	115 / 208 / 230V, 60Hz, 1Ph
Indoor MCA 115V/(208/230V)	5.5 / 4.0
Indoor MOP	15
Outdoor Power Supply	208 / 230V, 60Hz, 1Ph
Outdoor MCA	16
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	10
Outdoor Fan Motor RLA	0.8
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	2
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	1635 (400 ~ 1900)
System Power Input @ Heating (W)	1675 (340 ~ 1650)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	98.4 (30)
Max. Height Difference(ft/m)	65.6 (20)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	51.15 (1.45)
Additional Charge of Refrigerant(oz/ft)/(g/m)	0.7 (65)
Connection Method	Flared*


*The gas valve of the outdoor unit is 5/8", 5/8" to 3/4" flare to flare connector is required for the installation.

Indoor Unit Dimension

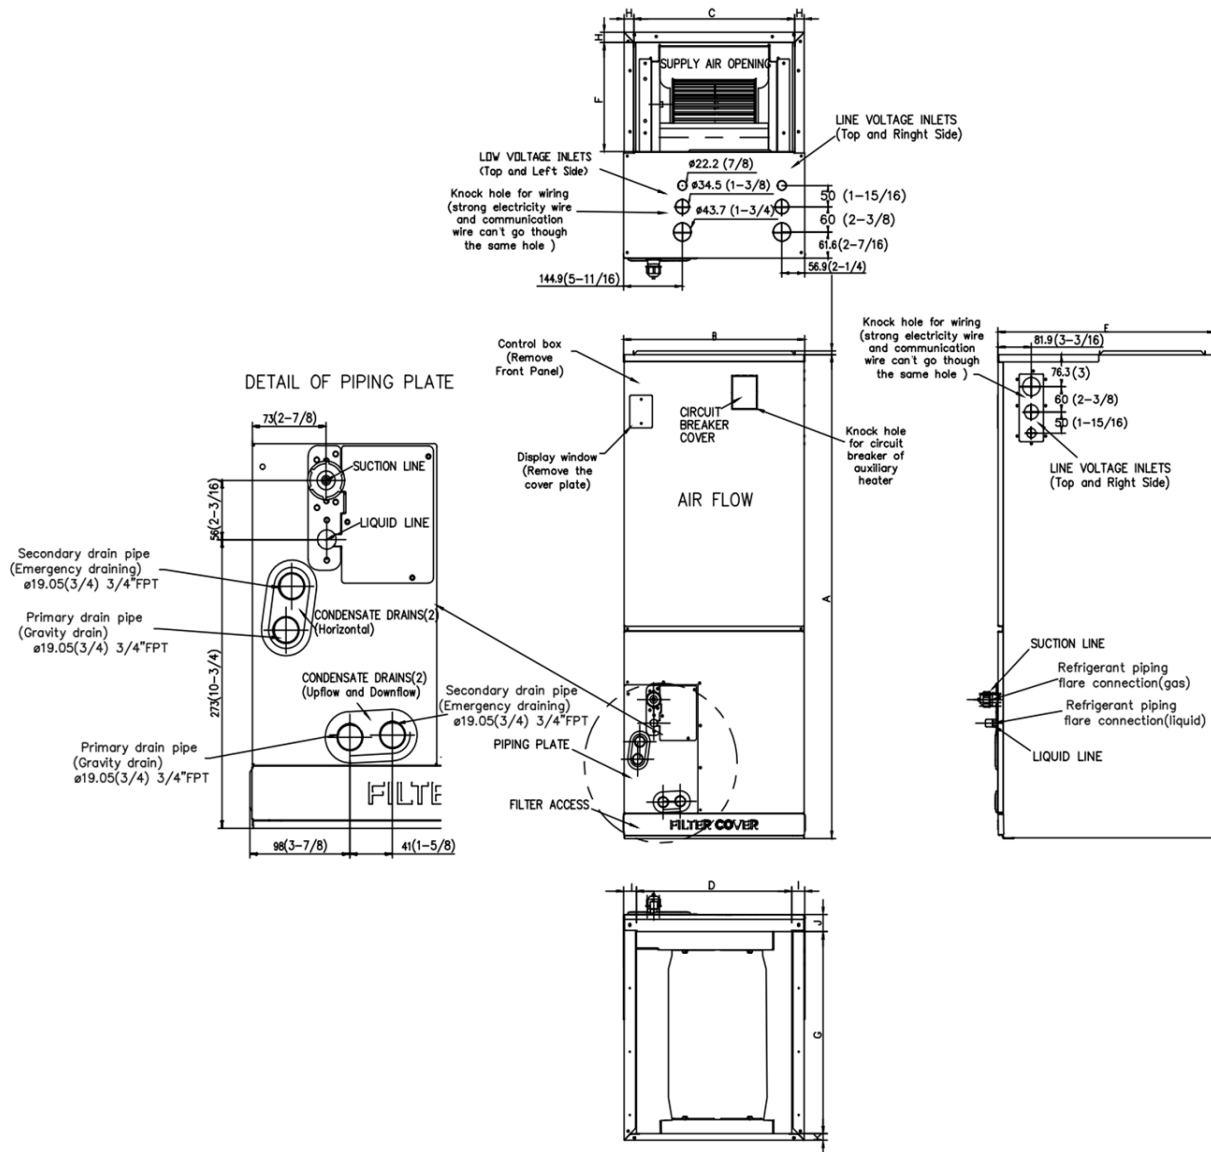



Dimensions		18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Outdoor Unit Dimension

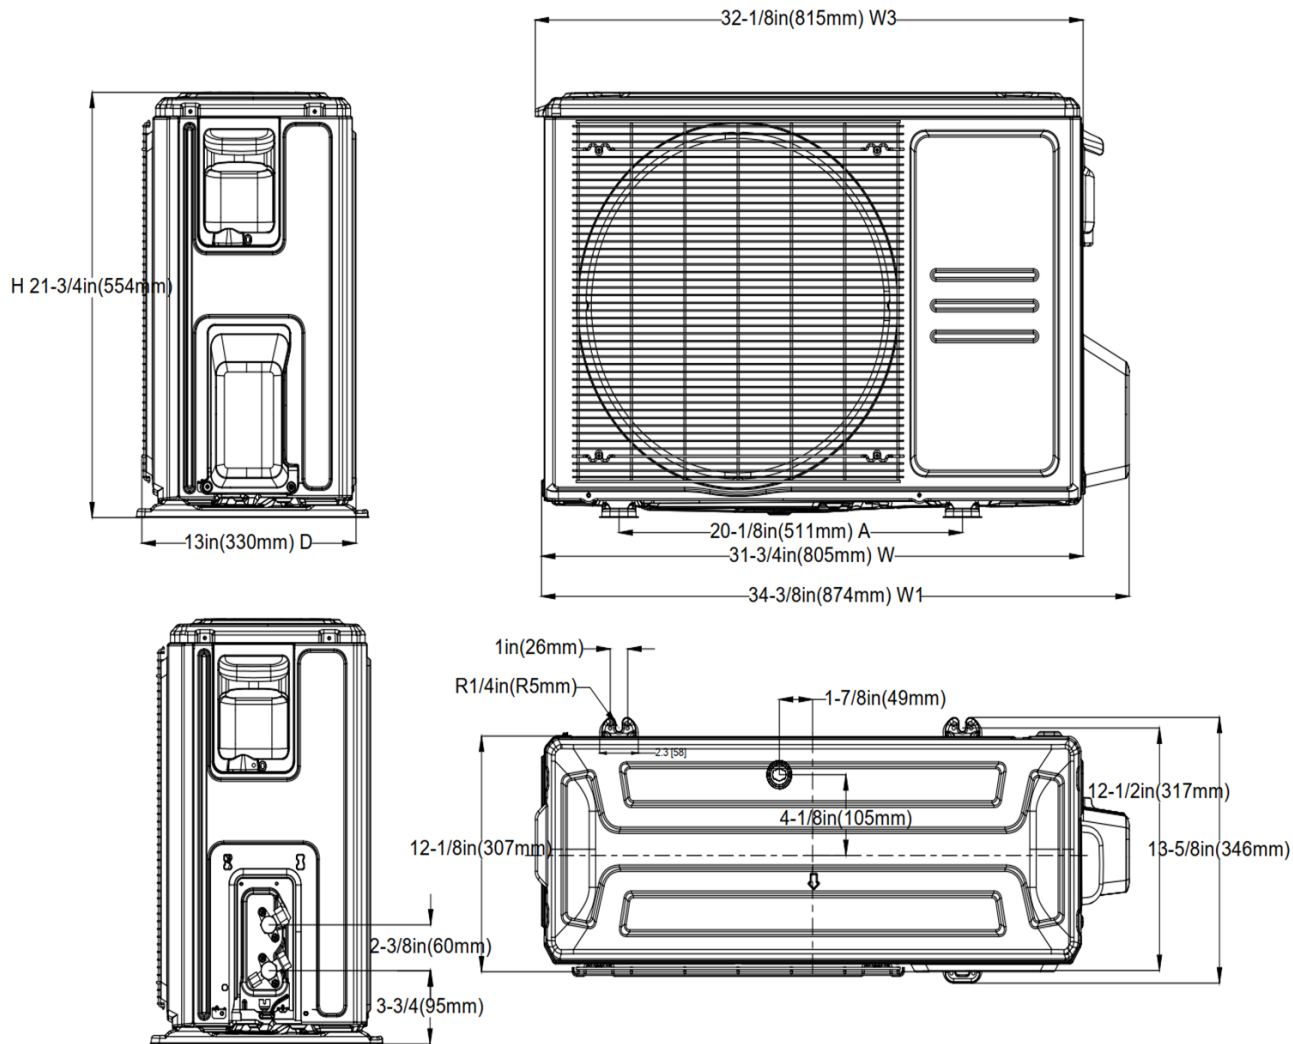

Indoor Unit Fan Performance

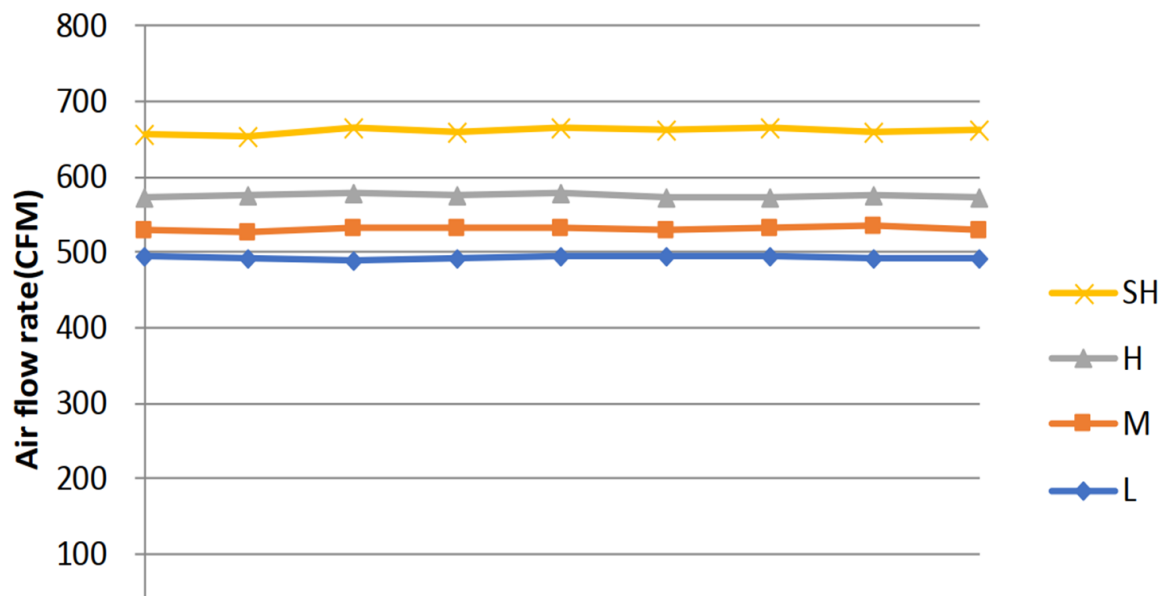

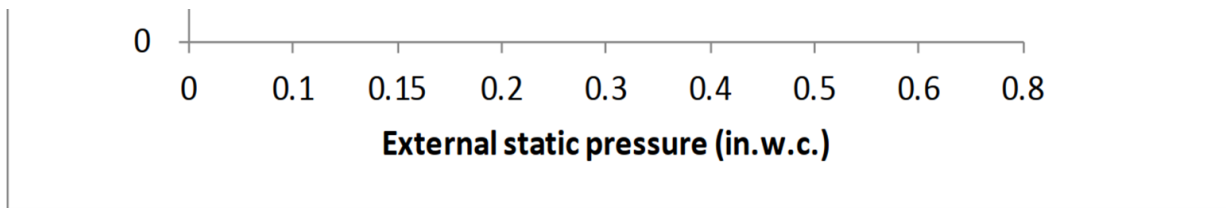

General Features

GENERAL FEATURES

- Multi-positional installation: horizontal (left or right), vertical (up or down)
- Aluminum Coil
- Constantly Air Flow system up to 0.80 in. W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency (optional)
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Adaptive Control System
- High efficiency up to 18.8 SEER2, 11 EER2, 9.7HSPF2
- Chassis heater and crankcase heater equipped as standard

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Wireless remote controller
- Third-Party 24V Thermostat

* For 36K model, rated cooling capacity/heating capacity at -4F=100%