

MOU-B36G-2/MIU-B36W-2

36,000 BTU Wall-Mount Indoor/Heat Pump Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		871.1 / 676.9 / 447.3 / 329.6 / 329.6
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		57.0 / 51.0 / 45.0 / 33.5 / 27.5
Dimension (W×D×H)	inch	49-9/16 × 11-3/16 × 14-1/4
	mm	(1259 × 283 × 362)
Package (W×D×H)	inch	52-3/4 × 17-3/4 × 15-3/16
	mm	(1340 × 450 × 385)
Net/Gross Weight	lbs	44 / 57
	kg	(20 / 26)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTF250D22UMT
Refrigerant		R454B
Refrigerant Oil Charge(mL)		670
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2235.3
Outdoor Noise Level (dBA)		63
Dimension (W×D×H)	inch	37-1/4 × 16-3/16 × 31-7/8
	mm	(946 × 410 × 810)
Package (W×D×H)	inch	42-15/16 × 19-11/16 × 34-7/8
	mm	(1090 × 500 × 885)
Net/Gross Weight	lbs	151 / 161
	kg	(69 / 73)

EFFICIENCY

Cooling		Heating	
SEER2	19.5	HSPF2-4	9.1
EER2	9.3	COP	2.95

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	6600~36800
Moisture Removal(L/h)	5.1
Standard Operating Range(*F/*C)	-13~122(-25 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	36000
1. @ 47°F Min/Max Capacity	11400~44000
2. @ 17°F Rated	25600
3. @ 5°F Rated: Capacity / COP	24000/2.02
3. @ 5°F Max: Capacity	24000
Standard Operating Range(*F/*C)	-13~75(-25 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	33
Connection Wiring	14x4
System MOC	35
Compressor RLA	21.5
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	3830 (735 ~ 4400)
System Power Input @ Heating (W)	3580 (1015 ~ 4800)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	5/8in (15.9mm)
Max. Piping Length(ft/m)	213.20 (65)
Max. Height Difference(ft/m)	98.40 (30)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	112.88 (3.2)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.32 (30)
Connection Method	Flared

Indoor Unit Dimension

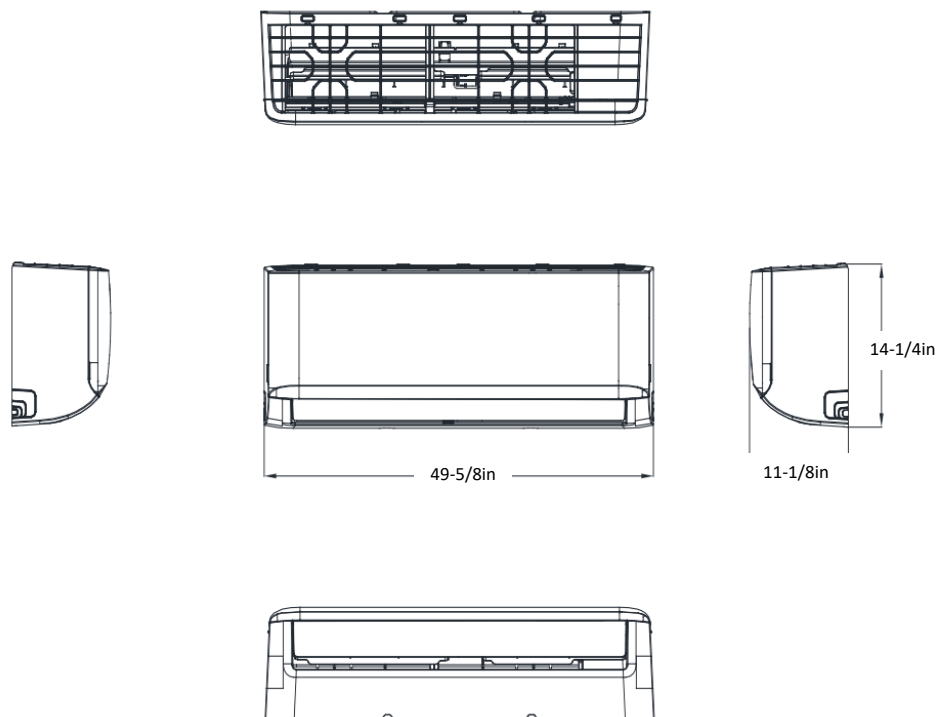


Indoor Unit Dimensions (Blow Up)

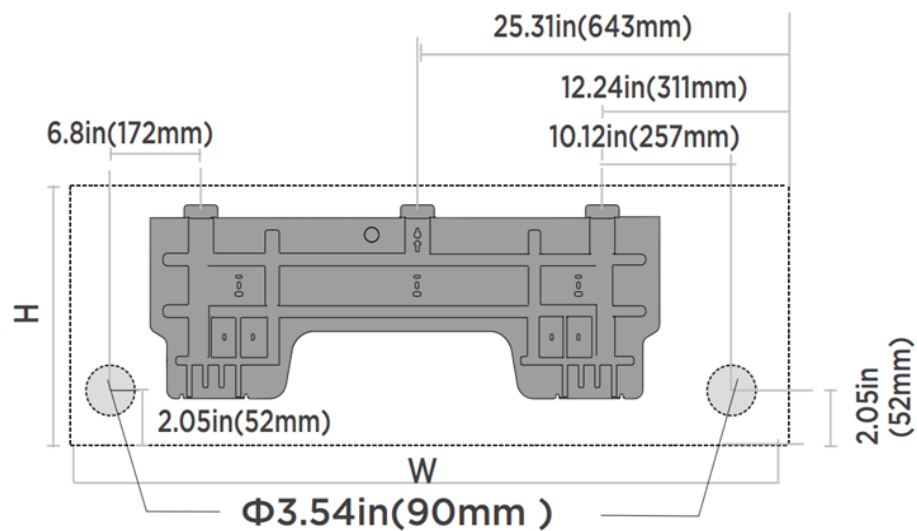

Indoor unit dimensions(WxH):
 $49.57\text{in}(1259\text{mm})\times 14.25\text{in}(362\text{mm})$

Outdoor Unit Dimension

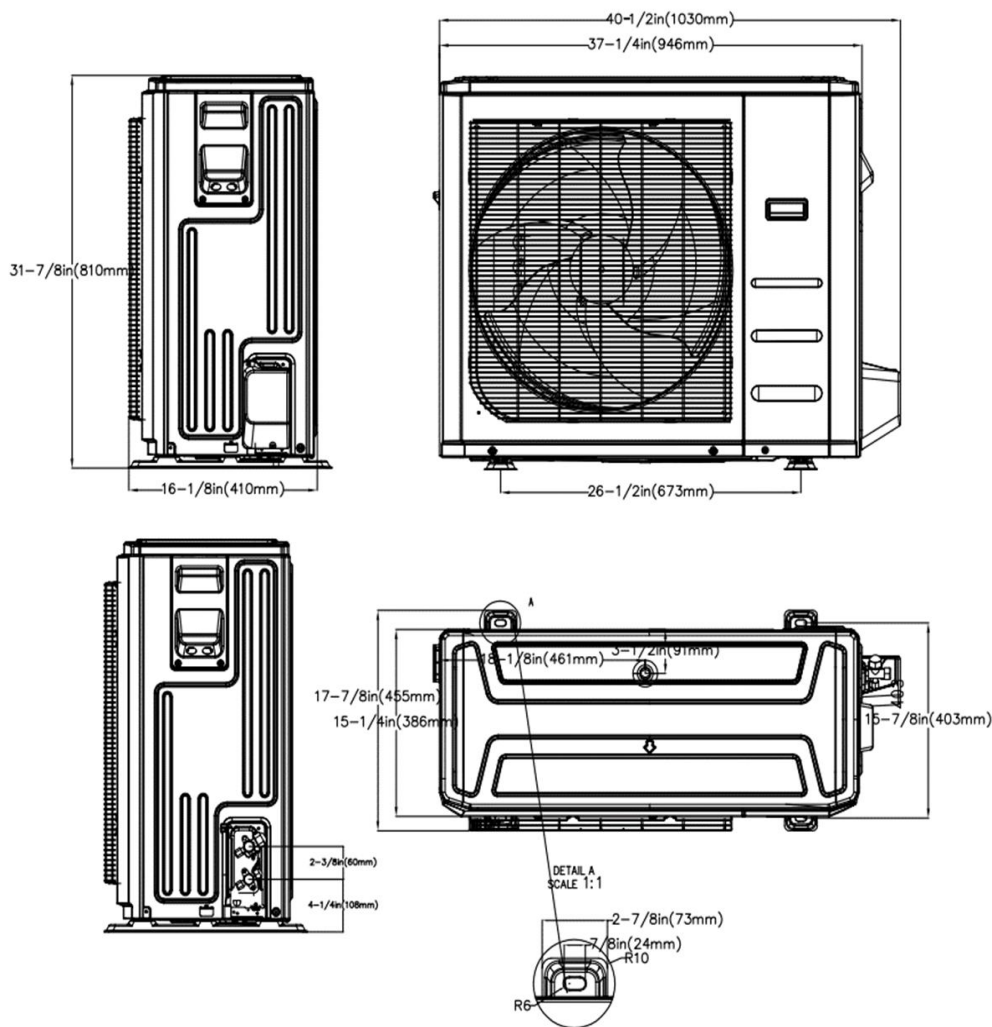

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.