

MIU-B12D-2

12,000 BTU Ducted Indoor Unit

Job Name:

Reference:

Date:




Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	12000
Heating Capacity	Btu/hr	12000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	1/4" (6.35mm)
Gas Side	inch(mm)	3/8" (9.52mm)
Drain Pipe Size	inch(mm)	1" (25mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	3
Indoor Fan Motor Model	-	ZKFN-165-10-1L
Indoor Fan Motor Output	W	165
Indoor Fan Motor RLA	A	1.5
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	780 / 744 / 708

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	344.3 / 288.4 / 230.7 / 200.7 / 121.8
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	N/A/29.5/28.5/27.5/26.0
Dimension (W×D×H)	inch	27-1/2 × 29-1/2 × 9-5/8
	mm	(700 × 750 × 245)
Package (W×D×H)	inch	36-3/8 × 33-1/2 × 11-3/4
	mm	(925 × 850 × 298)
Net Weight / Gross Weight	lbs	64 / 74
	kg	29.1 / 33.5

Indoor Unit Dimensions

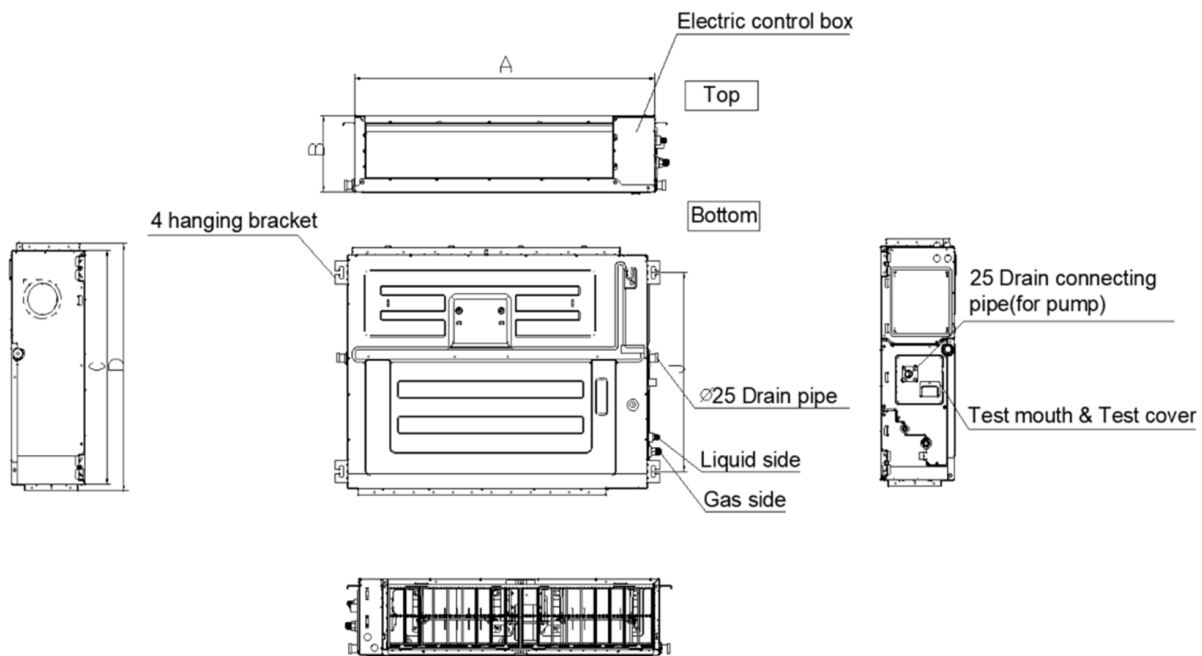

	inch(mm)			
MODEL	A	B	C	D
9~12K	27-1/2(700)	9-5/8(245)	29-1/2(750)	31-1/4(795)
18K~24K	39-3/8(1000)	9-5/8(245)	29-1/2(750)	31-1/4(795)
36K~48K	47-1/8(1200)	11-7/8(300)	29-1/2(750)	31-1/4(795)
60K	55-1/8(1400)	15(380)	31-1/2(800)	33-1/4(845)