

MIU-B24F-2

24,000 BTU Floor Mounted Indoor Unit

Job Name:

Reference:

Date:






Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	24000
Heating Capacity	Btu/hr	24400
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	3/8" (9.52mm)
Gas Side	inch(mm)	5/8" (15.9mm)
Drain Pipe Size	inch(mm)	1" (25mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	2.5
Indoor Fan Motor Model	-	ZKFN-90-8-1
Indoor Fan Motor Output	W	90
Indoor Fan Motor RLA	A	1
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1200 / 1075 / 825

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	736 / 706 / 606 / 453 / 377
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	51 / 49 / 45 / 34 / 29
Dimension (W×D×H)	inch	42 × 26-5/8 × 9-1/4
	mm	(1068 × 675 × 235)
Package (W×D×H)	inch	45-1/8 × 29-3/4 × 12-1/2
	mm	(1145 × 755 × 318)
Net Weight / Gross Weight	lbs	61 / 73
	kg	27.8 / 33.2

Indoor Unit Dimensions

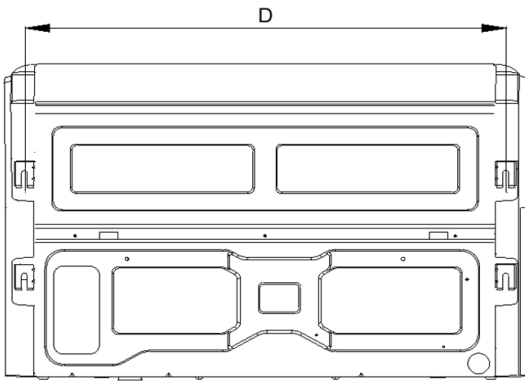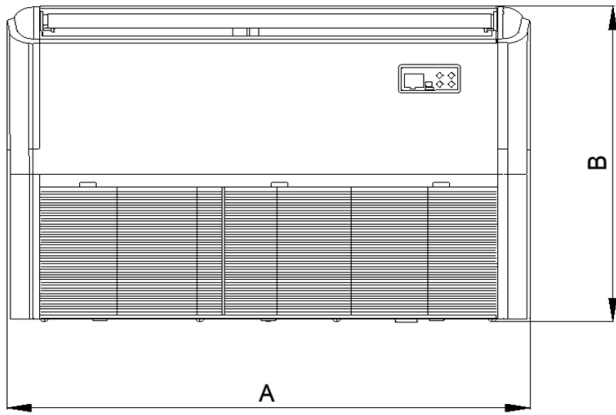

Model	A	B	C	D
18K~24K	42	26-5/8	9-1/4	38-3/4
36K~60K	65	26-5/8	9-1/4	61-5/8