

MOU-B12G-1/MIU-B12W-1

12,000 BTU Wall-Mount Indoor/Heat Pump Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		353.2 / 294.3 / 235.4 / 176.6 / 129.5
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		45 / 41 / 37 / 27.5 / 18.5
Dimension (W×D×H)	inch	31-9/16 × 7-7/8 × 11-5/8
	mm	(802 × 200 × 295)
Package (W×D×H)	inch	34-7/16 × 11-1/4 × 15
	mm	(875 × 285 × 380)
Net/Gross Weight	lbs	20 / 26
	kg	(9 / 12)

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KSN98D64UFZ3
Refrigerant		R454B
Refrigerant Oil Charge(mL)		300
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1235.3
Outdoor Noise Level (dBA)		52.5
Dimension (W×D×H)	inch	30-1/8 × 11-15/16 × 21-7/8
	mm	(765 × 303 × 555)
Package (W×D×H)	inch	34-15/16 × 13-1/4 × 24-1/16
	mm	(887 × 337 × 610)
Net/Gross Weight	lbs	62 / 68
	kg	(28 / 31)

EFFICIENCY			
Cooling		Heating	
SEER2	21.3	HSPF2-4	8.7
EER2	10.0	COP	3.15


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	12000
Min/Max Capacity	3800~12600
Moisture Removal(L/h)	1.3
Standard Operating Range(°F/°C)	5~122(-15 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	12000
1. @ 47°F Min/Max Capacity	2730~12500
2. @ 17°F Rated	7800
3. @ 5°F Rated: Capacity / COP	7000/1.85
3. @ 5°F Max: Capacity	7000
Standard Operating Range(°F/°C)	5~75(-15 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB


ELECTRICAL	
Power Supply	115V,60Hz,1Ph
System MCA	19
Connection Wiring	14x4
System MOCP	20
Compressor RLA	14
Outdoor Fan Motor RLA	0.6
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.6
Indoor Fan Motor W	20
System Power Input @ Cooling (W)	1200 (400 ~ 1280)
System Power Input @ Heating (W)	1116 (320 ~ 1180)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	Capillary
Liquid Size	1/4in (6.35mm)
Gas Size	3/8in (9.52mm)
Max. Piping Length(ft/m)	82.00 (25)
Max. Height Difference(ft/m)	49.20 (15)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	24.34 (0.69)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

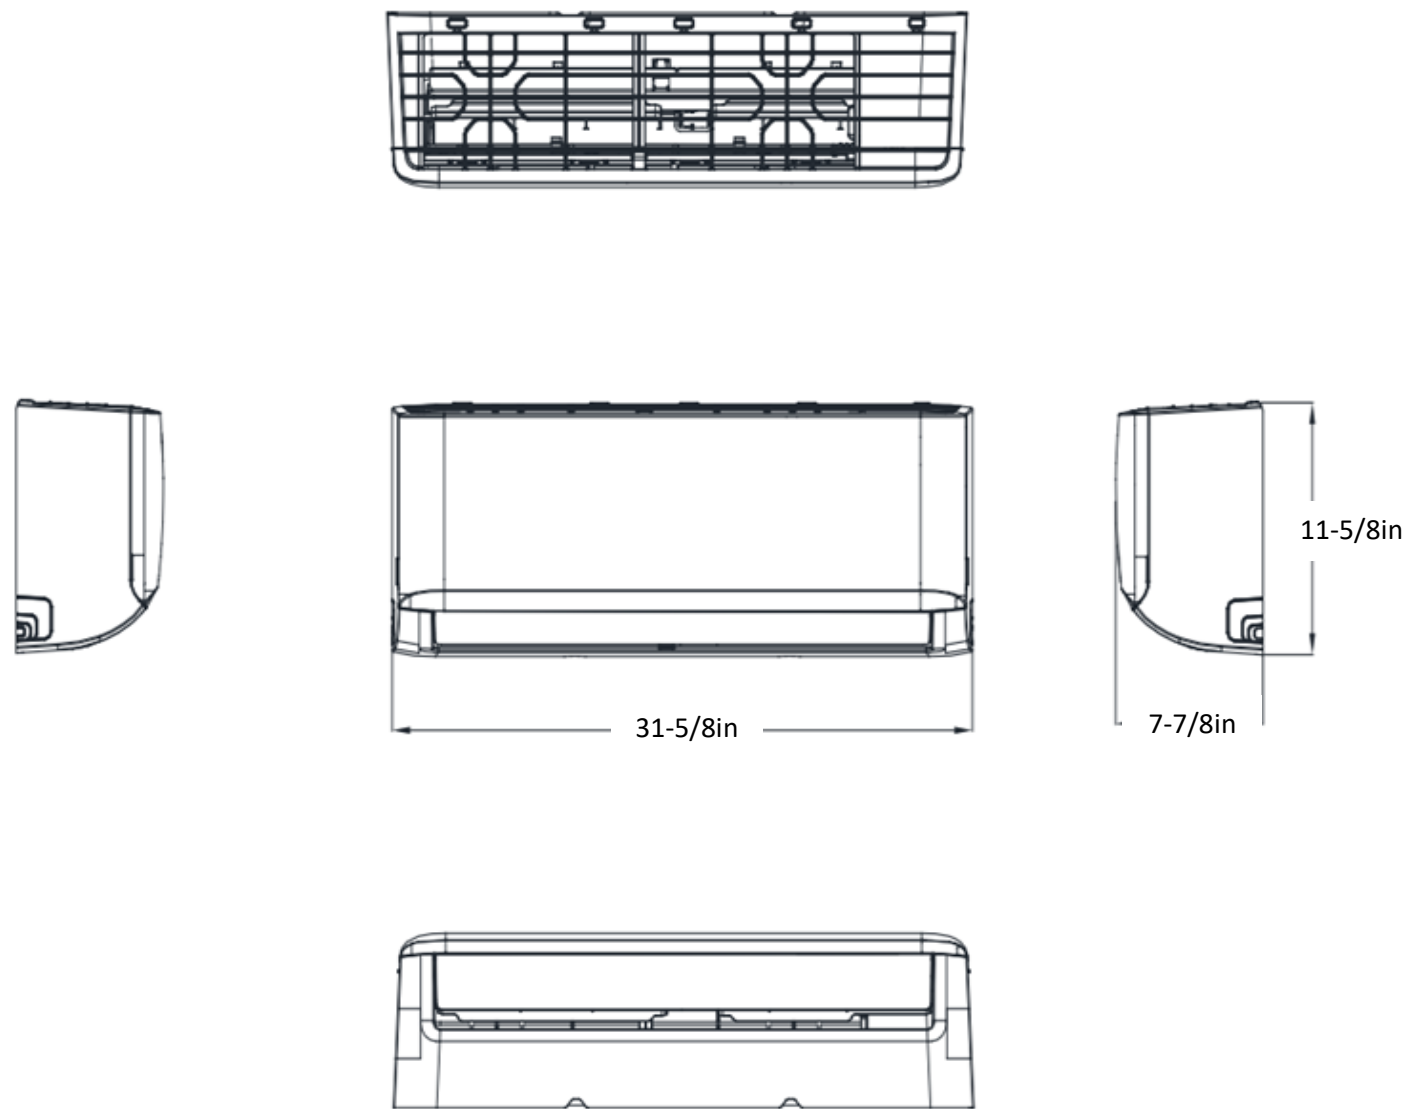


Indoor Unit Dimensions (Blow Up)

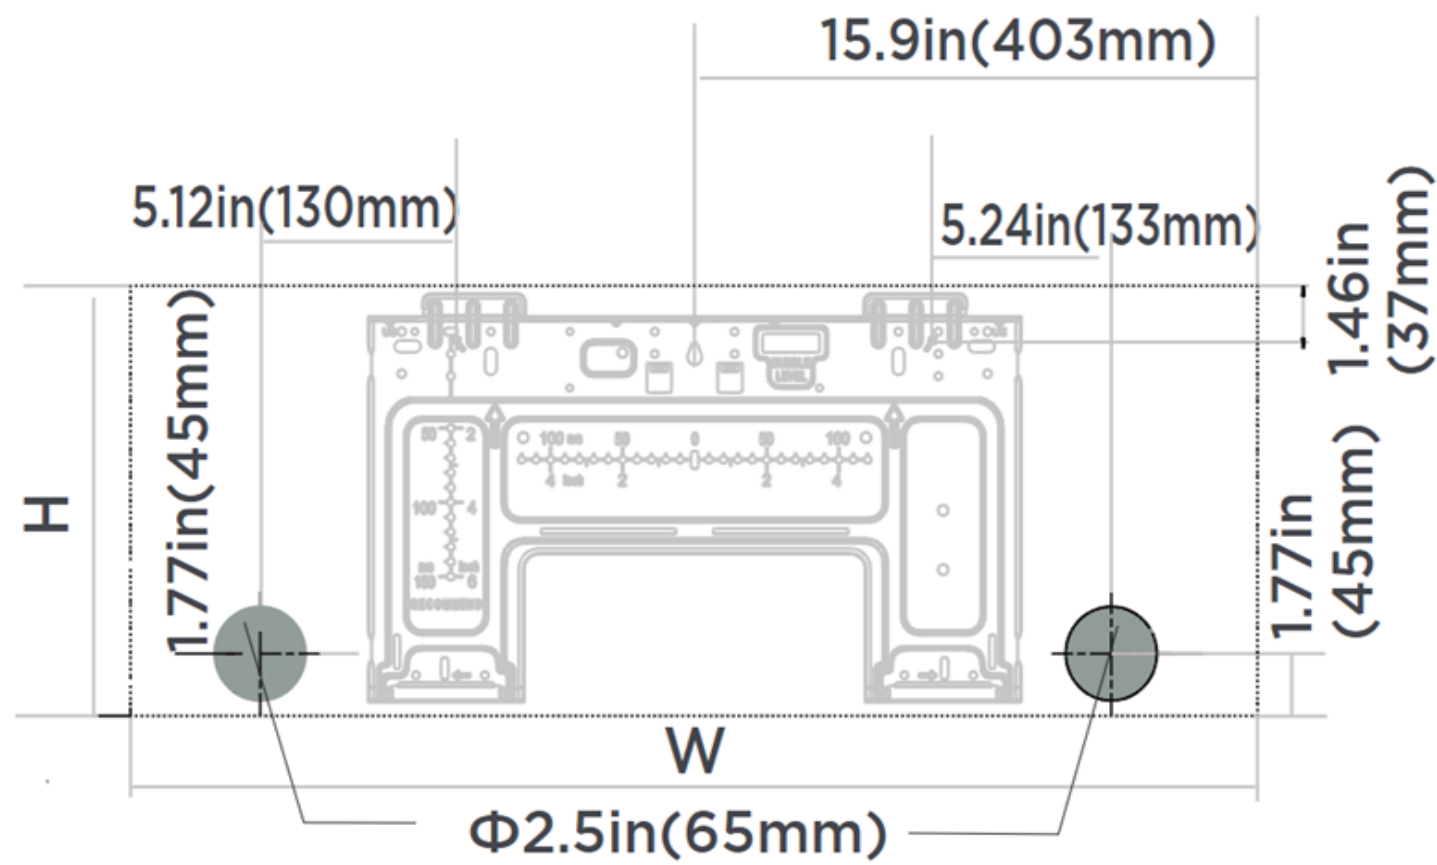

Indoor unit dimensions(WxH):
31.7in(806mm)x11.65in(296mm)

Outdoor Unit Dimension

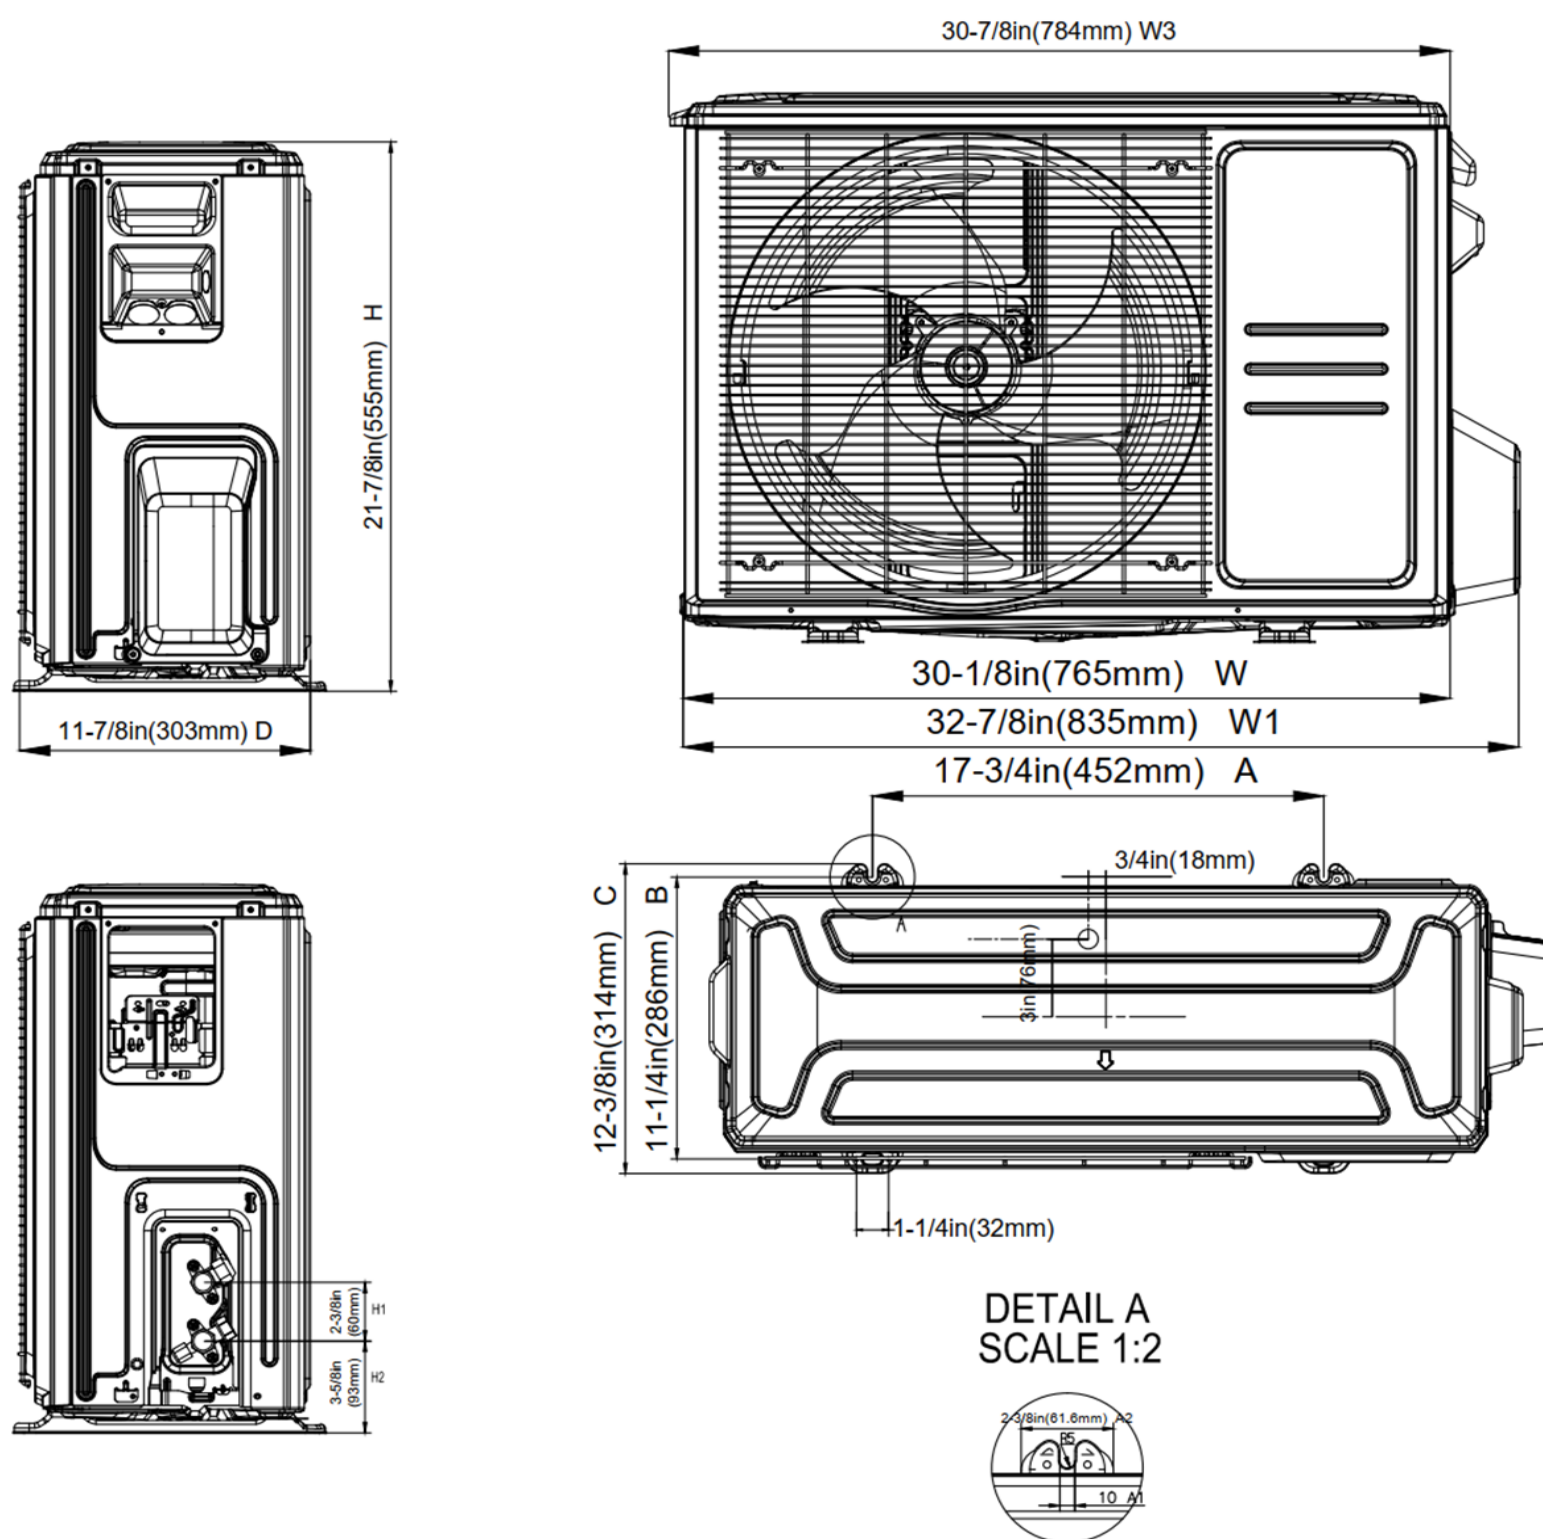

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.