


MOU-B24G-2/MIU-B24GW-2

24,000 BTU Wall-Mount Indoor/Heat Pump Outdoor Unit

Job Name:

Reference:

Date:

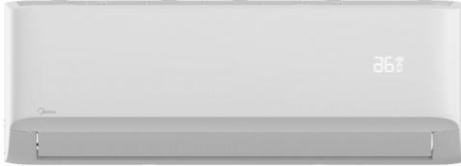

EFFICIENCY

Cooling		Heating	
SEER2	18.5	HSPF2-4	9
EER2	9.6	COP	3.22

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	24000
Min/Max Capacity	6200~24700
Moisture Removal(L/h)	3.0
Standard Operating Range(°F/°C)	5~122(-15 ~ 50)

Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	24000
1. @ 47°F Min/Max Capacity	11900~27200
2. @ 17°F Rated	17200
3. @ 5°F Rated: Capacity / COP	17000/2.11
3. @ 5°F Max: Capacity	17000
Standard Operating Range(°F/°C)	5~75(-15 ~ 24)

1. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 47°F DB/43°F WB

2. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 17°F DB/15°F WB

3. Conditions: Indoor: 70°F DB/60°F WB
Outdoor: 5°F DB/5°F WB

INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		729.9 / 547.4 / 400.2 / 329.6 / 329.6
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54.0 / 46 / 41.0 / 28 / 22
Dimension (W×D×H)	inch	42-5/8 × 9-1/4 × 13-5/16
	mm	(1082 × 234 × 337)
Package (W×D×H)	inch	45-1/2 × 16-3/8 × 12-7/16
	mm	(1155 × 415 × 315)
Net/Gross Weight	lbs	31 / 40
	kg	(14 / 18)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1764.7
Outdoor Noise Level (dBA)		62
Dimension (W×D×H)	inch	35-1/16 × 13-1/2 × 26-1/2
	mm	(890 × 342 × 673)
Package (W×D×H)	inch	39-3/16 × 15-11/16 × 29-1/8
	mm	(995 × 398 × 740)
Net/Gross Weight	lbs	95 / 103
	kg	(43 / 47)


ELECTRICAL

Power Supply		208/230V,60Hz,1Ph
System MCA		19
Connection Wiring		14x4
System MOCP		20
Compressor RLA		13.8
Outdoor Fan Motor RLA		0.8
Outdoor Fan Motor W		80
Indoor Fan Motor RLA		0.6
Indoor Fan Motor W		58
System Power Input @ Cooling (W)		2474 (290 ~ 2630)
System Power Input @ Heating (W)		2184 (970 ~ 2770)
MCA: Min. circuit amps (A)		MOCP: Max. over current protection (A)
RLA: Rated load amps (A)		W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)		N/A
Throttle type(Outdoor)		Throttle valve
Liquid Size		3/8in (9.52mm)
Gas Size		5/8in (15.9mm)
Max. Piping Length(ft/m)		164.00 (50)
Max. Height Difference(ft/m)		82.00 (25)
Max. Pre-charged Length(ft/m)		24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)		53.62 (1.52)
Additional Refrigerant Charge(oz/ft)/(g/m)		0.32 (30)
Connection Method		Flared

Indoor Unit Dimension

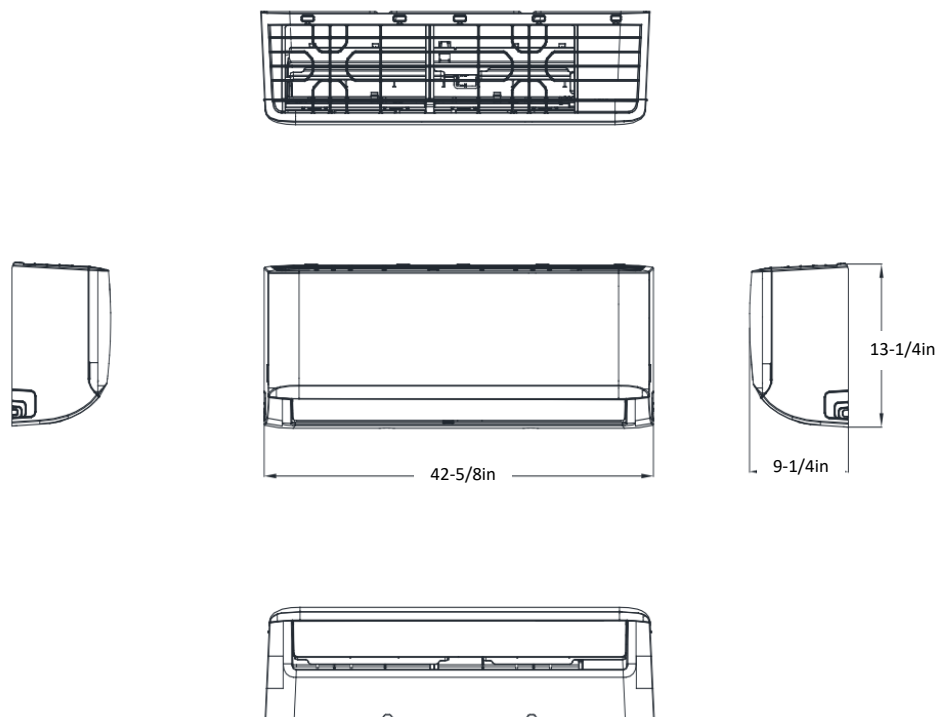


Indoor Unit Dimensions (Blow Up)

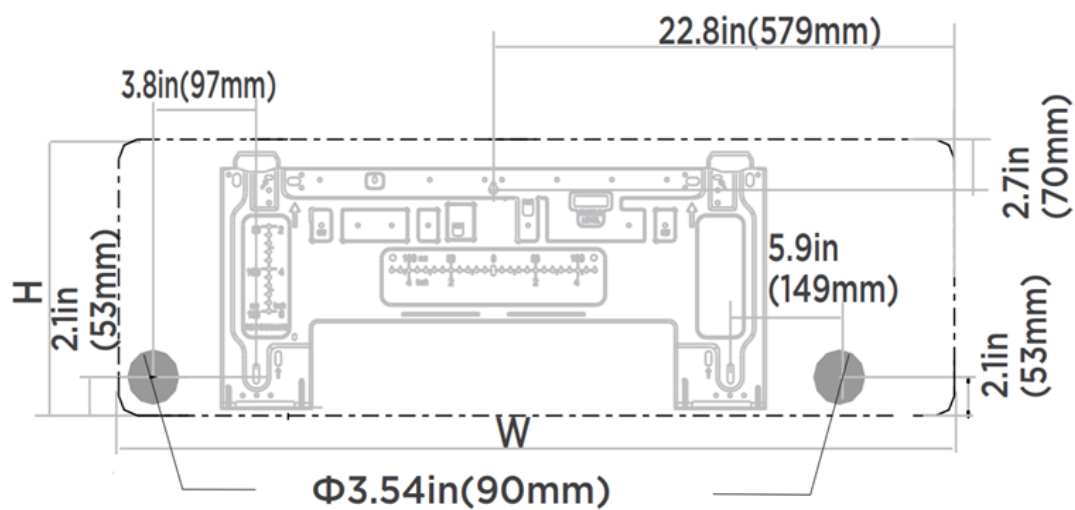

Indoor unit dimensions(WxH):
 $42.6\text{in}(1082\text{mm}) \times 13.3(338\text{mm})$

Outdoor Unit Dimension

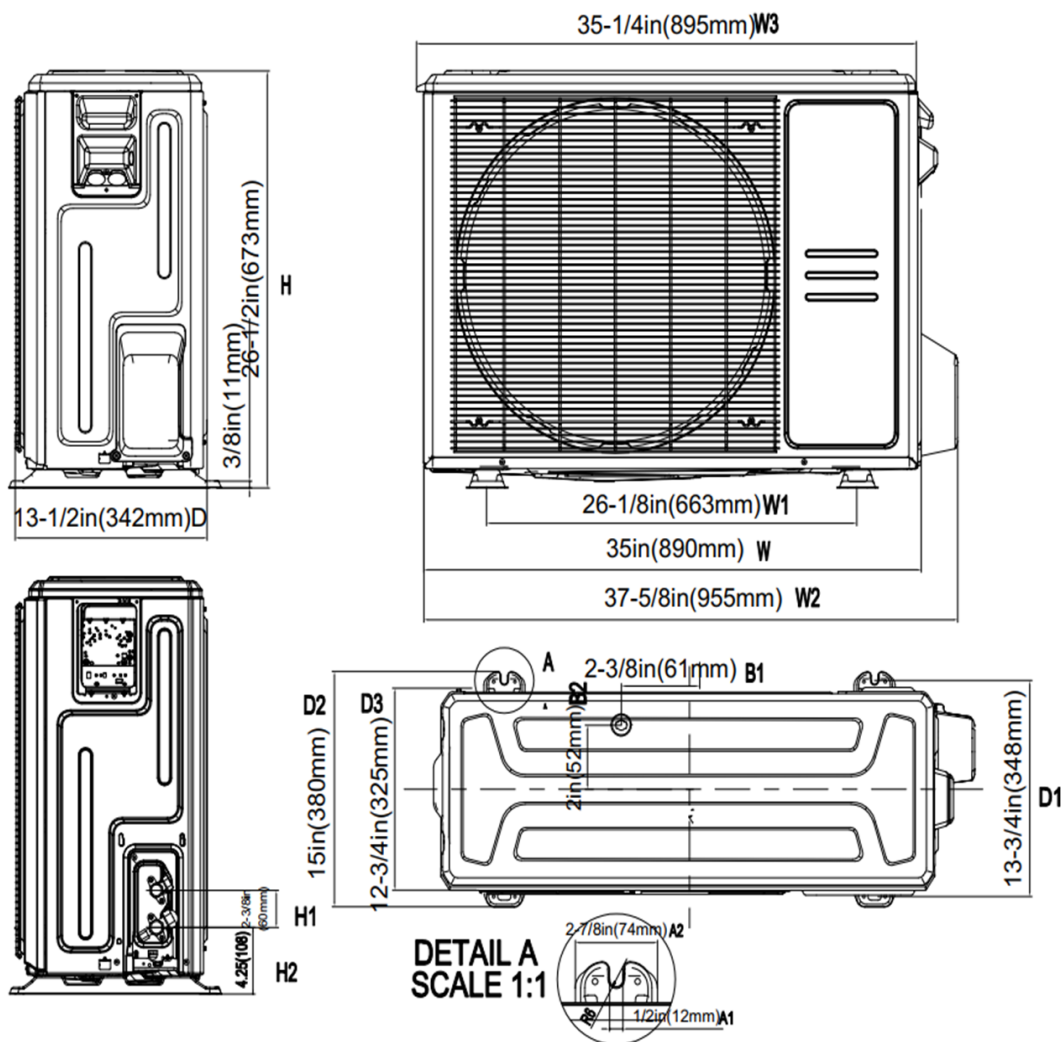

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.