


MIU-B09C-2

9,000 BTU 4-Way Cassette Indoor Unit

Job Name:	
Reference:	Date:

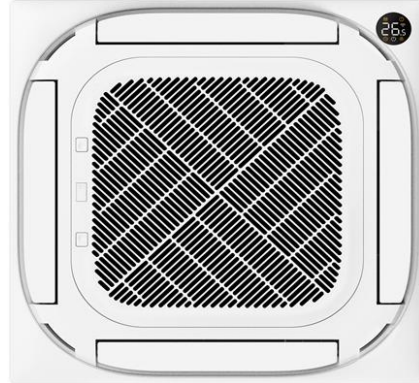


Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	9000
Heating Capacity	Btu/hr	10000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	1/4" (6.35mm)
Gas Side	inch(mm)	3/8" (9.52mm)
Drain Pipe Size	inch(mm)	1" (25mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	3
Indoor Fan Motor Model	-	ZKFN-45-8-2
Indoor Fan Motor Output	W	45
Indoor Fan Motor RLA	A	0.8
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	600 / 530 / 380




Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	353 / 312 / 265 / 183 / 147
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	43 / 40 / 38 / 26 / 24
Dimension (W×D×H)	inch	22-1/2 × 22-1/2 × 9-5/8
	mm	(570 × 570 × 245)
Package (W×D×H)	inch	28-1/8 × 25-1/4 × 11-5/8
	mm	(715 × 640 × 295)
Net Weight / Gross Weight	lbs	35 / 42
	kg	16 / 19

Indoor Unit Dimensions


Liquid side Gas side

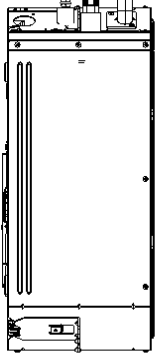

Body

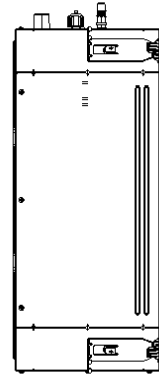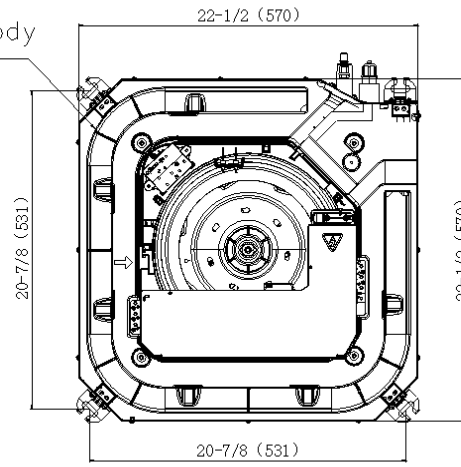

Panel

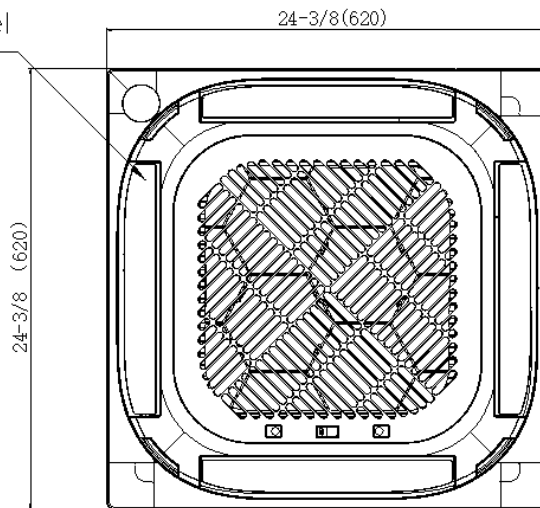

2 (50)

