

MOU-4B27G-2

27,000 BTU Multi-Zone Outdoor Unit

Job Name:

Reference:

Date:



EFFICIENCY

Cooling		Heating	
SEER2	21.0	HSPF2-4	9.0
EER2	12	COP	3.6

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	26600
Min/Max Capacity	7200~32000
Moisture Removal(L/h)	0.8
Standard Operating Range(°F/°C)	-13~122/(-25 ~ 50)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	26600
1. @ 47°F Min/Max Capacity	8400~28800
2. @ 17°F Rated(H32)	18400
3. @ 5°F Rated: Capacity / COP(H42)	18800/2
3. @ 5°F Max: Capacity	18800
Standard Operating Range(°F/°C)	-13~75/(-25 ~ 24)
1. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 5°F DB/5°F WB	

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		V74
Outdoor Air Flow (Max) (CFM)		2131.0
Outdoor Noise Level (dBA)		61
Dimension (W×D×H)	inch	37-1/4 × 16-3/16 × 31-15/16
	mm	(946 × 410 × 810)
Package (W×D×H)	inch	42-15/16 × 19-11/16 × 34-7/8
	mm	(1090 × 500 × 885)
Net/Gross Weight	lbs	139 / 150
	kg	(63 / 68)


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	23
Connection Wiring	AWG 14-4
System MOCP	25
Compressor RLA	12.1
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	2215 (500 ~ 2960)
System Power Input @ Heating (W)	2165 (500 ~ 2300)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Liquid Size	4 × 1/4in (4 × 6.35mm)
Gas Size	3×3/8in + 1×1/2in (3×9.52mm + 1×12.7mm)
Max. Piping Length for all rooms(ft/m)	262.4 (80)
Max. Piping Length for one IDU(ft/m)	114.8 (35)
Max. Height Difference of IDU and ODU(ft/m)	49.2 (15)
Refrigerant Pre-charged Amount(oz/kg)	84.66 (2.4)
Refrigerant Precharge Length(ft/m)	24.6 (7.5)x4
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16 (15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32 (30)
Connection Method	Flared

Outdoor Unit Dimension

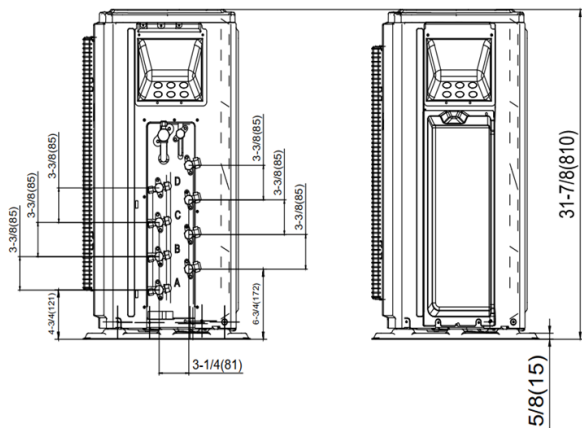

DETAIL A
SCALE 1:2

