

MOU-B48LH-2&MIU-B48LD-2

48,000 BTU Ducted Indoor Unit/Hyper Heat Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1648.1 / 1471.5 / 1294.9 / 1059.5 / 1059.5
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		51 / 51 / 46 / 42 / 40
Indoor static pressure range(in.w.g.)		0-0.8
Dimension (W×D×H)	inch	47-1/4 × 29-9/16 × 11-13/16
	mm	(1200 × 750 × 300)
Package (W×D×H)	inch	56-1/8 × 33-7/8 × 14-3/16
	mm	(1425 × 860 × 359)
Net/Gross Weight	lbs	112 / 125
	kgs	(51 / 57)

OUTDOOR SPECIFICATION

Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ420D1UMUA
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1460ml
Refrigerant Oil		#REF!
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		65
Dimension (W×D×H)	inch	37-1/2 × 16-3/8 × 52-1/2
	mm	(952 × 415 × 1333)
Package (W×D×H)	inch	43-1/8 × 19-1/2 × 57-1/2
	mm	(1095 × 495 × 1460)
Net/Gross Weight	lbs	209 / 240
	kgs	(95 / 109)

EFFICIENCY

Cooling		Heating	
SEER2	16.7	HSPF2-4	10.8
EER2	10.4	COP	3.6

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	48000
Min/Max Capacity	11000~56500
Moisture Removal(L/h)	4.22
Standard Operating Range(*F/*C)	-22 ~ 122(-30 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	52000
1. @ 47°F Min/Max Capacity	11200~60000
2. @ 17°F Rated	45000
3. @ 5°F Rated: Capacity / COP	47500/2.00
3. @ 5°F Max: Capacity	47500
Standard Operating Range(*F/*C)	-22 ~ 75(-30 ~ 24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL


Power Supply	208/230V,60Hz,1Ph
System MCA	44
Connection Wiring	14x3
System MOC	45
Compressor RLA	27
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	4
Indoor Fan Motor W	560
System Power Input @ Cooling (W)	4610 (930 ~ 6050)
System Power Input @ Heating (W)	4230 (770 ~ 5380)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	75 (246.00)
Max. Height Difference(ft/m)	30 (98.40)
Max. Pre-charged Length(ft/m)	7.5 (24.6)
Refrigerant Pre-charged Amount(oz/kg)	3.60 (126.99)
Additional Charge of Refrigerant(oz/ft)/(g/m)	30 (0.32)
Connection Method	Flared


*The gas valve of the outdoor unit is 5/8", 5/8" to 3/4" flare to flare connector is required for the installation.

Indoor Unit Dimension

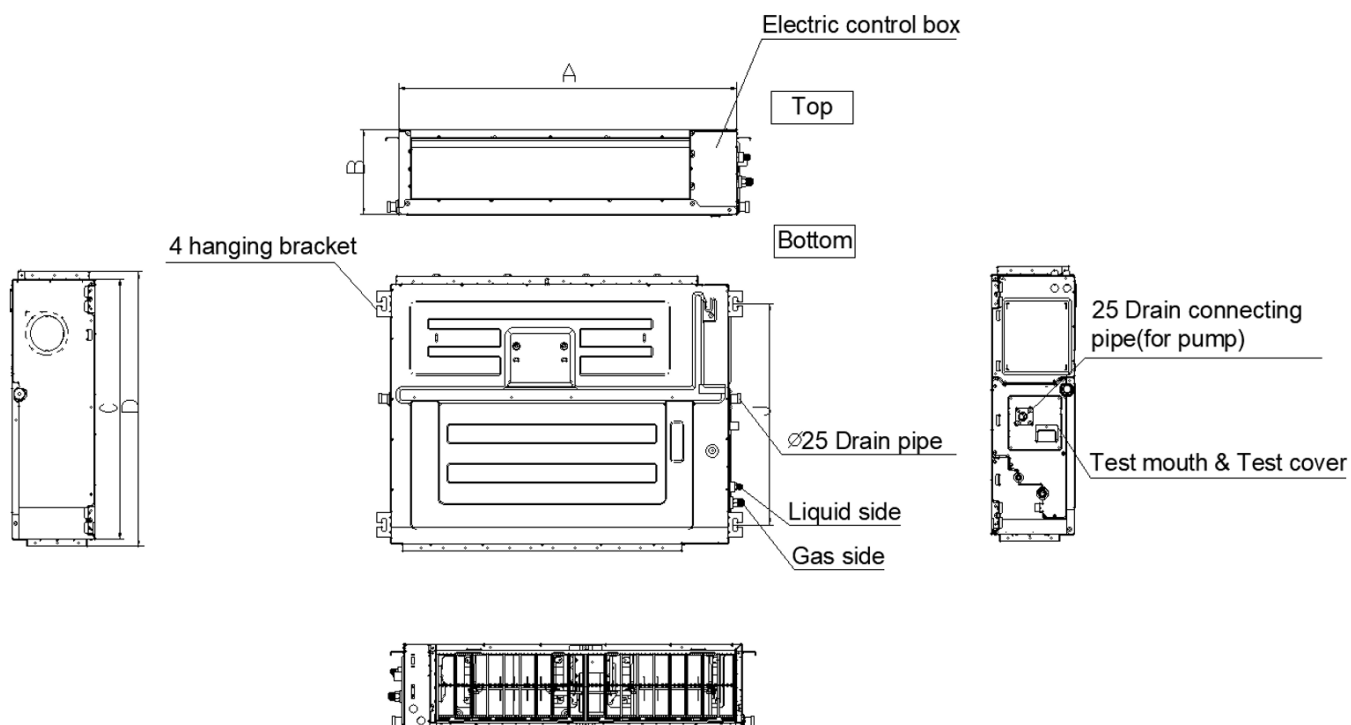


MODEL	A	B	C	D
9K	27-1/2in(700mm)	7-7/8in(200mm)	17-3/4(450mm)	20in(506mm)
12K	27-1/2in(700mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
18K~24K	39-3/8in(1000mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
36K~48K	47-1/8in(1200mm)	11-7/8in(300mm)	29-1/2(750mm)	31-1/4in(795mm)
60K	55-1/8in(1400mm)	15in(380mm)	31-1/2in(800mm)	33-1/4in(845mm)

Outdoor Unit Dimension

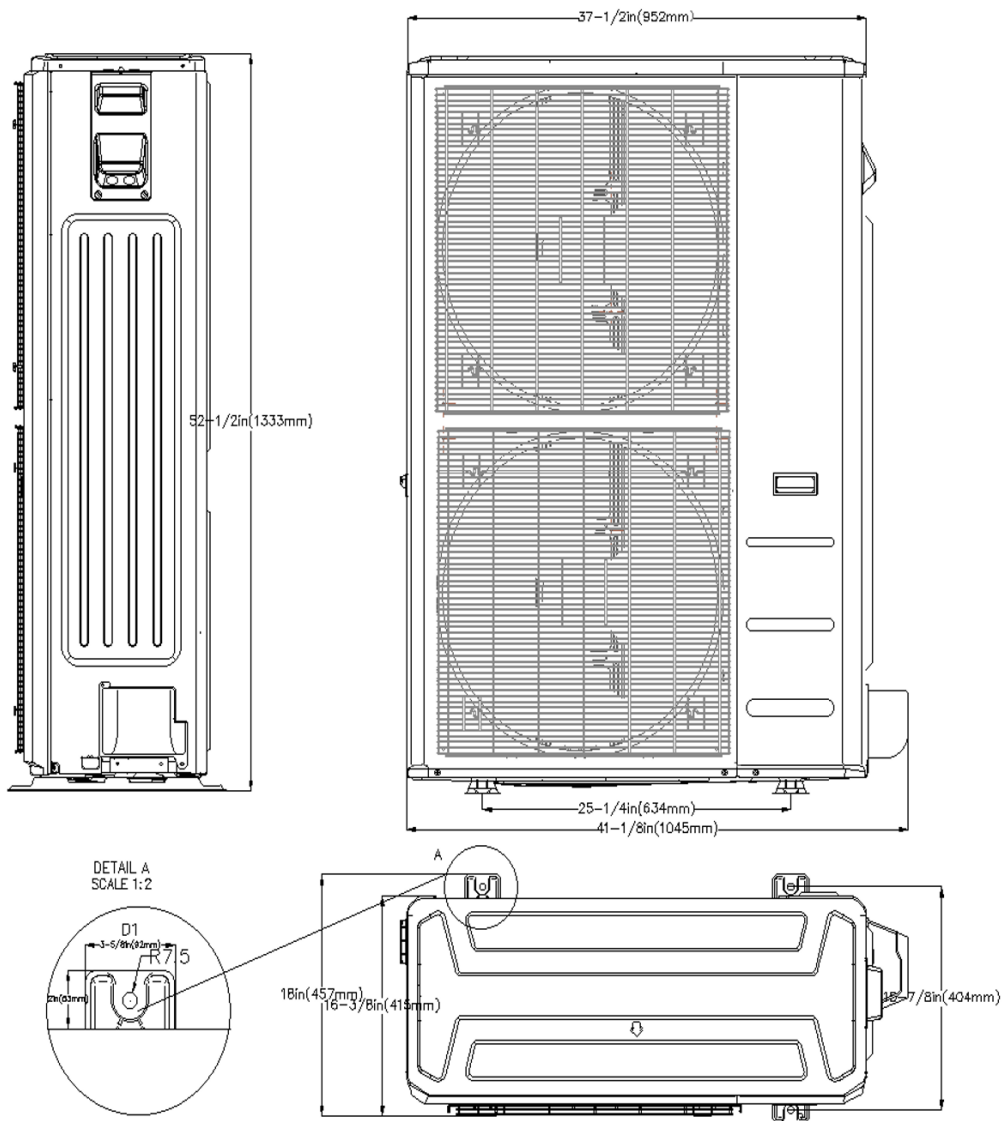

Indoor Unit Fan Performance

Constant air volume

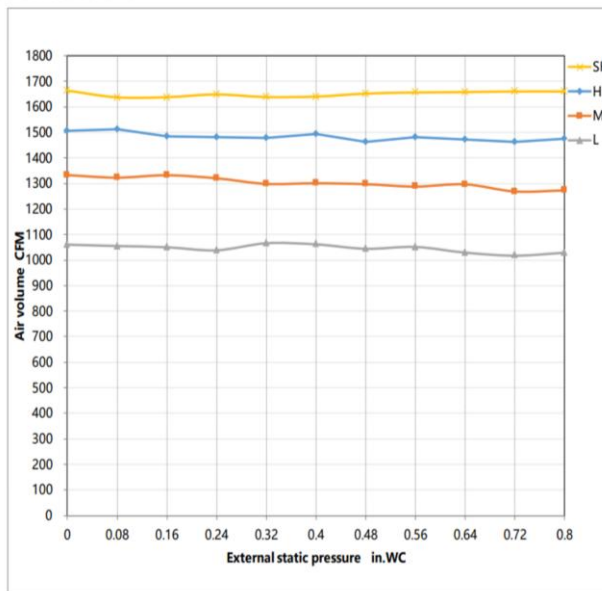

General Features

GENERAL FEATURES

- Compatible with both horizontal and vertical installation
- Static pressure up to 0.8 in.w.g(for all models)
- Static pressure setting stages: 8
- Refrigerant leakage detection sensor
- Constant airflow
- Built-in pump
- i-clean
- Fan speed stages: 1~100%
- WiFi capability: through wired controller with built-in WiFi
- OTA(by using wired controller 120N(X6W))
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.