

MOU-B48LH-2&MIU-B48LF-2

48,000 BTU Floor Mounted Indoor/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1353.8 / 1236.1 / 1083.0 / 800.5 / 665.1
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54 / 53 / 48.5 / 39 / 35
Dimension (W×D×H)	inch	65 × 26-5/8 × 9-1/4
	mm	(1650 × 675 × 235)
Package (W×D×H)	inch	67-15/16 × 29-3/4 × 12-9/16
	mm	(1725 × 755 × 318)
Net/Gross Weight	lbs	90 / 106
	kg	(41 / 48)

OUTDOOR SPECIFICATION

Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ420D1UMUA
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1460
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		64.5
Dimension (W×D×H)	inch	37-1/2 × 16-3/8 × 52-1/2
	mm	(952 × 415 × 1333)
Package (W×D×H)	inch	43-1/8 × 19-1/2 × 57-1/2
	mm	(1095 × 495 × 1460)
Net/Gross Weight	lbs	209 / 240
	kg	(95 / 109)

EFFICIENCY

Cooling		Heating	
SEER2	18.5	HSPF2-4	10.1
EER2	9.4	COP	2.86

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	48000
Min/Max Capacity	6700~53500
Moisture Removal(L/h)	6.32
Standard Operating Range(°F/°C)	-22 ~ 122(-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	52000
1. @ 47°F Min/Max Capacity	18800~58700
2. @ 17°F Rated	38500
3. @ 5°F Rated: Capacity / COP	47000/1.83
3. @ 5°F Max: Capacity	47000
Standard Operating Range(°F/°C)	-22 ~ 75(-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	44
Connection Wiring	14/4
System MOC	45
Compressor RLA	27
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	1
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	5106 (730 ~ 5760)
System Power Input @ Heating (W)	5330 (1145 ~ 5900)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	75 (246.00)
Max. Height Difference(ft/m)	30 (98.40)
Max. Pre-charged Length(ft/m)	7.5 (24.6)
Refrigerant Pre-charged Amount(oz/g)	3.60 (126.99)
Additional Refrigerant Charge(oz/ft)/(g/m)	30 (0.32)
Connection Method	Flared

Indoor Unit Dimension

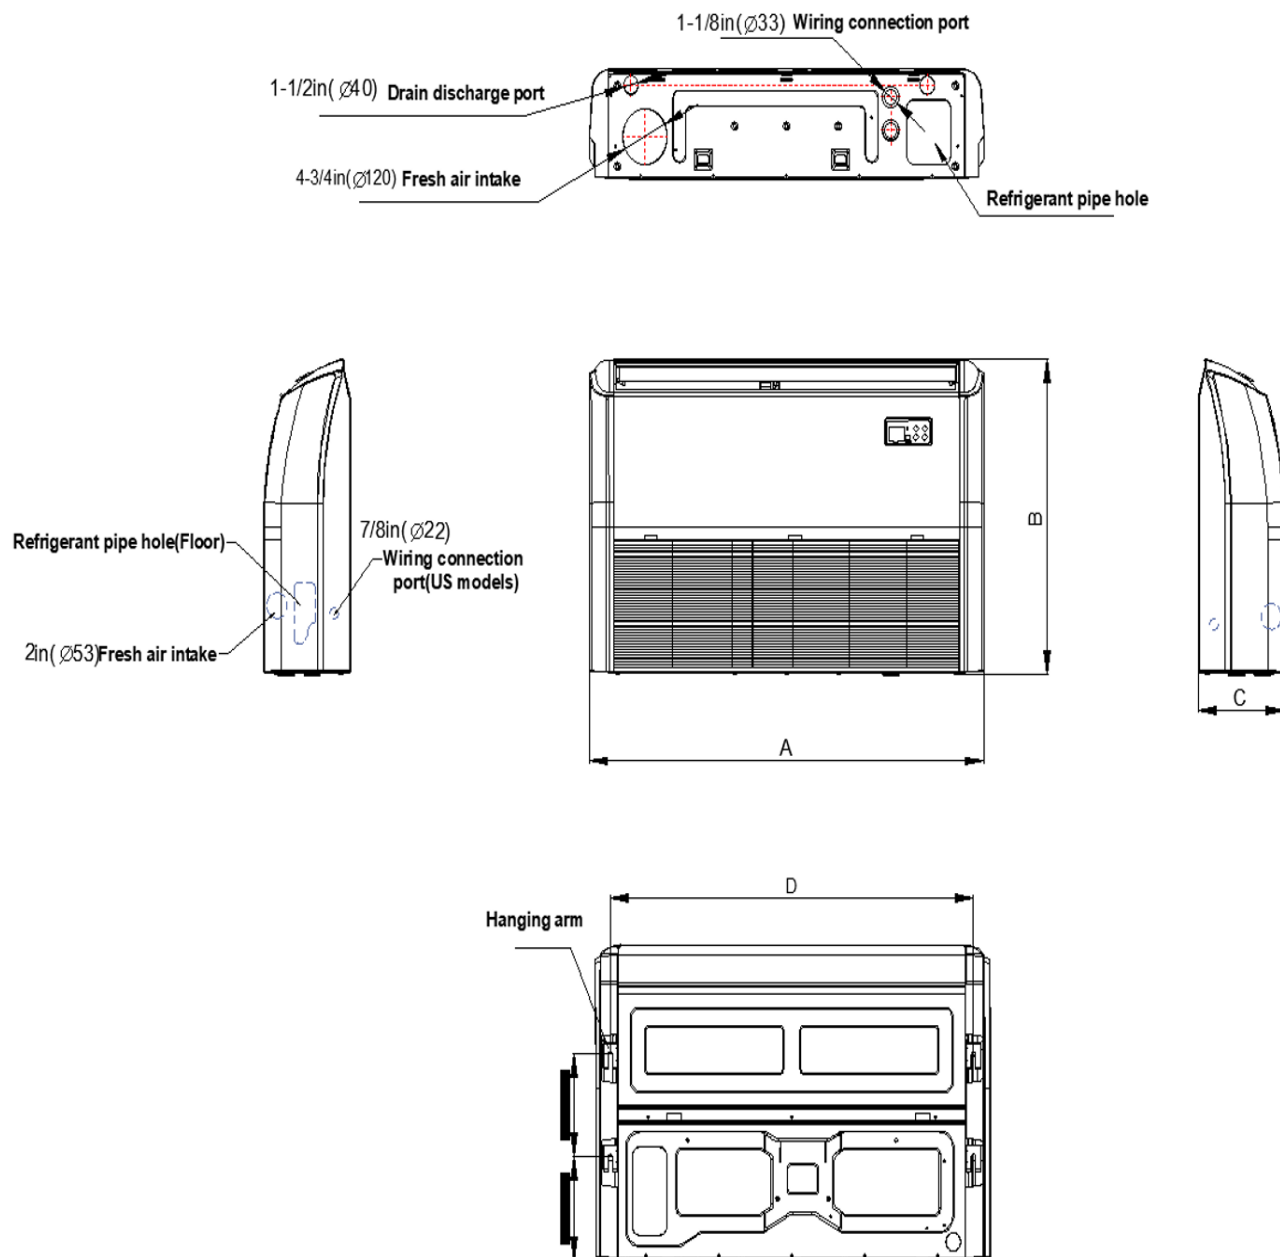

Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Outdoor Unit Dimension

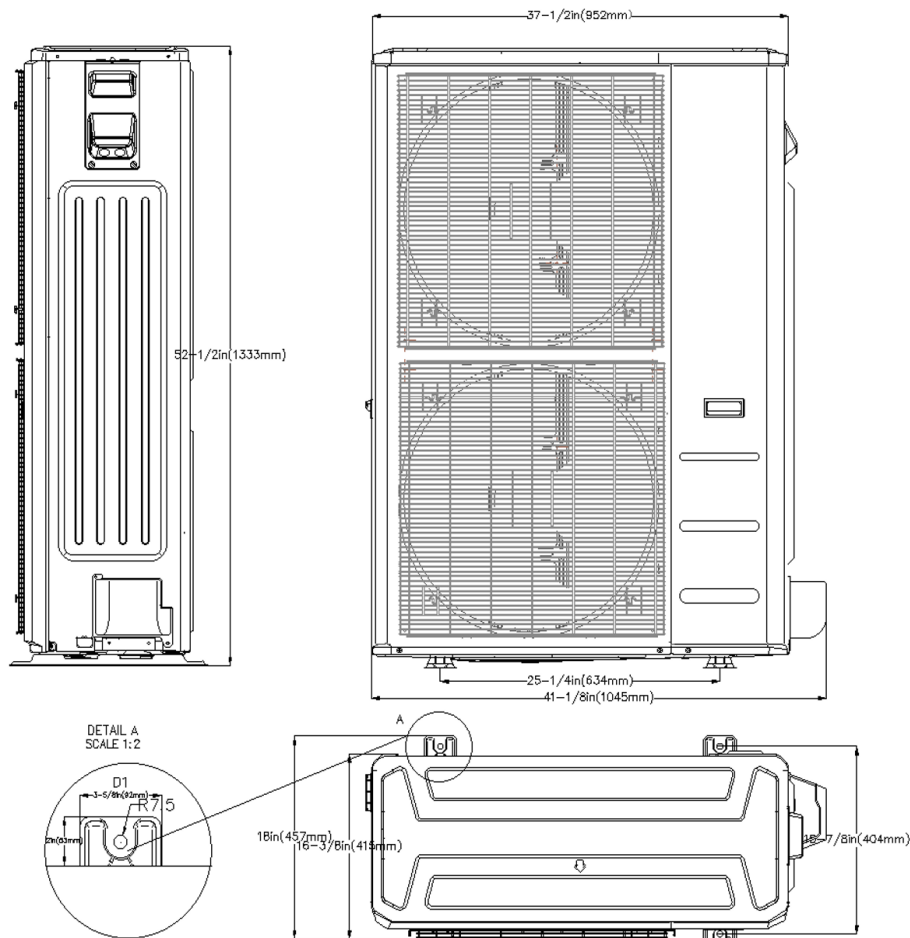

General Features

GENERAL FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- 88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat

*24V interface is required.