

MOU-B55LH-2&MIU-B60LF-2

60,000 BTU Floor Mounted Indoor/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1365.6 / 1236.1 / 1118.3 / 882.9 / 777.0
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54.5 / 54.5 / 49 / 42 / 39
Dimension (W×D×H)	inch	65 × 26-5/8 × 9-1/4
	mm	(1650 × 675 × 235)
Package (W×D×H)	inch	67-15/16 × 29-3/4 × 12-9/16
	mm	(1725 × 755 × 318)
Net/Gross Weight	lbs	96 / 112
	kg	(44 / 51)

OUTDOOR SPECIFICATION

Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ440D1UMUB
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1300
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		64.5
Dimension (W×D×H)	inch	37-1/2 × 16-3/8 × 52-1/2
	mm	(952 × 415 × 1333)
Package (W×D×H)	inch	43-1/8 × 19-1/2 × 58-5/16
	mm	(1095 × 495 × 1480)
Net/Gross Weight	lbs	231 / 262
	kg	(105 / 119)

EFFICIENCY

Cooling		Heating	
SEER2	18	HSPF2-4	10.7
EER2	9.0	COP	3.02

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	54000
Min/Max Capacity	20000~54500
Moisture Removal(L/h)	7.16
Standard Operating Range(°F/°C)	-22 ~ 122(-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	60000
1. @ 47°F Min/Max Capacity	21700~65500
2. @ 17°F Rated	41000
3. @ 5°F Rated: Capacity / COP	54000/1.91
3. @ 5°F Max: Capacity	54000
Standard Operating Range(°F/°C)	-22 ~ 75(-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	44
Connection Wiring	14/4
System MOC	45
Compressor RLA	26.8
Outdoor Fan Motor RLA	2.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	2
Indoor Fan Motor W	160
System Power Input @ Cooling (W)	6000 (2000 ~ 5900)
System Power Input @ Heating (W)	5823 (1240 ~ 6000)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	75 (246.00)
Max. Height Difference(ft/m)	30 (98.40)
Max. Pre-charged Length(ft/m)	7.5 (24.6)
Refrigerant Pre-charged Amount(oz/g)	4.30 (151.68)
Additional Refrigerant Charge(oz/ft)/(g/m)	30 (0.32)
Connection Method	Flared

Indoor Unit Dimension

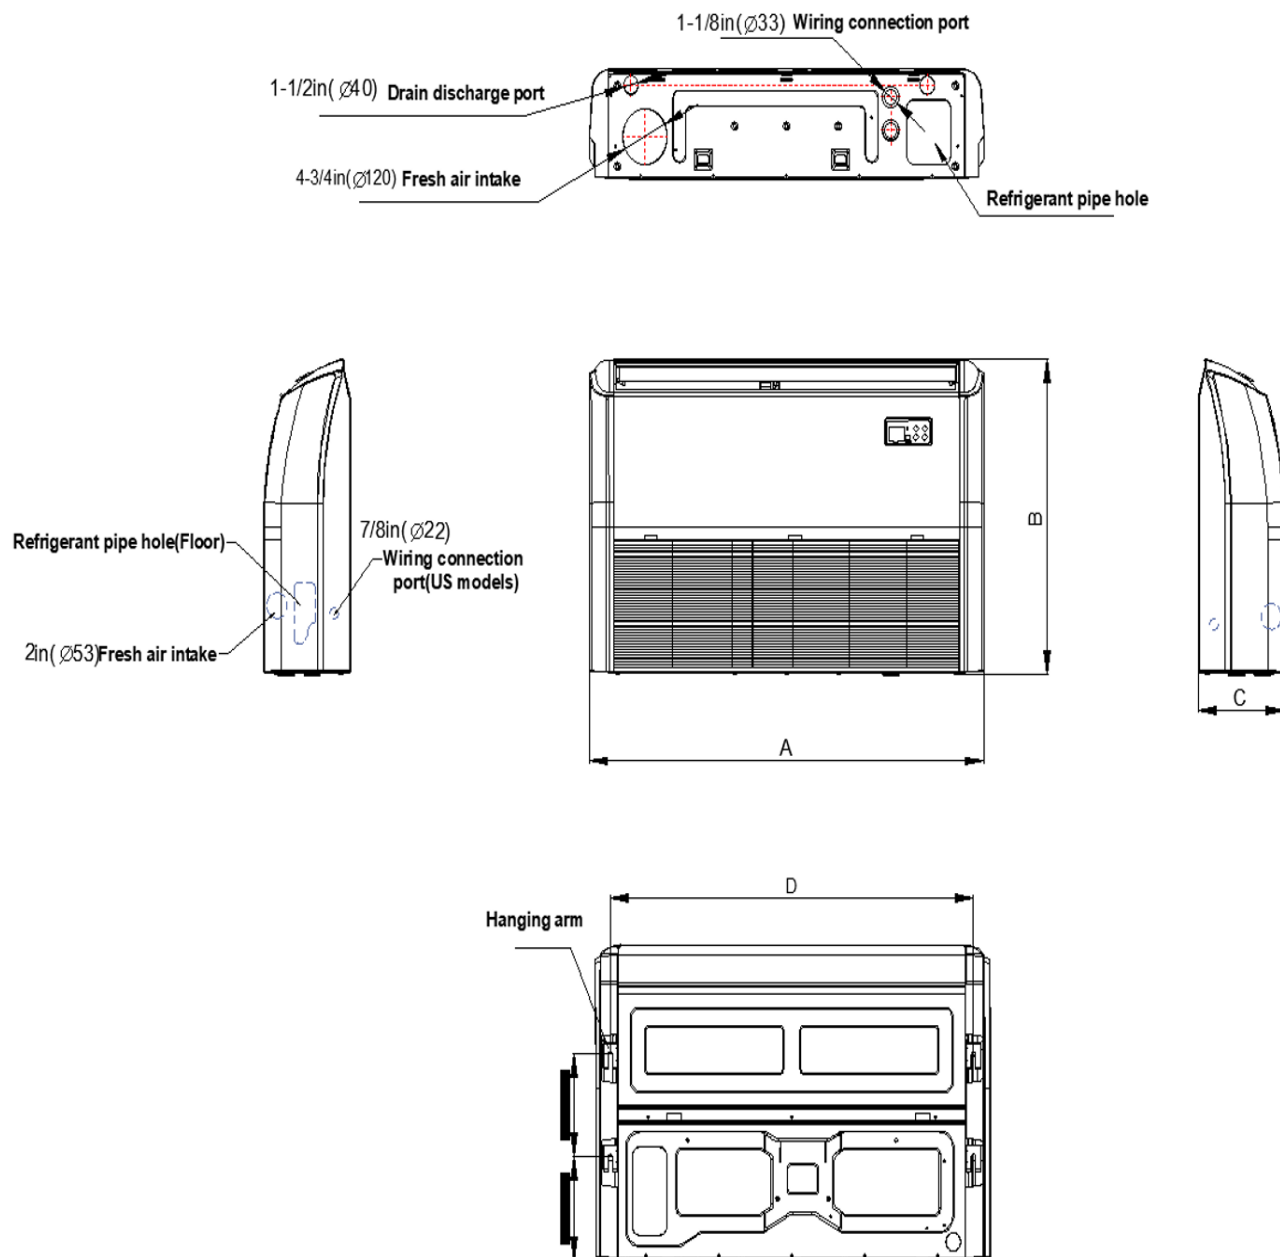

Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Outdoor Unit Dimension

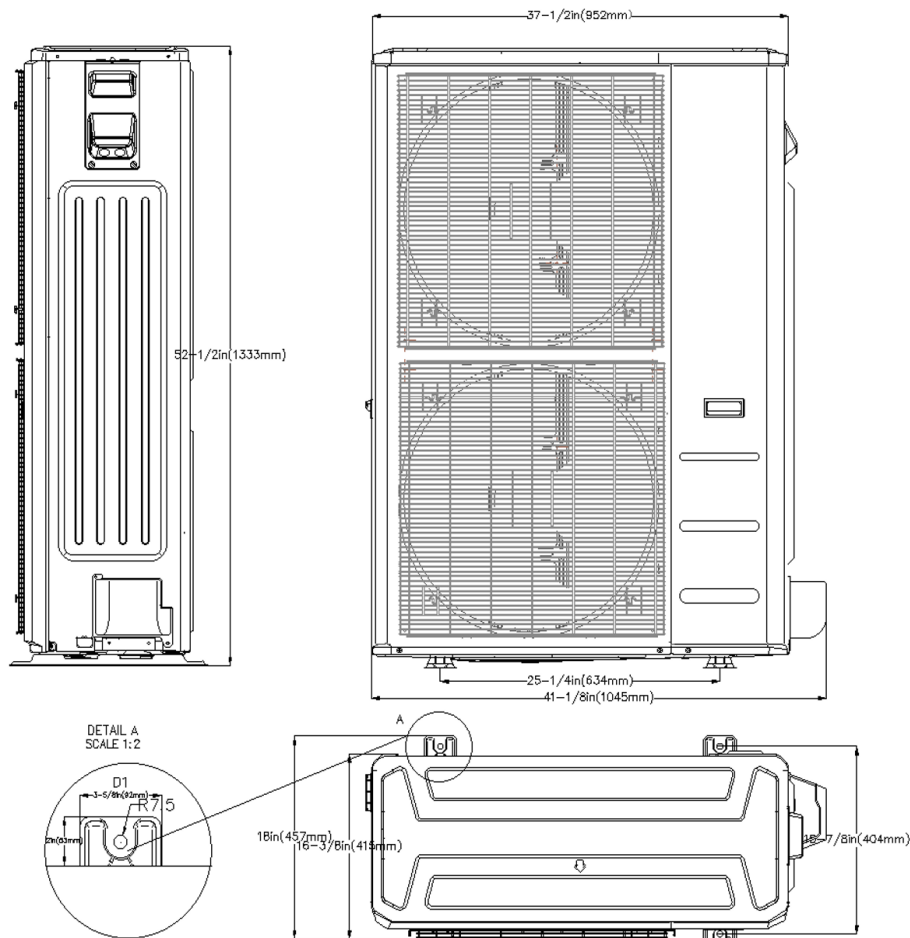

General Features

GENERAL FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- 88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat

*24V interface is required.