

MOU-B55LH-2&MIU-B60LD-2

60,000 BTU Ducted Indoor Unit/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		2001.2 / 1706.9 / 1412.6 / 1118.3 / 1118.3
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		52 / 52 / 48 / 42 / 41
Indoor static pressure range(in.w.g.)		0-0.8
Dimension (W×D×H)	inch	55-1/8 × 31-1/2 × 15
	mm	(1400 × 800 × 380)
Package (W×D×H)	inch	63 × 36-1/16 × 17-9/16
	mm	(1600 × 915 × 445)
Net/Gross Weight	lbs	162 / 179
	kgs	(74 / 81)

OUTDOOR SPECIFICATION

Compressor Type		TWIN-ROTARY
Compressor Model		EKPQ440D1UMUB
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1300ml
Refrigerant Oil		7.3
Outdoor Air Flow (Max) (CFM)		4237.9
Outdoor Noise Level (dBA)		63
Dimension (W×D×H)	inch	37-1/2 × 16-3/8 × 52-1/2
	mm	(952 × 415 × 1333)
Package (W×D×H)	inch	43-1/8 × 19-1/2 × 58-5/16
	mm	(1095 × 495 × 1480)
Net/Gross Weight	lbs	231 / 262
	kgs	(105 / 119)

EFFICIENCY

Cooling		Heating	
SEER2	15.8	HSPF2-4	10.4
EER2	10.2	COP	3.74

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	55000
Min/Max Capacity	14200~60000
Moisture Removal(L/h)	3.63
Standard Operating Range(*F/*C)	-22 ~ 122(-30 ~ 50)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	60000
1. @ 47°F Min/Max Capacity	11200~66000
2. @ 17°F Rated	45000
3. @ 5°F Rated: Capacity / COP	53500/2.10
3. @ 5°F Max: Capacity	53500
Standard Operating Range(*F/*C)	-22 ~ 75(-30 ~ 24)
1. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor Operating at Max. Frequency	
Indoor: 70°F DB/60°F WB	
Outdoor: 5°F DB/5°F WB	

ELECTRICAL


Power Supply	208/230V,60Hz,1Ph
System MCA	44
Connection Wiring	14/4
System MOC	45
Compressor RLA	26.8
Outdoor Fan Motor RLA	2.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	4
Indoor Fan Motor W	560
System Power Input @ Cooling (W)	5400 (1160 ~ 6120)
System Power Input @ Heating (W)	4700 (795 ~ 5150)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	75 (246.00)
Max. Height Difference(ft/m)	30 (98.40)
Max. Pre-charged Length(ft/m)	7.5 (24.6)
Refrigerant Pre-charged Amount(oz/kg)	4.30 (151.68)
Additional Charge of Refrigerant(oz/ft)/(g/m)	30 (0.32)
Connection Method	Flared


*The gas valve of the outdoor unit is 5/8", 5/8" to 3/4" flare to flare connector is required for the installation.

Indoor Unit Dimension

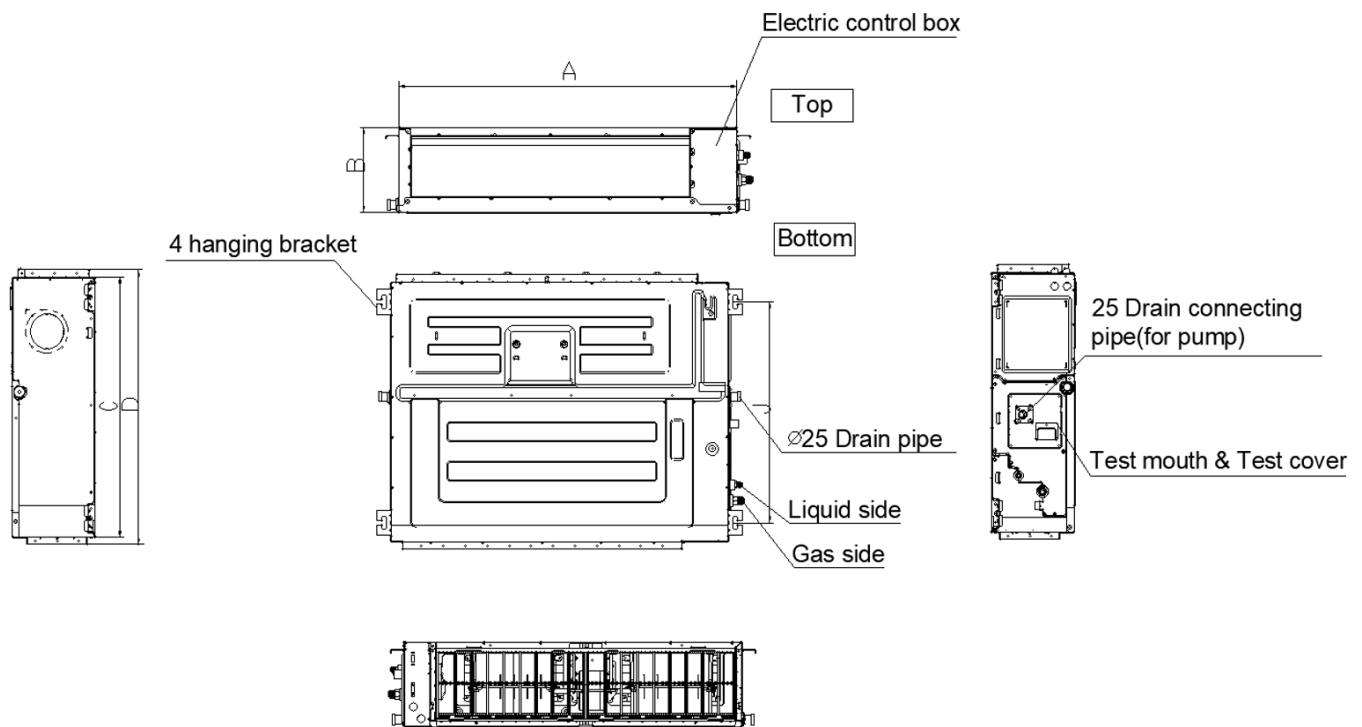


MODEL	A	B	C	D
9K	27-1/2in(700mm)	7-7/8in(200mm)	17-3/4(450mm)	20in(506mm)
12K	27-1/2in(700mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
18K~24K	39-3/8in(1000mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
36K~48K	47-1/8in(1200mm)	11-7/8in(300mm)	29-1/2(750mm)	31-1/4in(795mm)
60K	55-1/8in(1400mm)	15in(380mm)	31-1/2in(800mm)	33-1/4in(845mm)

Outdoor Unit Dimension

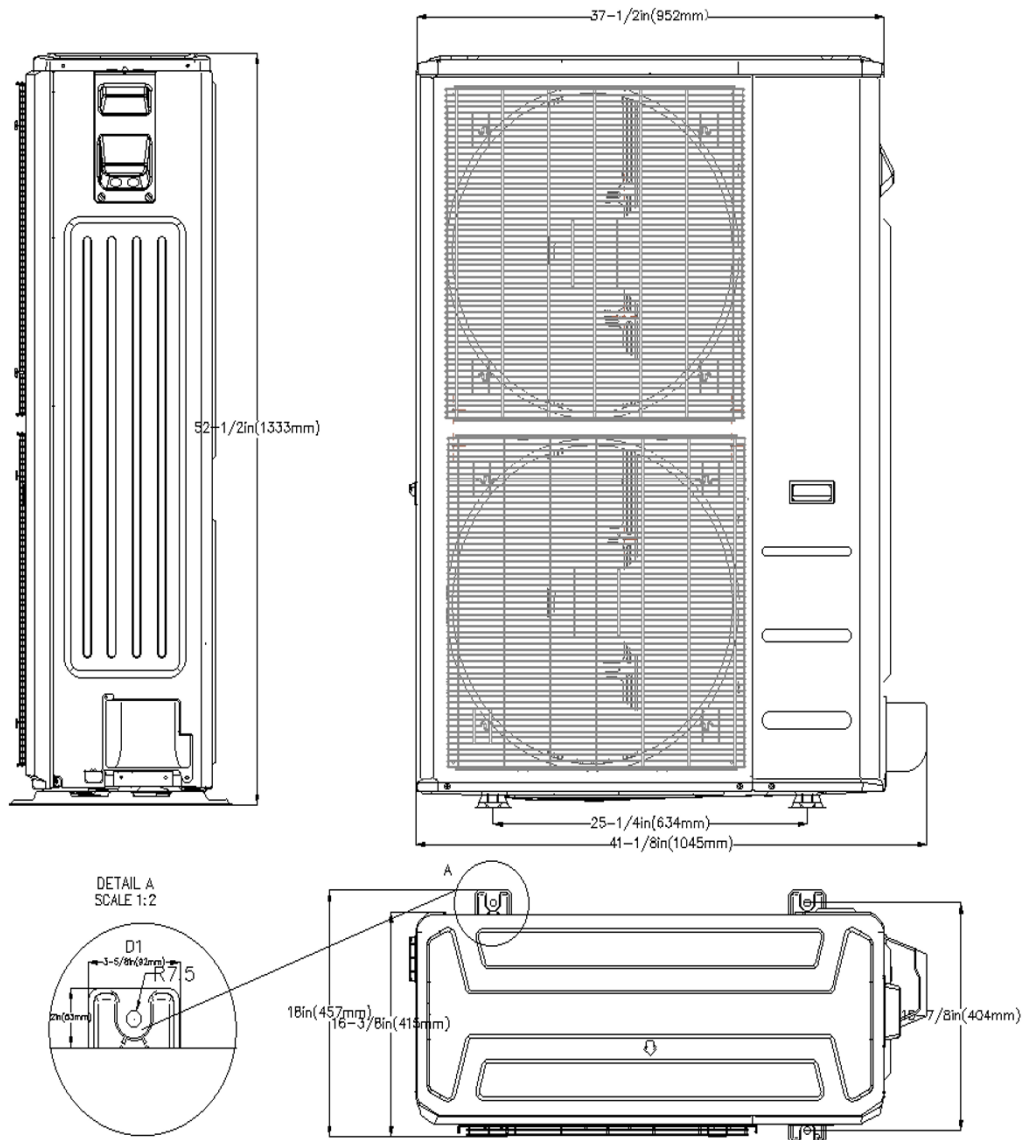

Indoor Unit Fan Performance

Constant air volume

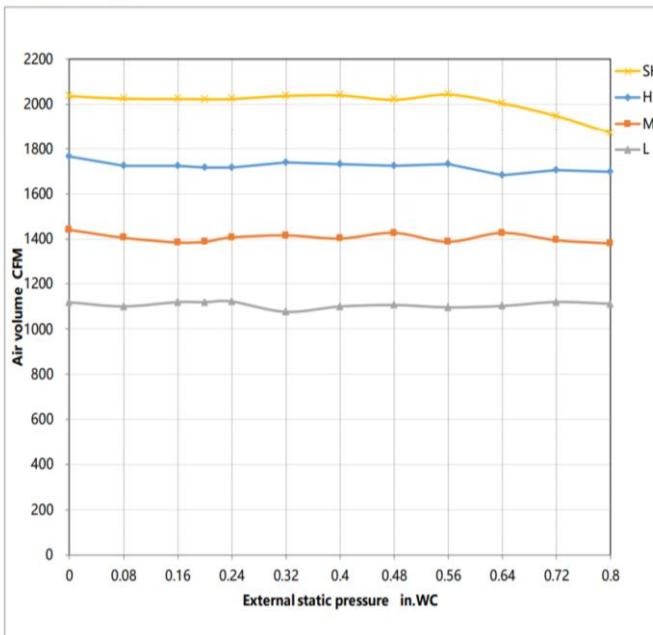

General Features

GENERAL FEATURES

- Compatible with both horizontal and vertical installation
- Static pressure up to 0.8 in.w.g(for all models)
- Static pressure setting stages: 8
- Refrigerant leakage detection sensor
- Constant airflow
- Built-in pump
- i-clean
- Fan speed stages: 1~100%
- WiFi capability: through wired controller with built-in WiFi
- OTA(by using wired controller 120N(X6W))
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.