

# MOU-B60L-2&MIU-B60LD-2

## 60,000 BTU Ducted Indoor Unit/Heat Pump Outdoor Unit

|            |       |
|------------|-------|
| Job Name:  |       |
| Reference: | Date: |



### INDOOR SPECIFICATION

|                                           |                                            |
|-------------------------------------------|--------------------------------------------|
| Indoor Air Flow (Turbo/H/M/L/Si) (CFM)    | 2001.2 / 1706.9 / 1412.6 / 1118.3 / 1118.3 |
| Indoor Noise Level (Turbo/H/M/L/Si) (dBA) | 52 / 52 / 48 / 43 / 42                     |
| Indoor static pressure range(in.w.g.)     | 0-0.8                                      |
| Dimension (W×D×H)                         | inch<br>mm                                 |
| Package (W×D×H)                           | inch<br>mm                                 |
| Net/Gross Weight                          | lbs<br>kgs                                 |

### OUTDOOR SPECIFICATION

|                              |             |
|------------------------------|-------------|
| Compressor Type              | ROTARY      |
| Compressor Model             | KTQ420D1UMU |
| Refrigerant                  | R454B       |
| Refrigerant Oil Charge(mL)   | 1400        |
| Refrigerant Oil              | 7           |
| Outdoor Air Flow (Max) (CFM) | 4237.9      |
| Outdoor Noise Level (dBA)    | 64          |
| Dimension (W×D×H)            | inch<br>mm  |
| Package (W×D×H)              | inch<br>mm  |
| Net/Gross Weight             | lbs<br>kgs  |

### EFFICIENCY

| Cooling | Heating |
|---------|---------|
| SEER2   | HSPF2-4 |
| EER2    | COP     |

### PERFORMANCE of Cooling

| Cooling (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| Rated Capacity                  | 58000                                               |
| Min/Max Capacity                | 14600~63000                                         |
| Moisture Removal(L/h)           | 5.24                                                |
| Standard Operating Range(*F/*C) | -13~122(-25 ~ 50)                                   |
| Rated Cooling Conditions:       | Indoor: 80°F DB/67°F WB<br>Outdoor: 95°F DB/75°F WB |

### PERFORMANCE of Heating

| Heating (Btu/hr)                                              |                                                     |
|---------------------------------------------------------------|-----------------------------------------------------|
| 1. @ 47°F Rated                                               | 60000                                               |
| 1. @ 47°F Min/Max Capacity                                    | 11800~67000                                         |
| 2. @ 17°F Rated                                               | 40000                                               |
| 3. @ 5°F Rated: Capacity / COP                                | 40000/2.20                                          |
| 3. @ 5°F Max: Capacity                                        | 40000                                               |
| Standard Operating Range(*F/*C)                               | -13~75(-25 ~ 24)                                    |
| 1. Rated Heating Conditions:                                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 47°F DB/43°F WB |
| 2. Rated Heating Conditions:                                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 17°F DB/15°F WB |
| 3. Heating Conditions, Compressor Operating at Max. Frequency | Indoor: 70°F DB/60°F WB<br>Outdoor: 5°F DB/5°F WB   |

### ELECTRICAL


|                                  |                                       |
|----------------------------------|---------------------------------------|
| Power Supply                     | 208/230V,60Hz,1Ph                     |
| System MCA                       | 42                                    |
| Connection Wiring                | 14/4                                  |
| System MOC                       | 45                                    |
| Compressor RLA                   | 25                                    |
| Outdoor Fan Motor RLA            | 2.2                                   |
| Outdoor Fan Motor W              | 85                                    |
| Indoor Fan Motor RLA             | 4                                     |
| Indoor Fan Motor W               | 560                                   |
| System Power Input @ Cooling (W) | 5800 (1200 ~ 6780)                    |
| System Power Input @ Heating (W) | 4750 (775 ~ 5170)                     |
| MCA: Min. circuit amps (A)       | MOC: Max. over current protection (A) |
| RLA: Rated load amps (A)         | W: Fan motor rated output (W)         |

### PIPING

|                                               |                    |
|-----------------------------------------------|--------------------|
| Throttle type(Indoor)                         | N/A                |
| Throttle type(Outdoor)                        | EXV+Throttle valve |
| Liquid Size                                   | 3/8in (9.52mm)     |
| Gas Size                                      | 3/4in (19mm)       |
| Max. Piping Length(ft/m)                      | 75 (246.00)        |
| Max. Height Difference(ft/m)                  | 30 (98.40)         |
| Max. Pre-charged Length(ft/m)                 | 7.5 (24.6)         |
| Refrigerant Pre-charged Amount(oz/kg)         | 4.10 (144.62)      |
| Additional Charge of Refrigerant(oz/ft)/(g/m) | 30 (0.32)          |
| Connection Method                             | Flared             |


\*The gas valve of the outdoor unit is 5/8", 5/8" to 3/4" flare to flare connector is required for the installation.

## Indoor Unit Dimension

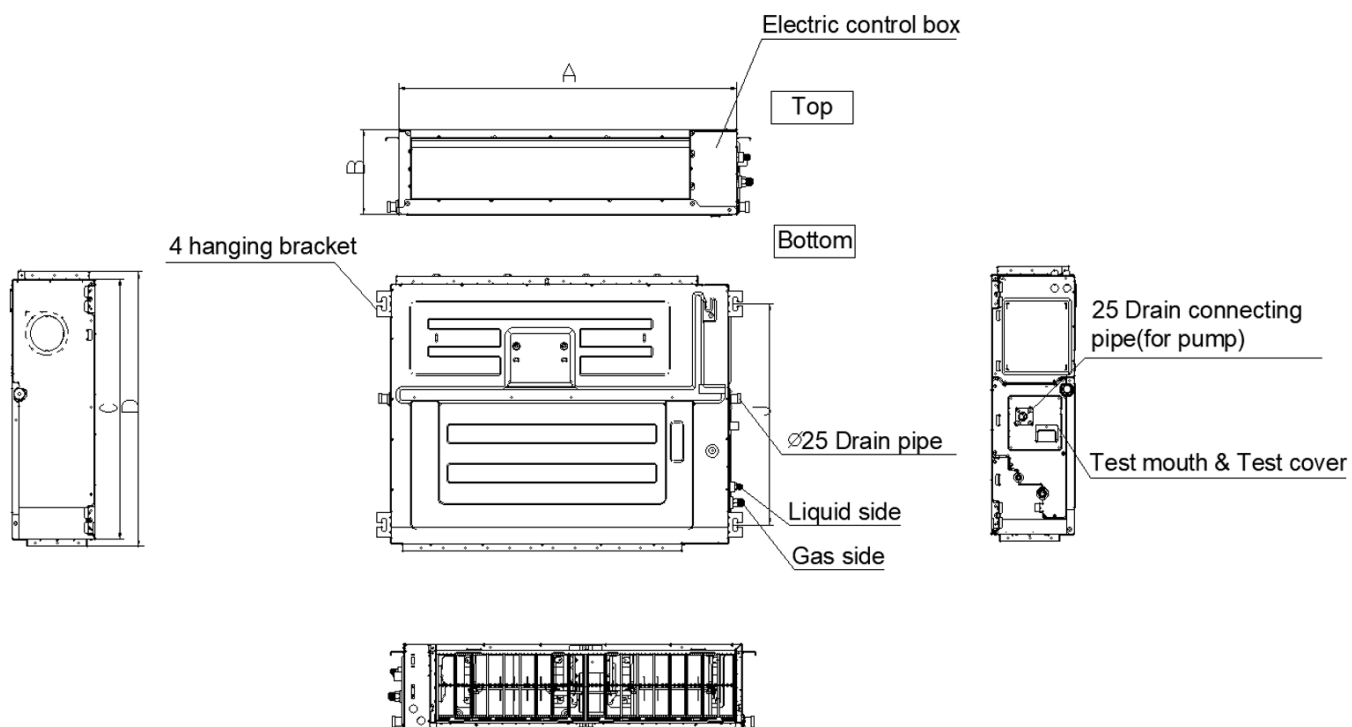


| MODEL   | A                | B               | C               | D               |
|---------|------------------|-----------------|-----------------|-----------------|
| 9K      | 27-1/2in(700mm)  | 7-7/8in(200mm)  | 17-3/4(450mm)   | 20in(506mm)     |
| 12K     | 27-1/2in(700mm)  | 9-5/8in(245mm)  | 29-1/2(750mm)   | 31-1/4in(795mm) |
| 18K~24K | 39-3/8in(1000mm) | 9-5/8in(245mm)  | 29-1/2(750mm)   | 31-1/4in(795mm) |
| 36K~48K | 47-1/8in(1200mm) | 11-7/8in(300mm) | 29-1/2(750mm)   | 31-1/4in(795mm) |
| 60K     | 55-1/8in(1400mm) | 15in(380mm)     | 31-1/2in(800mm) | 33-1/4in(845mm) |

## Outdoor Unit Dimension

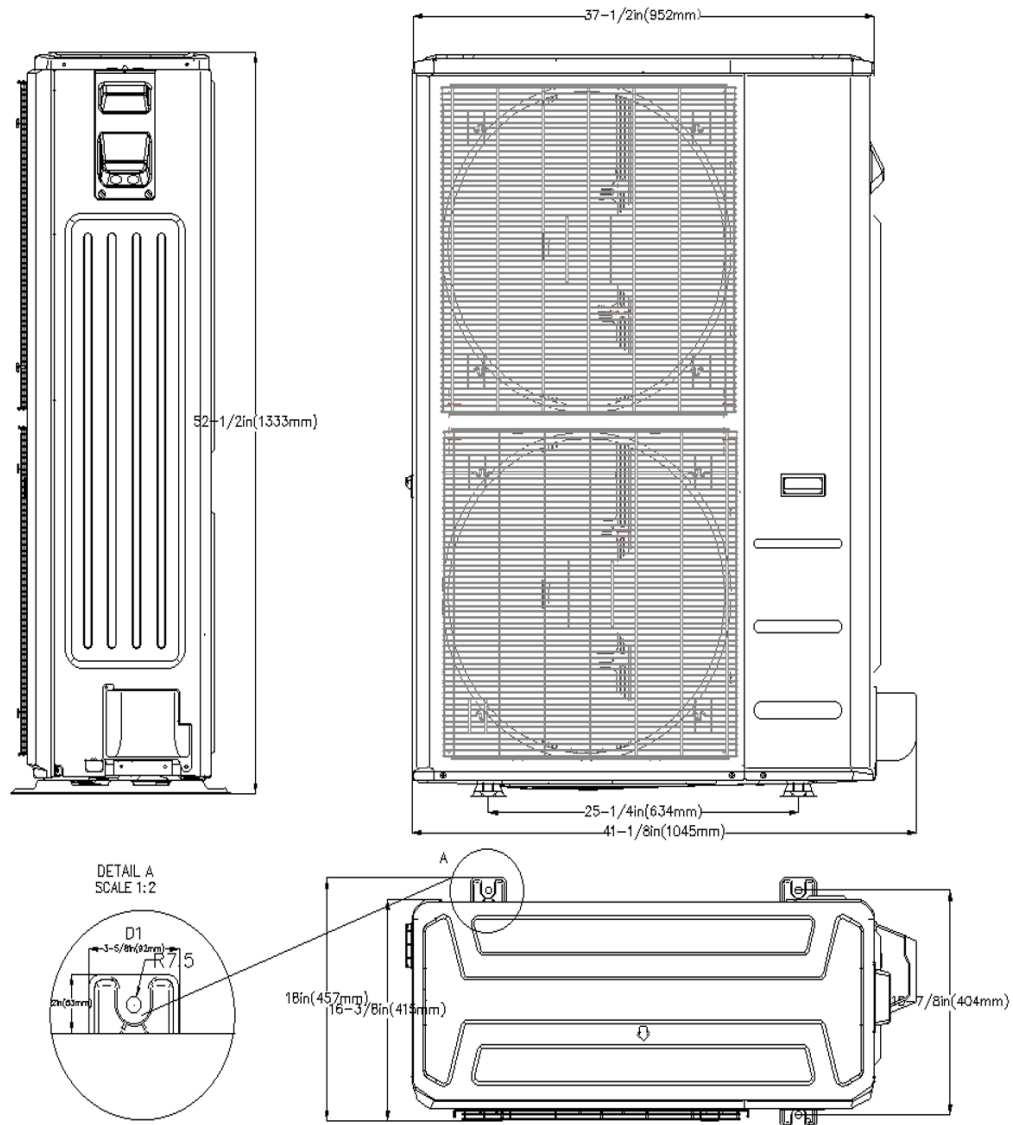

## Indoor Unit Fan Performance

Constant air volume

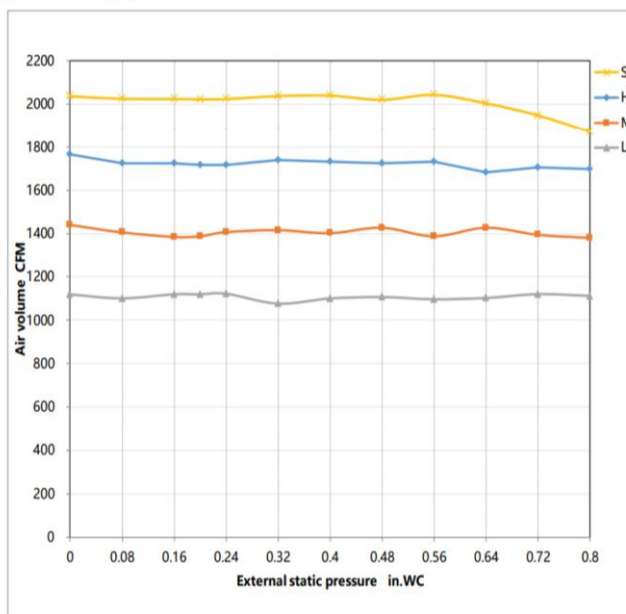

## General Features

### GENERAL FEATURES

- Compatible with both horizontal and vertical installation
- Static pressure up to 0.8 in.w.g(for all models)
- Static pressure setting stages: 8
- Refrigerant leakage detection sensor
- Constant airflow
- Built-in pump
- i-clean
- Fan speed stages: 1~100%
- WiFi capability: through wired controller with built-in WiFi
- OTA(by using wired controller 120N(X6W))
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:

### MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat\*

\*24V interface is required.