


MOU-3B18G-2

18,000 BTU Multi-Zone Outdoor Unit

Job Name:

Reference:

Date:

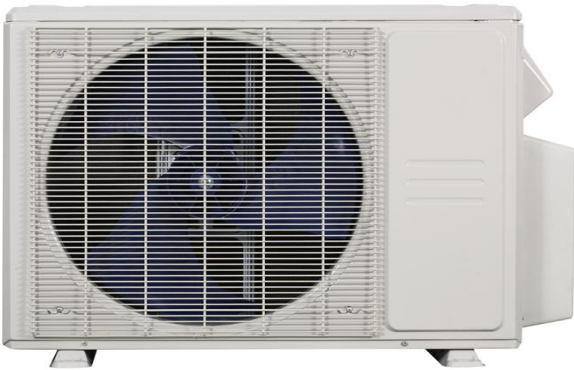

EFFICIENCY

Cooling		Heating	
SEER2	20	HSPF2-4	10.0
EER2	12	COP	3.8

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	5400~24000
Moisture Removal(L/h)	0
Standard Operating Range(°F/°C)	-13~122/(-25 ~ 50)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	19000
1. @ 47°F Min/Max Capacity	5700~22000
2. @ 17°F Rated(H32)	14600
3. @ 5°F Rated: Capacity / COP(H42)	14600/2.3
3. @ 5°F Max: Capacity	14600
Standard Operating Range(°F/°C)	-13~75/(-25 ~ 24)
1. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 5°F DB/5°F WB	

OUTDOOR SPECIFICATION

Compressor Type	Twin-ROTARY	
Compressor Model	KTN150D30UFZA	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	450	
Refrigerant Oil	V74	
Outdoor Air Flow (Max) (CFM)	1766.0	
Outdoor Noise Level (dBA)	59	
Dimension (W×D×H)	inch	35-1/16 × 13-1/2 × 26-1/2
	mm	(890 × 342 × 673)
Package (W×D×H)	inch	40-9/16 × 17-1/4 × 29-9/16
	mm	(1030 × 438 × 750)
Net/Gross Weight	lbs	101 / 110
	kg	(46 / 50)

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	16
Connection Wiring	AWG 14-4
System MOCP	20
Compressor RLA	8.2
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	1500 (400 ~ 2100)
System Power Input @ Heating (W)	1465 (350 ~ 1600)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Liquid Size	3 × 1/4in (3 × 6.35mm)
Gas Size	3 × 3/8in (3 × 9.52mm)
Max. Piping Length for all rooms(ft/m)	196.8 (60)
Max. Piping Length for one IDU(ft/m)	98.4 (30)
Max. Height Difference of IDU and ODU(ft/m)	49.2 (15)
Refrigerant Pre-charged Amount(oz/kg)	61.73 (1.75)
Refrigerant Precharge Length(ft/m)	24.6 (7.5)x3
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16 (15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32 (30)
Connection Method	Flared

Outdoor Unit Dimension

