

MOU-B24VH-4&MIU-B24V-4

24,000 BTU Multi-Positional Air Handler/Hyper Heat Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION

ESP(in.W.G)		0-0.8
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1189.0 / 1083.0 / 971.2 / 865.2 / 865.2
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		44 / 44 / 42 / 28 / 28
Dimension (W×D×H)	inch	17-9/16 × 21-1/16 × 45
	mm	(445 × 534 × 1143)
Package (W×D×H)	inch	26-5/8 × 20-7/8 × 48-5/8
	mm	(675 × 530 × 1235)
Net/Gross Weight	lbs (kgs)	106 / 128 (48 / 58)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1765.7
Outdoor Noise Level (dBA)		60
Dimension (W×D×H)	inch	35-1/16 × 13-1/2 × 26-1/2
	mm	(890 × 342 × 673)
Package (W×D×H)	inch	39-3/16 × 15-11/16 × 29-3/16
	mm	(995 × 398 × 740)
Net/Gross Weight	lbs (kgs)	103 / 110 (47 / 50)

EFFICIENCY

Cooling		Heating	
SEER2	18.3	HSPF2-4	10.0
EER2	11.7	COP	3.3

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	23000
Min/Max Capacity	7200~27000
Moisture Removal(L/h)	2.05
Standard Operating Range(*F/*C)	-22~122(-30 ~ 50)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	24000
1. @ 47°F Min/Max Capacity	7100~30000
2. @ 17°F Rated	20000
3. @ 5°F Rated: Capacity / COP	21600/1.87
3. @ 5°F Max: Capacity	21600
Standard Operating Range(*F/*C)	-22~75(-30 ~ 24)
1. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor	
Indoor: 70°F DB/60°F WB	
Operating at Max. Frequency	
Outdoor: 5°F DB/5°F WB	


ELECTRICAL

Indoor Power Supply	115 / 208 / 230V, 60Hz, 1Ph
Indoor MCA 115V/(208/230V)	5.5 / 4.0
Indoor MOP	15
Outdoor Power Supply	208 / 230V, 60Hz, 1Ph
Outdoor MCA	19
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	14
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	3
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	1965 (530 ~ 2870)
System Power Input @ Heating (W)	2112 (440 ~ 2730)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	164 (50)
Max. Height Difference(ft/m)	82 (25)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	74.08 (2.1)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.7 (65)
Connection Method	Flared

Indoor Unit Dimension

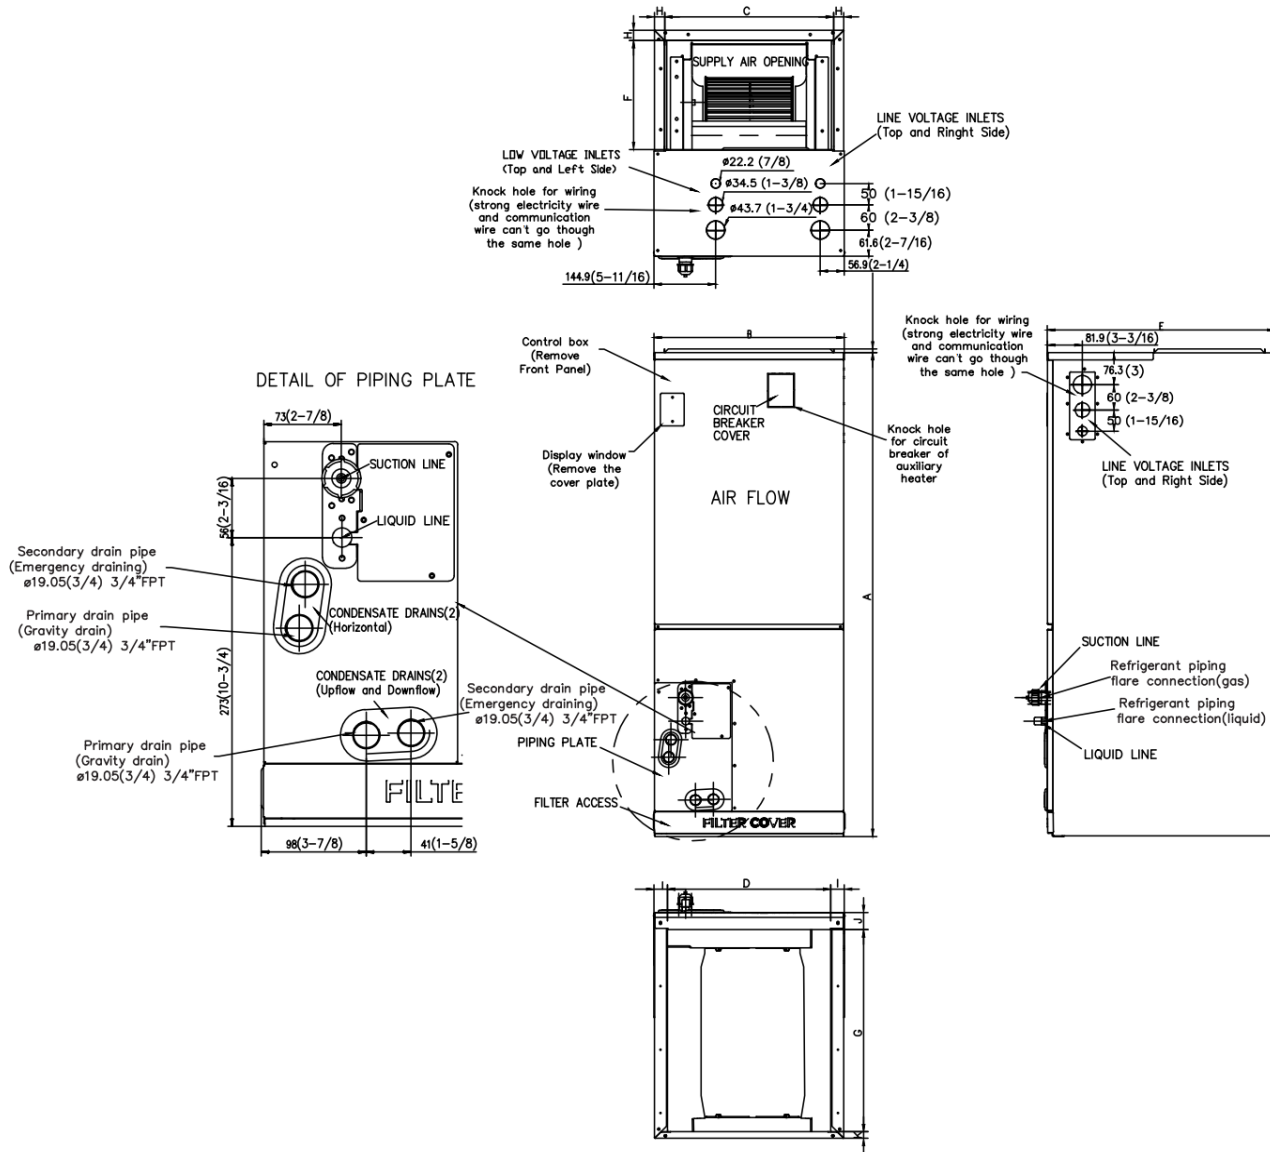



Dimensions	Model	18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Outdoor Unit Dimension

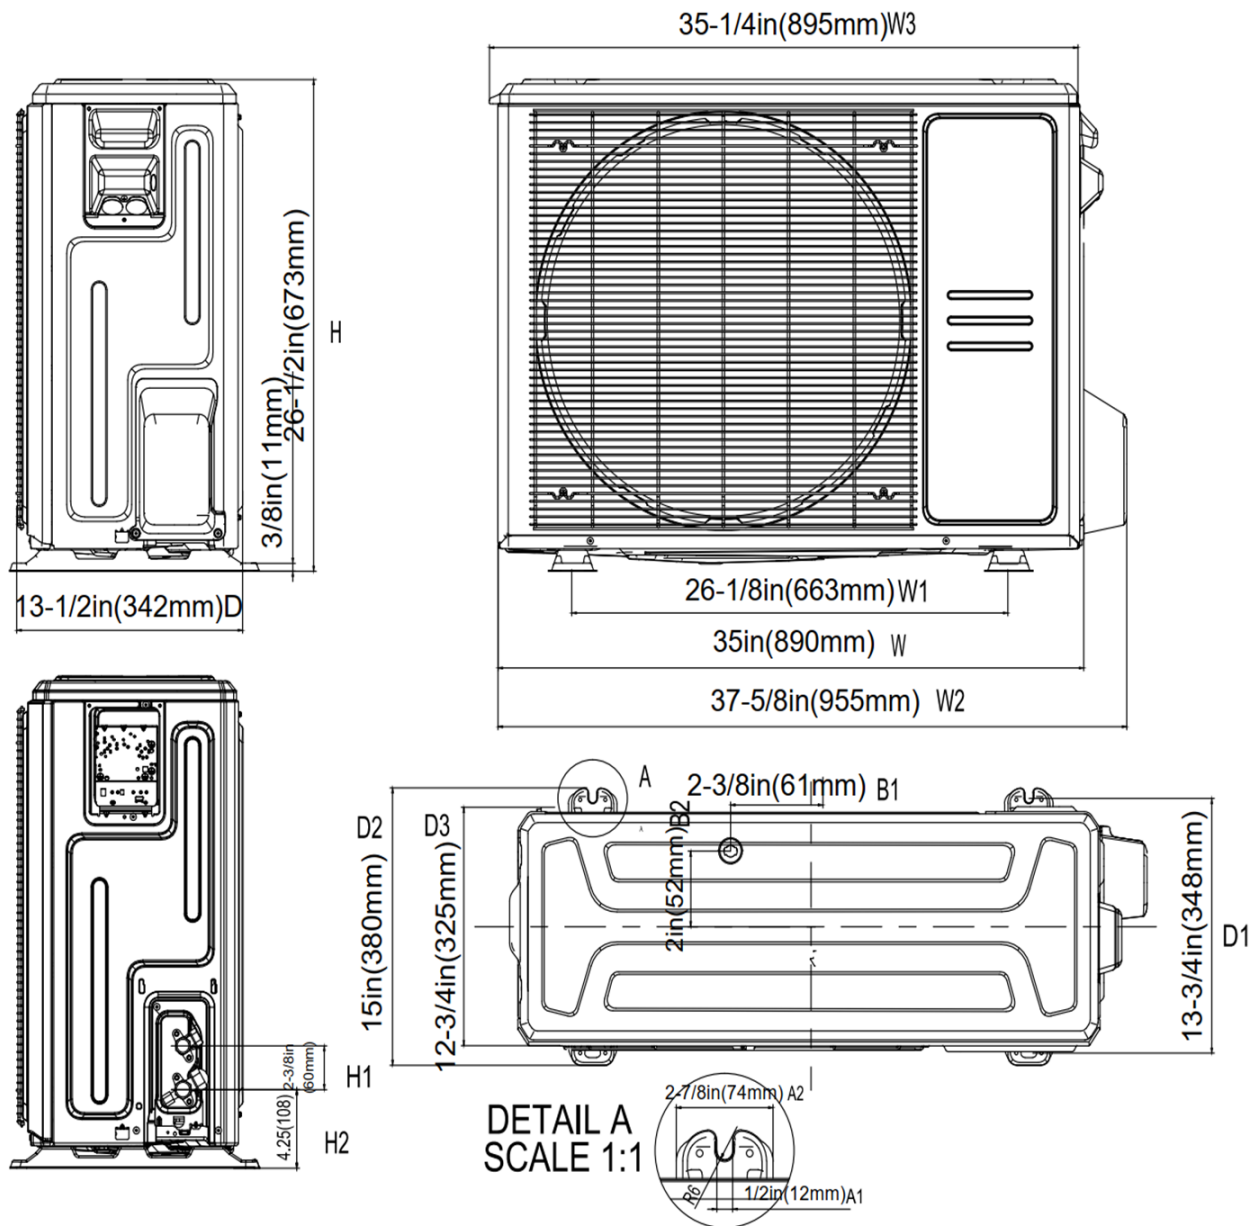

Indoor Unit Fan Performance

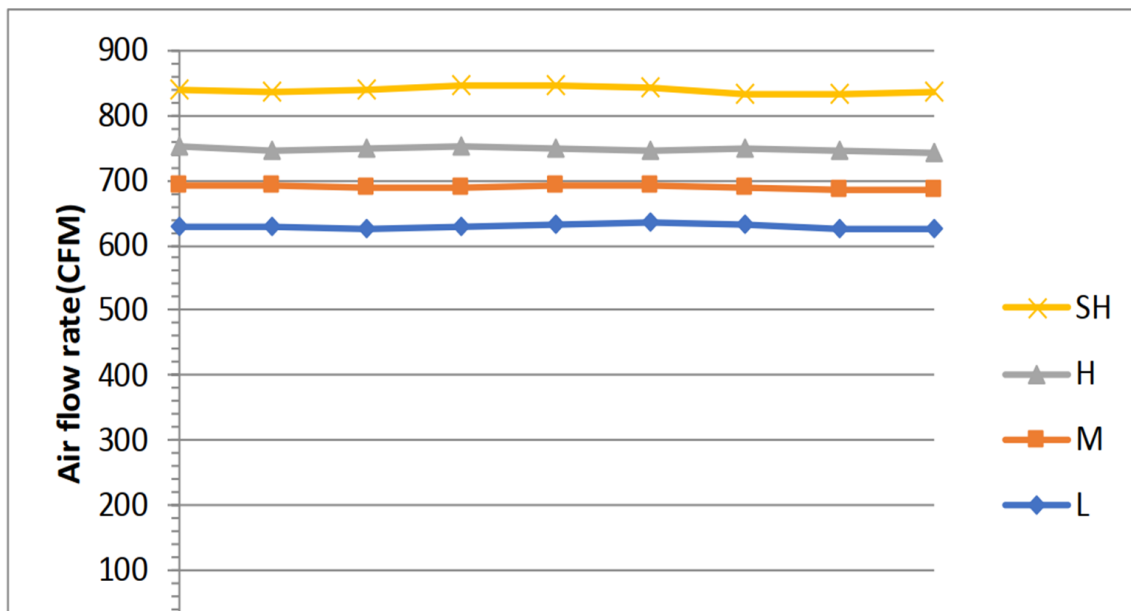

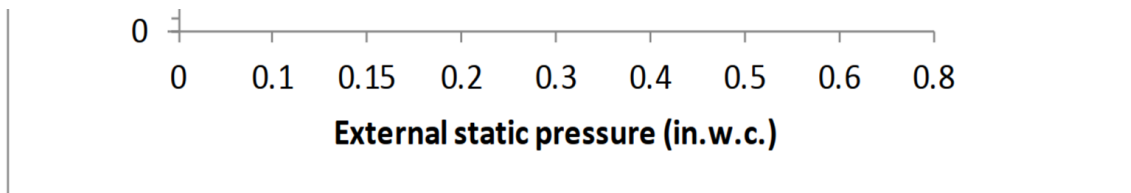

General Features

GENERAL FEATURES

- Multi-positional installation: horizontal (left or right), vertical (up or down)
- Aluminum Coil
- Constantly Air Flow system up to 0.80 in. W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency (optional)
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Adaptive Control System
- High efficiency up to 19 SEER2, 12.5 EER2, 10.3 HSPF2
- 100% heat output at -4F*
- Chassis heater and crankcase heater equipped as standard

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Wireless remote controller
- Third-Party 24V Thermostat

* For 36K model, rated cooling capacity/heating capacity at -4F=100%