

# MOU-B36LH-2&MIU-B36LF-2

36,000 BTU Floor Mounted Indoor/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:

## INDOOR SPECIFICATION

|                                           |      |                                         |
|-------------------------------------------|------|-----------------------------------------|
| Indoor Air Flow (Turbo/H/M/L/Si) (CFM)    |      | 1224.3 / 1088.9 / 988.8 / 765.2 / 653.3 |
| Indoor Noise Level (Turbo/H/M/L/Si) (dBA) |      | 51 / 51 / 45.5 / 39 / 35                |
| Dimension (W×D×H)                         | inch | 65 × 26-5/8 × 9-1/4                     |
|                                           | mm   | (1650 × 675 × 235)                      |
| Package (W×D×H)                           | inch | 67-15/16 × 29-3/4 × 12-9/16             |
|                                           | mm   | (1725 × 755 × 318)                      |
| Net/Gross Weight                          | lbs  | 89 / 105                                |
|                                           | kg   | (41 / 48)                               |

## OUTDOOR SPECIFICATION

|                              |      |                             |
|------------------------------|------|-----------------------------|
| Compressor Type              |      | TWIN-ROTARY                 |
| Compressor Model             |      | EKPQ420D1UMUA               |
| Refrigerant                  |      | R454B                       |
| Refrigerant Oil Charge(mL)   |      | 1460                        |
| Refrigerant Oil              |      | VG75                        |
| Outdoor Air Flow (Max) (CFM) |      | 3001.9                      |
| Outdoor Noise Level (dBA)    |      | 65                          |
| Dimension (W×D×H)            | inch | 38-5/8 × 16-3/8 × 38-7/16   |
|                              | mm   | (980 × 415 × 975)           |
| Package (W×D×H)              | inch | 45-1/8 × 19-11/16 × 42-9/16 |
|                              | mm   | (1145 × 500 × 1080)         |
| Net/Gross Weight             | lbs  | 207 / 238                   |
|                              | kg   | (94 / 108)                  |

## EFFICIENCY

| Cooling |      | Heating |      |
|---------|------|---------|------|
| SEER2   | 20   | HSPF2-4 | 10.8 |
| EER2    | 12.0 | COP     | 3.29 |

## PERFORMANCE of Cooling

| Cooling (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| Rated Capacity                  | 36400                                               |
| Min/Max Capacity                | 6100~38300                                          |
| Moisture Removal(L/h)           | 3.10                                                |
| Standard Operating Range(°F/°C) | -22 ~ 122(-30 ~ 50)                                 |
| Conditions:                     | Indoor: 80°F DB/67°F WB<br>Outdoor: 95°F DB/75°F WB |

## PERFORMANCE of Heating

| Heating (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| 1. @ 47°F Rated                 | 38000                                               |
| 1. @ 47°F Min/Max Capacity      | 11100~45400                                         |
| 2. @ 17°F Rated                 | 30200                                               |
| 3. @ 5°F Rated: Capacity / COP  | 39500/2.02                                          |
| 3. @ 5°F Max: Capacity          | 39500                                               |
| Standard Operating Range(°F/°C) | -22 ~ 75(-30 ~ 24)                                  |
| 1. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 47°F DB/43°F WB |
| 2. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 17°F DB/15°F WB |
| 3. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 5°F DB/5°F WB   |


## ELECTRICAL

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Power Supply                     | 208/230V,60Hz,1Ph                     |
| System MCA                       | 38                                    |
| Connection Wiring                | 14/4                                  |
| System MOC                       | 40                                    |
| Compressor RLA                   | 24.5                                  |
| Outdoor Fan Motor RLA            | 2.1                                   |
| Outdoor Fan Motor W              | 250                                   |
| Indoor Fan Motor RLA             | 1                                     |
| Indoor Fan Motor W               | 90                                    |
| System Power Input @ Cooling (W) | 3033 (590 ~ 3610)                     |
| System Power Input @ Heating (W) | 3385 (675 ~ 4070)                     |
| MCA: Min. circuit amps (A)       | MOC: Max. over current protection (A) |
| RLA: Rated load amps (A)         | W: Fan motor rated output (W)         |

## PIPING


|                                            |                    |
|--------------------------------------------|--------------------|
| Throttle type(Indoor)                      | N/A                |
| Throttle type(Outdoor)                     | EXV+Throttle valve |
| Liquid Size                                | 3/8in (9.52mm)     |
| Gas Size                                   | 3/4in (19mm)       |
| Max. Piping Length(ft/m)                   | 75 (246.00)        |
| Max. Height Difference(ft/m)               | 30 (98.40)         |
| Max. Pre-charged Length(ft/m)              | 7.5 (24.6)         |
| Refrigerant Pre-charged Amount(oz/g)       | 3.60 (126.99)      |
| Additional Refrigerant Charge(oz/ft)/(g/m) | 30 (0.32)          |
| Connection Method                          | Flared             |

## Indoor Unit Dimension

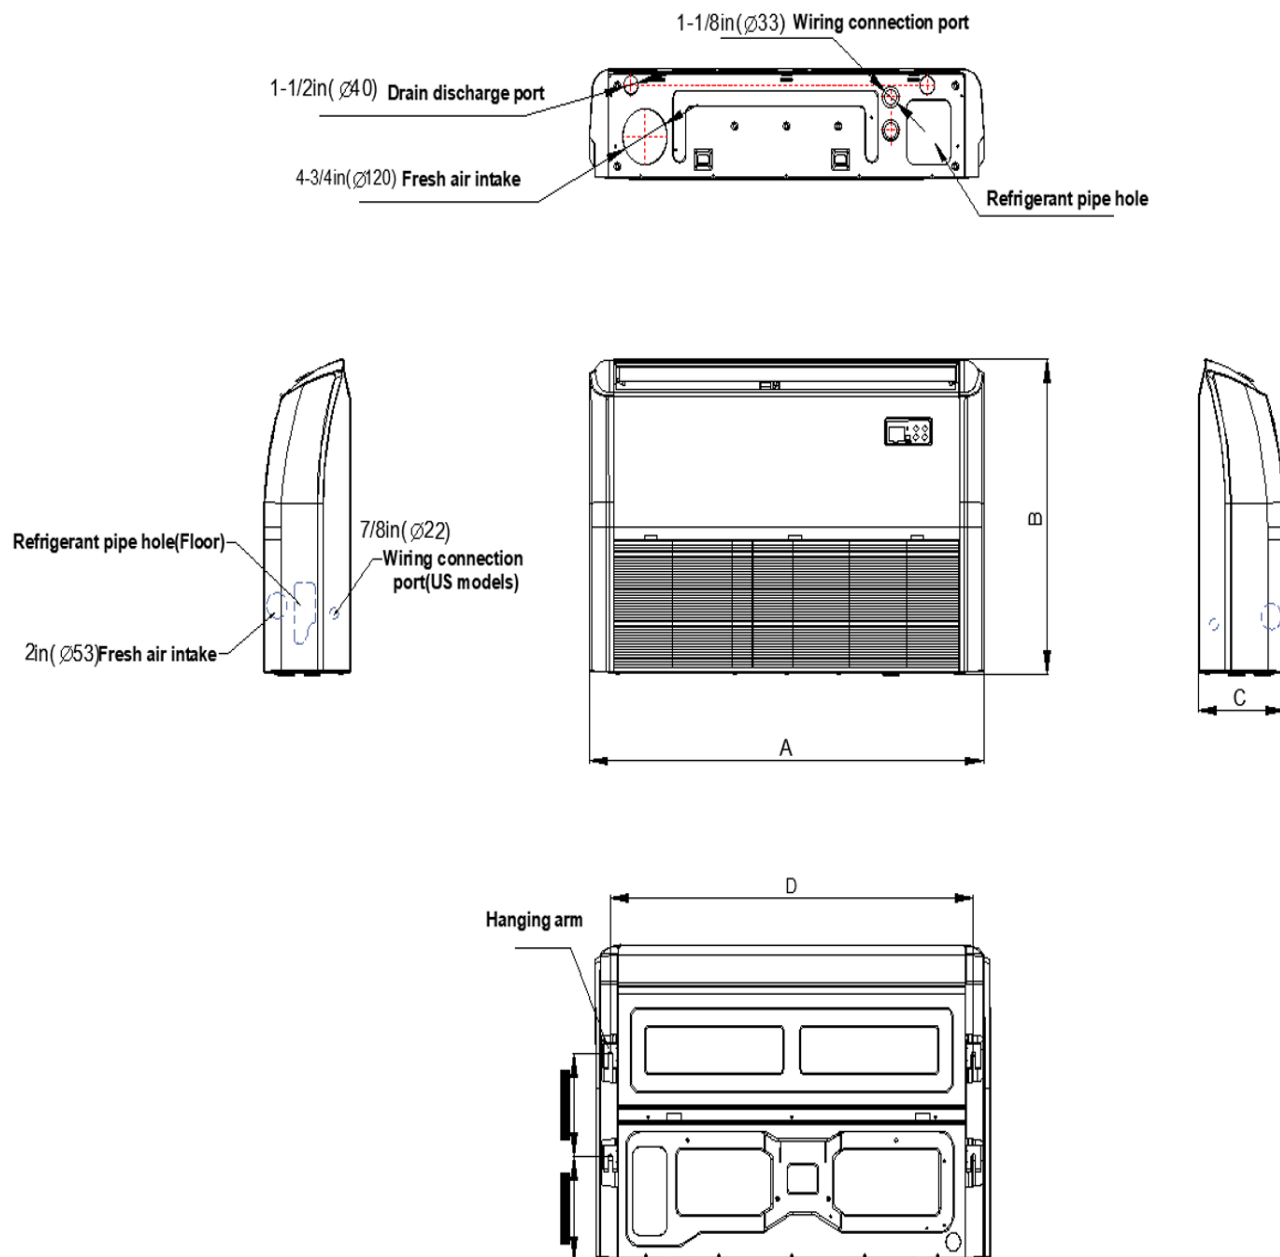

| Model       | A            | B               | C              | D                |
|-------------|--------------|-----------------|----------------|------------------|
| 18K/24K     | 42in(1068mm) | 26-1/2in(675mm) | 9-1/4in(235mm) | 38-3/4in(983mm)  |
| 36K/48K/60K | 65in(1650mm) | 26-1/2in(675mm) | 9-1/4in(235mm) | 61-5/8in(1565mm) |

## Outdoor Unit Dimension

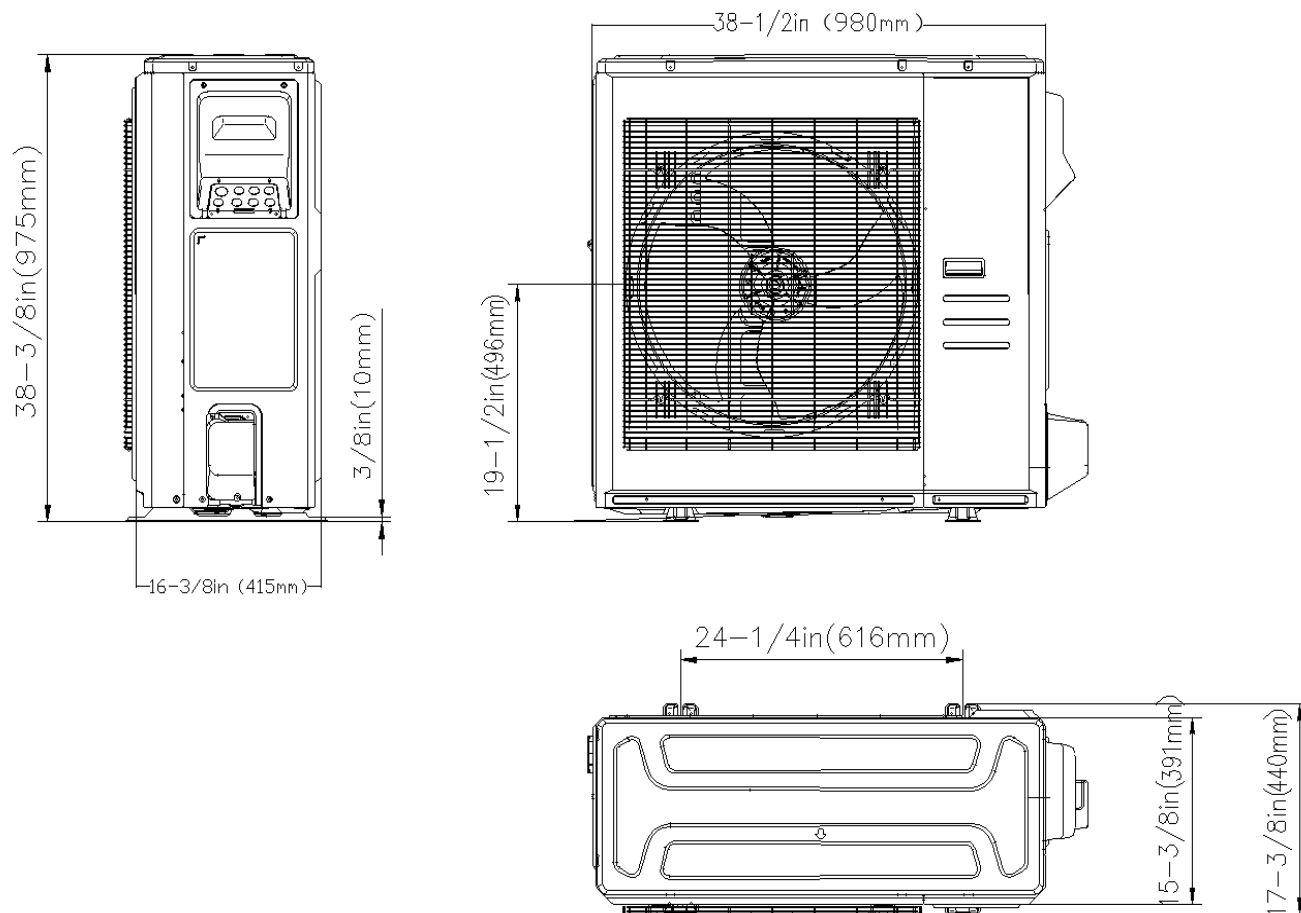

## General Features

### GENERAL FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- 88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller

### MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat

\*24V interface is required.