

# MOU-B33H-2/MIU-B33HW-2

33,000 BTU Wall Mount Indoor Unit/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



## INDOOR SPECIFICATION

|                                           |      |                                       |
|-------------------------------------------|------|---------------------------------------|
| Indoor Air Flow (Turbo/H/M/L/Si) (CFM)    |      | 829.9 / 676.9 / 529.7 / 447.3 / 447.3 |
| Indoor Noise Level (Turbo/H/M/L/Si) (dBA) |      | 56.0 / 52.5 / 46.5 / 29.5 / 23.0      |
| Dimension (W×D×H)                         | inch | 49-5/8 × 11-3/16 × 14-1/4             |
|                                           | mm   | (1259 × 283 × 362)                    |
| Package (W×D×H)                           | inch | 52-13/16 × 17-3/4 × 15-3/16           |
|                                           | mm   | (1340 × 450 × 385)                    |
| Net/Gross Weight                          | lbs  | 44 / 58                               |
|                                           | kg   | (20 / 26)                             |

## OUTDOOR SPECIFICATION

|                              |      |                              |
|------------------------------|------|------------------------------|
| Compressor Type              |      | TWIN-ROTARY                  |
| Compressor Model             |      | KTF420D62UNT                 |
| Refrigerant                  |      | R454B                        |
| Refrigerant Oil Charge(mL)   |      | 1000                         |
| Refrigerant Oil              |      | VG74                         |
| Outdoor Air Flow (Max) (CFM) |      | 2235.3                       |
| Outdoor Noise Level (dBA)    |      | 63.5                         |
| Dimension (W×D×H)            | inch | 37-1/4 × 16-3/16 × 31-15/16  |
|                              | mm   | (946 × 410 × 810)            |
| Package (W×D×H)              | inch | 42-15/16 × 19-11/16 × 34-7/8 |
|                              | mm   | (1090 × 500 × 885)           |
| Net/Gross Weight             | lbs  | 157 / 168                    |
|                              | kg   | (72 / 77)                    |

## EFFICIENCY

| Cooling |      | Heating |      |
|---------|------|---------|------|
| SEER2   | 20.0 | HSPF2-4 | 10.5 |
| EER2    | 11.7 | COP     | 3.22 |

## PERFORMANCE of Cooling

| Cooling (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| Rated Capacity                  | 33000                                               |
| Min/Max Capacity                | 15000~35900                                         |
| Moisture Removal(L/h)           | 4.5                                                 |
| Standard Operating Range(°F/°C) | -22~122(-30 ~ 50)                                   |
| Conditions:                     | Indoor: 80°F DB/67°F WB<br>Outdoor: 95°F DB/75°F WB |

## PERFORMANCE of Heating

| Heating (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| 1. @ 47°F Rated                 | 36000                                               |
| 1. @ 47°F Min/Max Capacity      | 19900~38200                                         |
| 2. @ 17°F Rated                 | 29600                                               |
| 3. @ 5°F Rated: Capacity / COP  | 34600/1.91                                          |
| 3. @ 5°F Max: Capacity          | 34600                                               |
| Standard Operating Range(°F/°C) | -22~75(-30 ~ 24)                                    |
| 1. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 47°F DB/43°F WB |
| 2. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 17°F DB/15°F WB |
| 3. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 5°F DB/5°F WB   |


## ELECTRICAL

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Power Supply                     | 208/230V,60Hz,1Ph                     |
| System MCA                       | 34                                    |
| Connection Wiring                | 14x4                                  |
| System MOC                       | 35                                    |
| Compressor RLA                   | 24.5                                  |
| Outdoor Fan Motor RLA            | 1.5                                   |
| Outdoor Fan Motor W              | 230                                   |
| Indoor Fan Motor RLA             | 1.6                                   |
| Indoor Fan Motor W               | 58                                    |
| System Power Input @ Cooling (W) | 2821 (440 ~ 3450)                     |
| System Power Input @ Heating (W) | 3277 (1245 ~ 4120)                    |
| MCA: Min. circuit amps (A)       | MOC: Max. over current protection (A) |
| RLA: Rated load amps (A)         | W: Fan motor rated output (W)         |


## PIPING

|                                            |                |
|--------------------------------------------|----------------|
| Throttle type(Indoor)                      | N/A            |
| Throttle type(Outdoor)                     | EXV            |
| Liquid Size                                | 3/8in (9.52mm) |
| Gas Size                                   | 3/4in (19mm)   |
| Max. Piping Length(ft/m)                   | 164.00 (50)    |
| Max. Height Difference(ft/m)               | 82.00 (25)     |
| Max. Pre-charged Length(ft/m)              | 24.6 (7.5)     |
| Refrigerant Pre-charged Amount(oz/g)       | 87.13 (2.47)   |
| Additional Refrigerant Charge(oz/ft)/(g/m) | 0.32 (30)      |
| Connection Method                          | Flared         |

## Indoor Unit Dimension

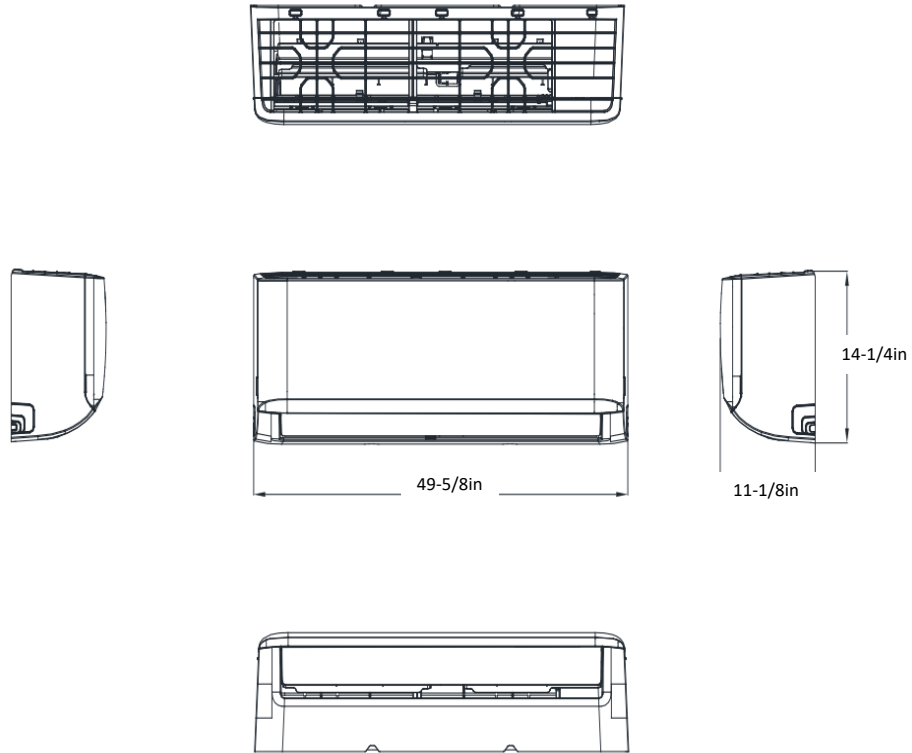


## Indoor Unit Dimensions (Blow Up)

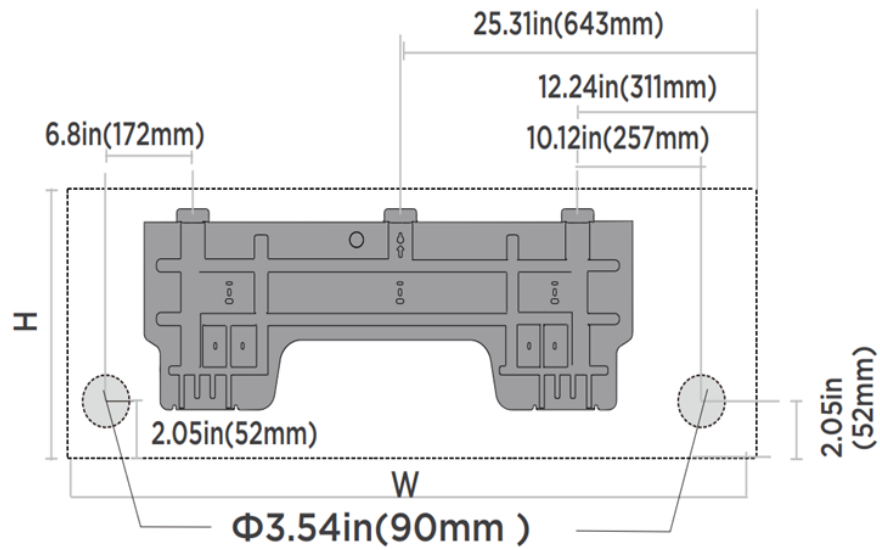

**Indoor unit dimensions(WxH):**

$49.57\text{in}(1259\text{mm})\times 14.25\text{in}(362\text{mm})$

## Outdoor Unit Dimension

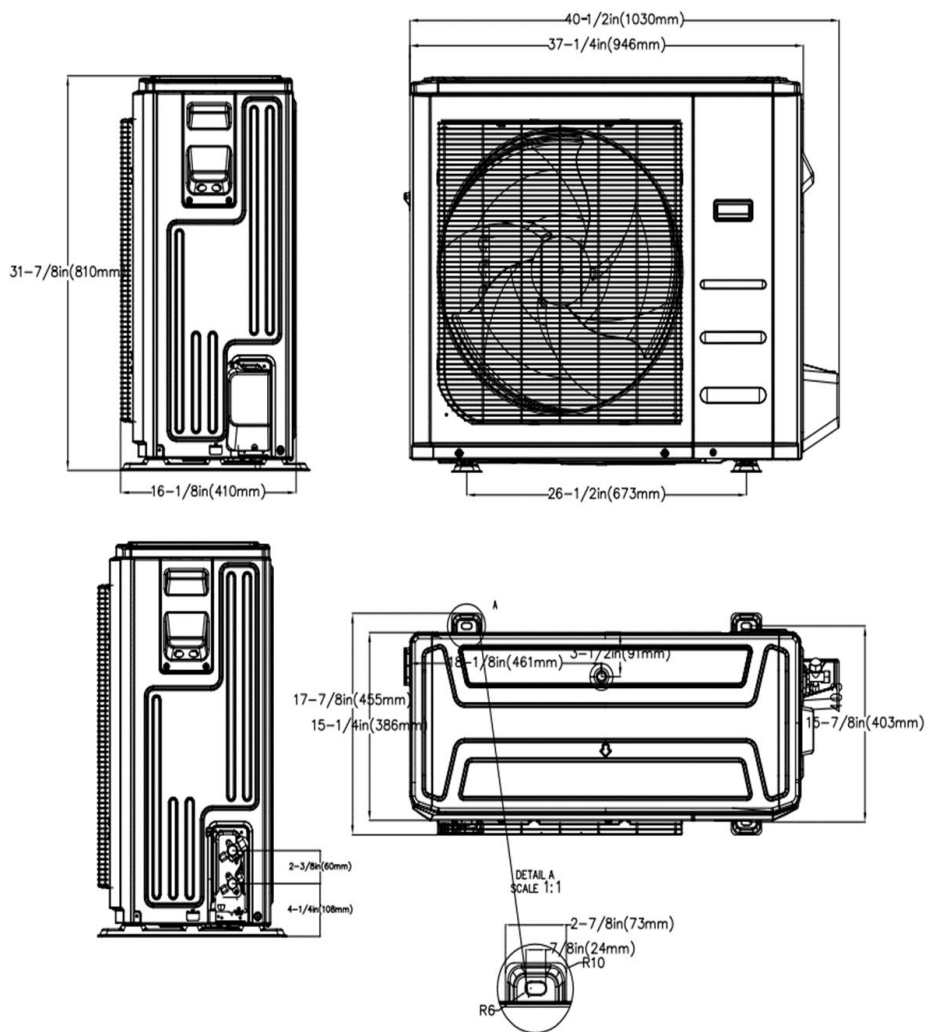

## General Features

### GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

### MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat\*

\*24V interface is required.