

MOU-B30VH-4&MIU-B30V-4

30,000 BTU Multi-Positional Air Handler/Hyper Heat Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION		
ESP(in.W.G)		0-0.8
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		988.8 / 894.7 / 806.4 / 712.2 / 712.2
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		47 / 46 / 43 / 27.5 / 27.5
Dimension (W×D×H)	inch	21-1/16 × 21-1/16 × 49-1/16
	mm	(534 × 534 × 1245)
Package (W×D×H)	inch	26-5/8 × 24-7/16 × 52-9/16
	mm	(675 × 620 × 1335)
Net/Gross Weight	lbs (kgs)	129 / 154 (59 / 70)

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		MTH356UKRC8FQL
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1300
Refrigerant Oil		HAF68D1A
Outdoor Air Flow (Max) (CFM)		3001.8
Outdoor Noise Level (dBA)		60.5
Dimension (W×D×H)	inch	37-1/4 × 16-3/16 × 31-15/16
	mm	(946 × 410 × 810)
Package (W×D×H)	inch	42-15/16 × 19-11/16 × 34-7/8
	mm	(1090 × 500 × 885)
Net/Gross Weight	lbs (kgs)	165 / 175 (75 / 80)

EFFICIENCY			
Cooling		Heating	
SEER2	16.8	HSPF2-4	10.0
EER2	11.7	COP	3.7


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	30000
Min/Max Capacity	12800~39000
Moisture Removal(L/h)	2.77
Standard Operating Range(°F/°C)	-22~122(-30 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	34000
1. @ 47°F Min/Max Capacity	10300~38500
2. @ 17°F Rated	23800
3. @ 5°F Rated: Capacity / COP	32600/1.96
3. @ 5°F Max: Capacity	32600
Standard Operating Range(°F/°C)	-22~75(-30 ~ 24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL	
Indoor Power Supply	115 / 208 / 230V, 60Hz, 1Ph
Indoor MCA 115V/(208/230V)	8.0 / 6.0
Indoor MOP	15
Outdoor Power Supply	208 / 230V, 60Hz, 1Ph
Outdoor MCA	29.5
Outdoor MOP	30
Communication Wiring	AWG 20-2
Compressor RLA	22.4
Outdoor Fan Motor RLA	1.5
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	4.5
Indoor Fan Motor W	375
System Power Input @ Cooling (W)	2567 (850 ~ 3620)
System Power Input @ Heating (W)	2790 (655 ~ 3020)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	164 (50)
Max. Height Difference(ft/m)	82 (25)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	105.82 (3)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.7 (65)
Connection Method	Flared

Indoor Unit Dimension

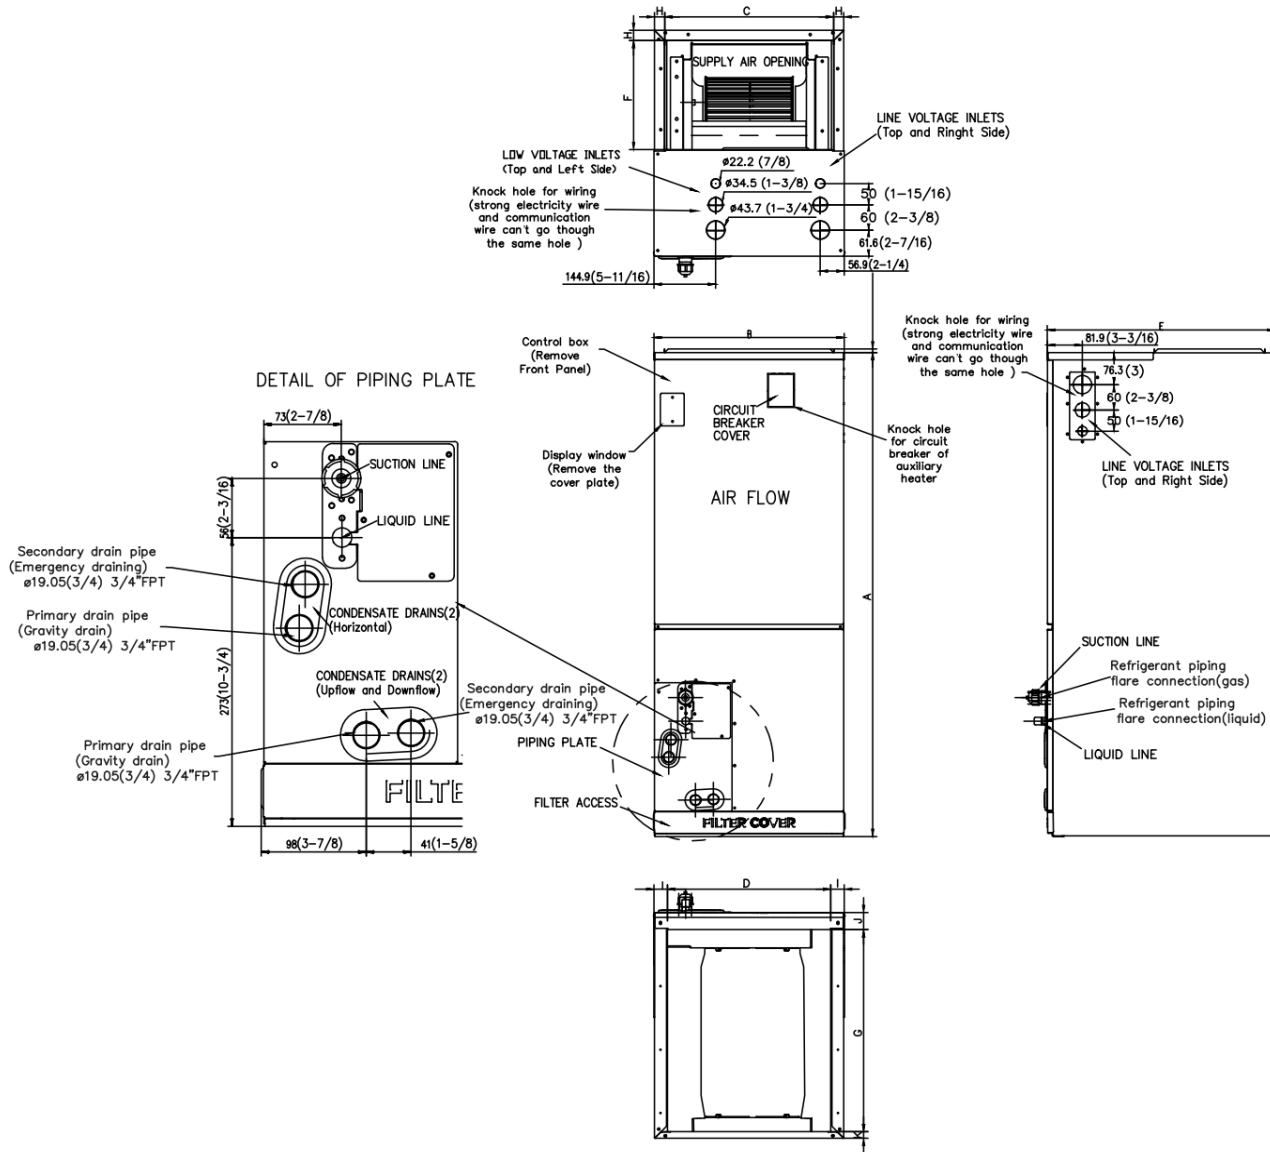



Dimensions	Model	18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Outdoor Unit Dimension

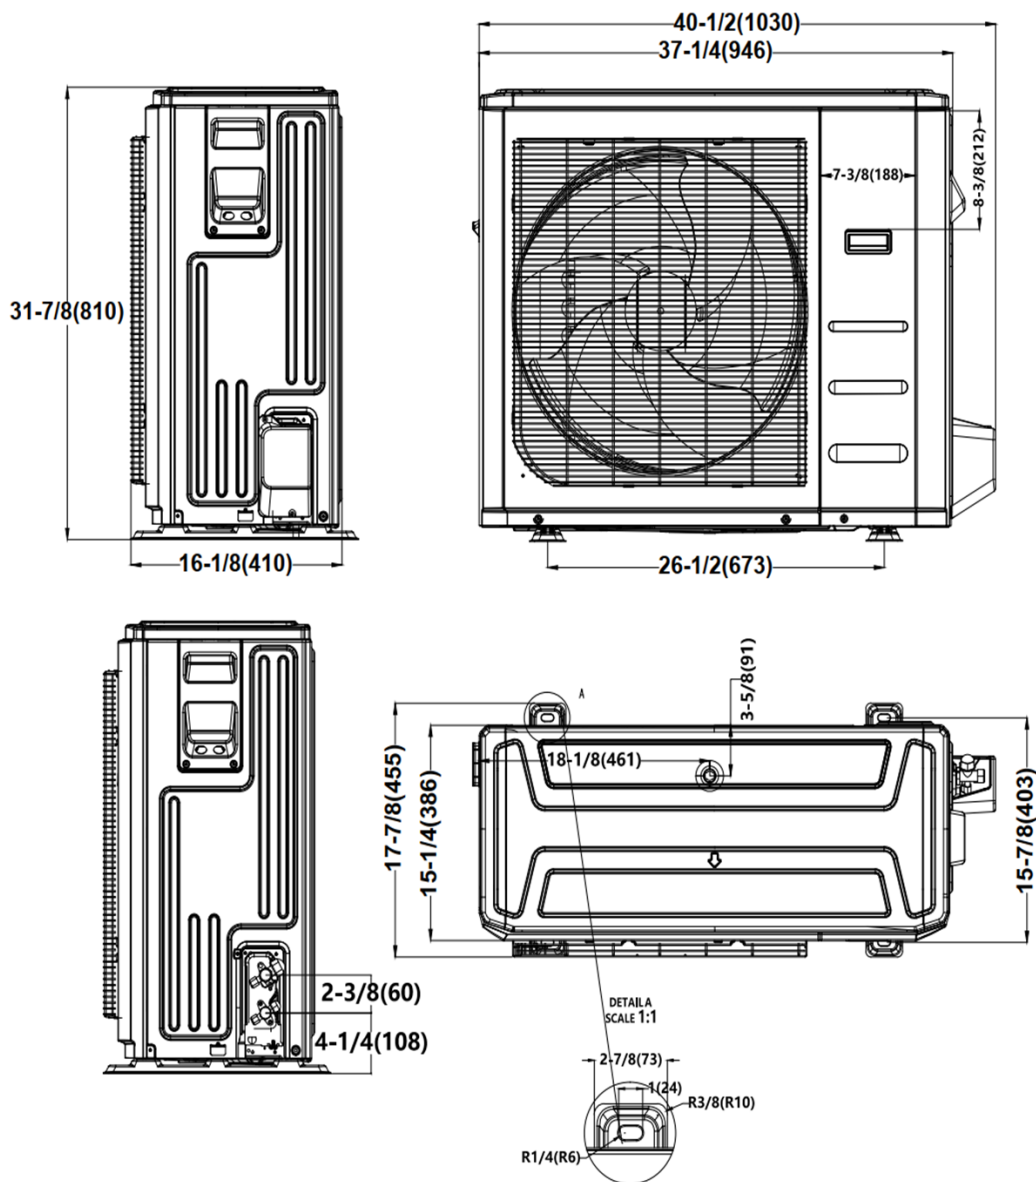

Indoor Unit Fan Performance

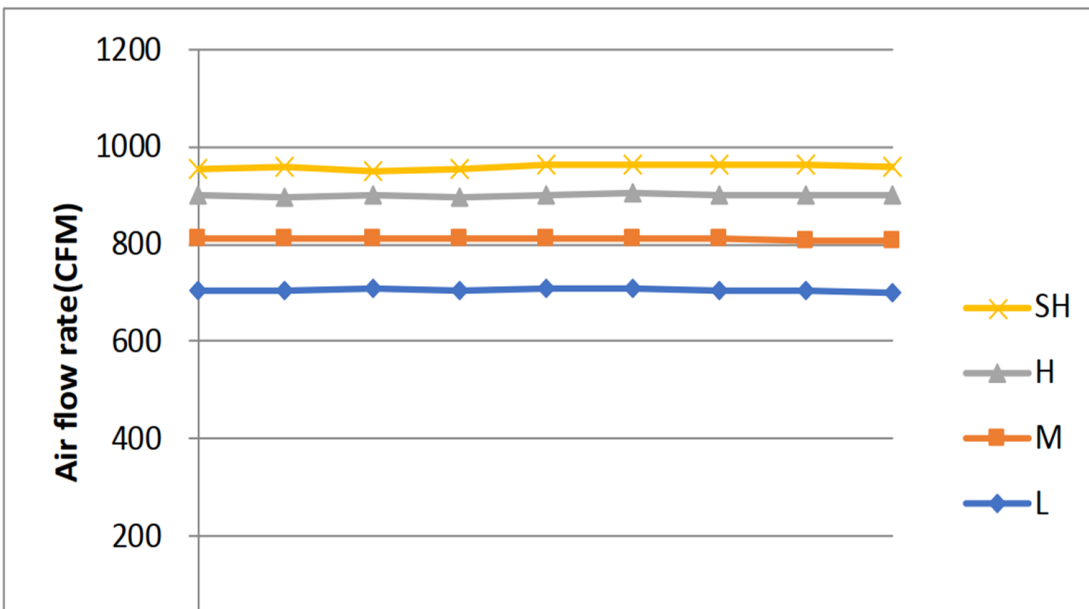

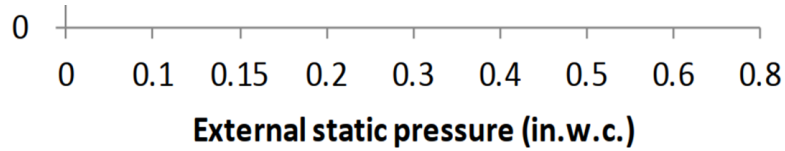

General Features

GENERAL FEATURES

- Multi-positional installation: horizontal (left or right), vertical (up or down)
- Aluminum Coil
- Constantly Air Flow system up to 0.80 in. W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency (optional)
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Adaptive Control System
- High efficiency up to 19 SEER2, 12.5 EER2, 10.3 HSPF2
- 100% heat output at -4F*
- Chassis heater and crankcase heater equipped as standard

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Wireless remote controller
- Third-Party 24V Thermostat

* For 36K model, rated cooling capacity/heating capacity at -4F=100%