

MOU-B36L-2&MIU-B36LC-2

36,000 BTU 4-Way Cassette Indoor Unit/Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1041.8 / 947.6 / 853.5 / 753.4 / 659.2
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54 / 52.5 / 47.0 / 39.5 / 36.5
Dimension (W×D×H)	inch	32-11/16 × 32-11/16 × 9-11/16
	mm	(830 × 830 × 245)
Package (W×D×H)	inch	35-7/8 × 35-7/8 × 11-7/16
	mm	(910 × 910 × 290)
Net/Gross Weight	lbs	60 / 72
	kg	(27 / 33)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTF310D43UMT
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1000
Refrigerant Oil		2765
Outdoor Air Flow (Max) (CFM)		2413.3
Outdoor Noise Level (dBA)		63
Dimension (W×D×H)	inch	37-1/4 × 16-3/16 × 31-15/16
	mm	(946 × 410 × 810)
Package (W×D×H)	inch	42-15/16 × 19-11/16 × 34-7/8
	mm	(1090 × 500 × 885)
Net/Gross Weight	lbs	153 / 163
	kg	(70 / 74)

EFFICIENCY

Cooling		Heating	
SEER2	20	HSPF2-4	10.3
EER2	9.6	COP	3.3

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	6400~39800
Moisture Removal(L/h)	4.23
Standard Operating Range(°F/°C)	-13~122(-25 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	38000
1. @ 47°F Min/Max Capacity	14400~42200
2. @ 17°F Rated	26800
3. @ 5°F Rated: Capacity / COP	26600/2.20
3. @ 5°F Max: Capacity	26600
Standard Operating Range(°F/°C)	-13~75(-25 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	33
Connection Wiring	14x3
System MOCP	35
Compressor RLA	21.5
Outdoor Fan Motor RLA	1.4
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1
Indoor Fan Motor W	125
System Power Input @ Cooling (W)	3720 (560 ~ 4360)
System Power Input @ Heating (W)	3365 (840 ~ 3580)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Max. Piping Length(ft/m)	75 (246.00)
Max. Height Difference(ft/m)	30 (98.40)
Max. Pre-charged Length(ft/m)	7.5 (24.6)
Refrigerant Pre-charged Amount(oz/g)	2.60 (91.71)
Additional Refrigerant Charge(oz/ft)/(g/m)	30 (0.32)
Connection Method	Flared

Indoor Unit Dimension

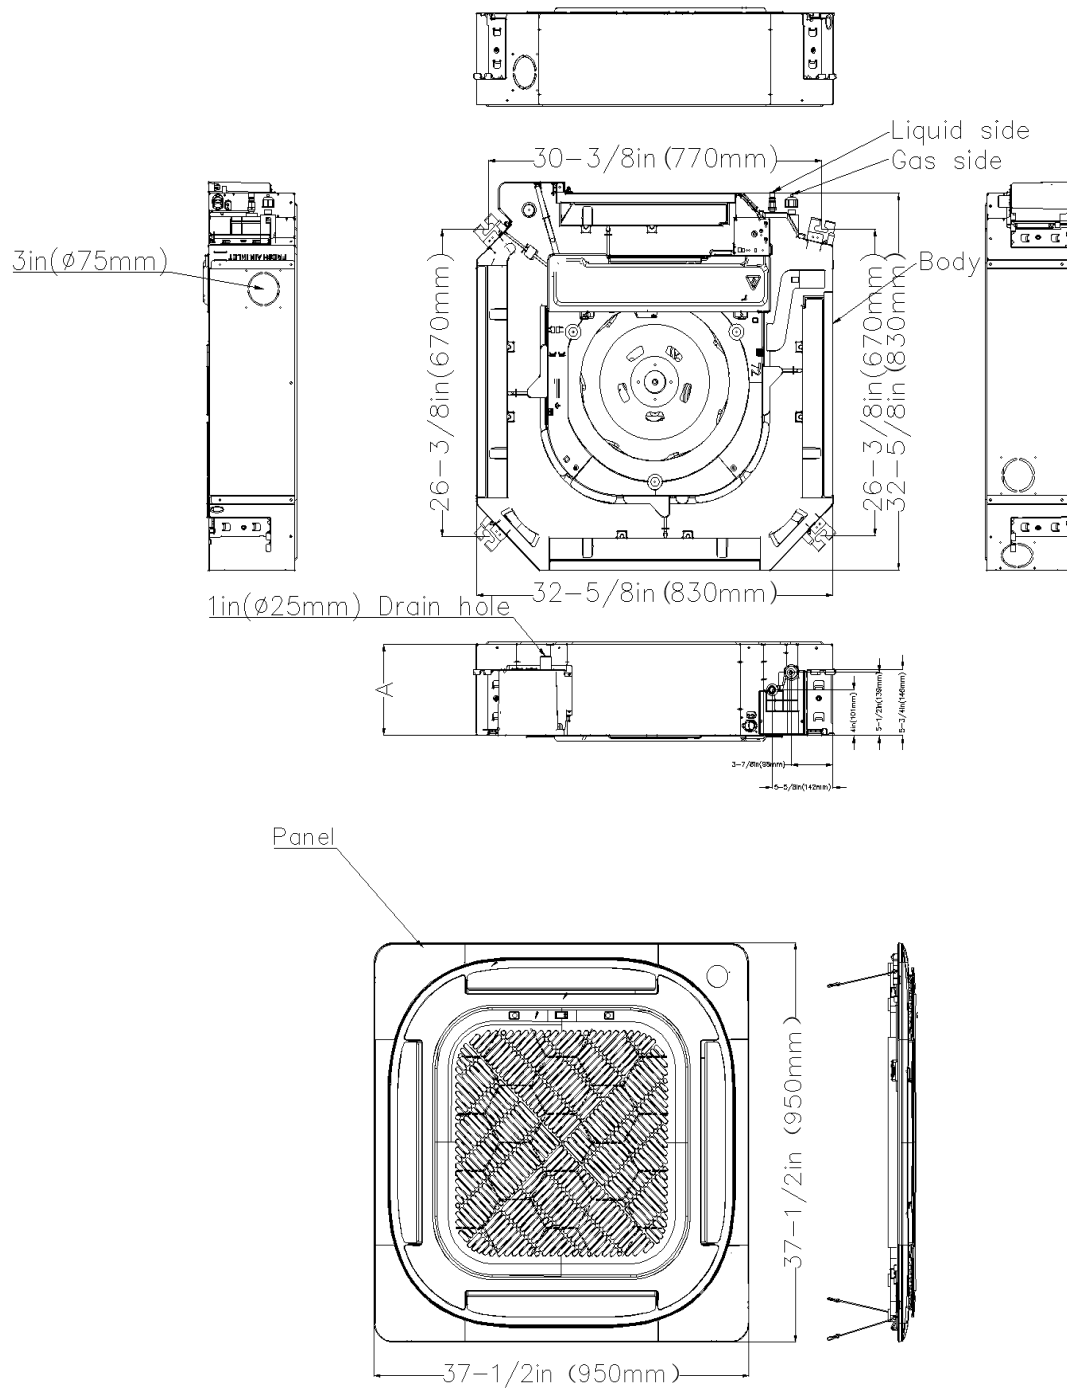

Outdoor Unit Dimension

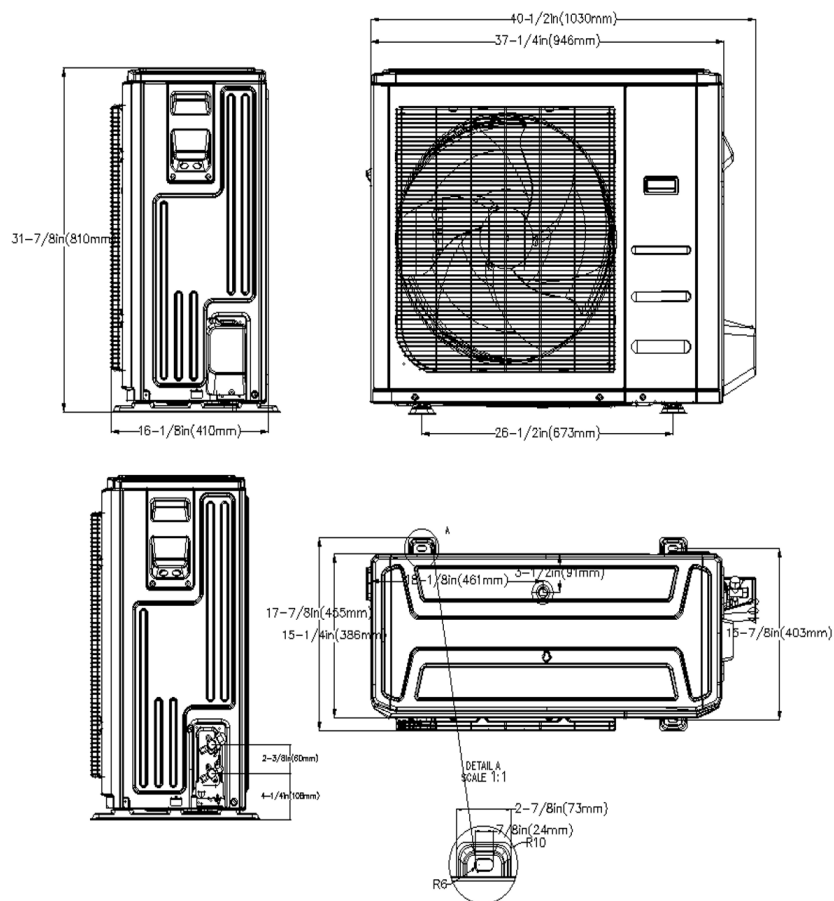

General Features

GENERAL FEATURES

- 360° Air Flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor (Optional)
- Humidity sensor
- Built-in pump
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat

*24V interface is required.