


MIU-B18CO-2

18,000 BTU 1-Way Cassette Indoor Unit

Job Name:	
Reference:	Date:

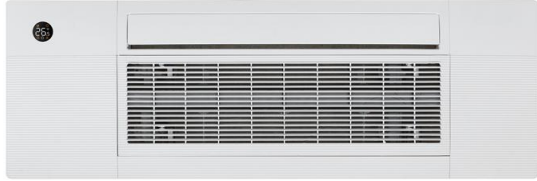

Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	16700
Heating Capacity	Btu/hr	20000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	1/4" (6.35mm)
Gas Side	inch(mm)	1/2" (12.7mm)
Drain Pipe Size	inch(mm)	1" (25mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	3
Indoor Fan Motor Model	-	ZKFN-30-8-43
Indoor Fan Motor Output	W	30
Indoor Fan Motor RLA	A	1.2
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	1344 / 1184 / 1024

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	400 / 352 / 300 / 207 / 207
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	44 / 44 / 41.5 / 31 / 26
Dimension (W×D×H)	inch	50-1/4 × 13-1/4 × 9
	mm	(1278 × 335 × 228)
Package (W×D×H)	inch	57-5/8 × 22-1/2 × 22-5/8
	mm	(1463 × 571 × 575)
Net Weight / Gross Weight	lbs	45 / 82
	kg	20.5 / 37.6

Indoor Unit Dimensions

