

MIU-B24V-2

24,000 BTU AHU Indoor Unit

Job Name:

Reference:

Date:




Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	23000
Heating Capacity	Btu/hr	26000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	3/8" (9.52mm)
Gas Side	inch(mm)	5/8" (15.9mm)
Drain Pipe Size	inch(mm)	3/4" (19mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	4
Indoor Fan Motor Model	-	ZKFD-250-8-1
Indoor Fan Motor Output	W	250
Indoor Fan Motor RLA	A	3
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	810 / 700 / 450

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	824 / 759 / 695 / 630 / 630
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	44 / 44 / 42 / 29 / 29
Dimension (W×D×H)	inch	21 × 17-1/2 × 45
	mm	(534 × 445 × 1143)
Package (W×D×H)	inch	26-1/2 × 20-7/8 × 48-5/8
	mm	(675 × 530 × 1235)
Net Weight / Gross Weight	lbs	104 / 126
	kg	47.3 / 57.1

Indoor Unit Dimensions

Unit: inch(mm)

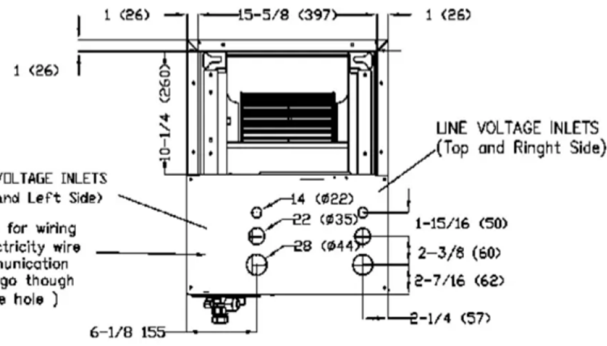

DETAIL OF PIPING PLATE

