

MIU-B36V-2

36,000 BTU AHU Indoor Unit

Job Name:

Reference:

Date:




Item	Unit	Specification
Performance Data		
Cooling Capacity	Btu/hr	36000
Heating Capacity	Btu/hr	38000
Design Pressure	PSIG	550 / 340
Refrigerant Type	-	R454b
Liquid Side	inch(mm)	3/8" (9.52mm)
Gas Side	inch(mm)	5/8" (15.9mm)
Drain Pipe Size	inch(mm)	3/4" (19mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)

Electrical		
Normal Operational Voltage	V, Ph, Hz	208/230V, 1Ph, 60Hz
Voltage Range	V	187-253
Connection Wiring	-	AWG 14/4
MCA	A	6
Indoor Fan Motor Model	-	ZKFD-375-8-1-1
Indoor Fan Motor Output	W	375
Indoor Fan Motor RLA	A	4.5
Indoor Fan Motor Speed (Hi/Mi/Lo)	r/min	880 / 700 / 500

Air Flow & Noise Level		
Indoor Air Flow (H/M/L) (CFM)	CFM	618 / 577 / 530 / 489 / 489
Indoor Noise Flow (H/M/L) (dB(A))	dB(A)	42 / 42 / 40 / 33 / 33
Dimension (W×D×H)	inch	21 × 17-1/2 × 45
	mm	(534 × 445 × 1143)
Package (W×D×H)	inch	26-1/2 × 20-7/8 × 48-5/8
	mm	(675 × 530 × 1235)
Net Weight / Gross Weight	lbs	128 / 154
	kg	58 / 69.9

Indoor Unit Dimensions

Unit: inch(mm)

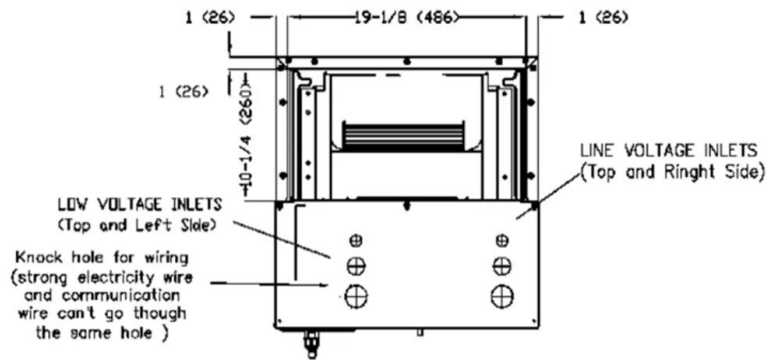

DETAIL OF PIPING PLATE

