

MOU-B09G-2/MIU-B09GW-2

9,000 BTU Wall-Mount Indoor/Heat Pump Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		306.1 / 247.2 / 176.6 / 141.3 / 141.3
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		43 / 38.5 / 33 / 24 / 19.5
Dimension (W×D×H)	inch	28-3/4 × 7-7/8 × 11-1/2
	mm	(729 × 200 × 292)
Package (W×D×H)	inch	31-1/8 × 10-11/16 × 14-13/16
	mm	(790 × 270 × 375)
Net/Gross Weight	lbs	19 / 24
	kg	(9 / 11)

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KSK103D33UEZ3
Refrigerant		R454B
Refrigerant Oil Charge(mL)		310
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1294.1
Outdoor Noise Level (dBA)		53.5
Dimension (W×D×H)	inch	30-1/8 × 11-15/16 × 21-7/8
	mm	(765 × 303 × 555)
Package (W×D×H)	inch	34-15/16 × 13-1/4 × 24-1/16
	mm	(887 × 337 × 610)
Net/Gross Weight	lbs	55 / 60
	kg	(25 / 28)

EFFICIENCY			
Cooling		Heating	
SEER2	21.6	HSPF2-4	9.4
EER2	12.6	COP	3.27


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	9000
Min/Max Capacity	2900~10500
Moisture Removal(L/h)	0.9
Standard Operating Range(°F/°C)	5~122(-15 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	10000
1. @ 47°F Min/Max Capacity	2400~11200
2. @ 17°F Rated	6600
3. @ 5°F Rated: Capacity / COP	7000/2.00
3. @ 5°F Max: Capacity	7000
Standard Operating Range(°F/°C)	5~75(-15 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB


ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	12
Connection Wiring	14x4
System MOCP	15
Compressor RLA	7
Outdoor Fan Motor RLA	0.3
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.3
Indoor Fan Motor W	20
System Power Input @ Cooling (W)	714 (300 ~ 880)
System Power Input @ Heating (W)	896 (320 ~ 1100)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	Capillary
Liquid Size	1/4in (6.35mm)
Gas Size	3/8in (9.52mm)
Max. Piping Length(ft/m)	82.00 (25)
Max. Height Difference(ft/m)	49.20 (15)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	21.52 (0.61)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

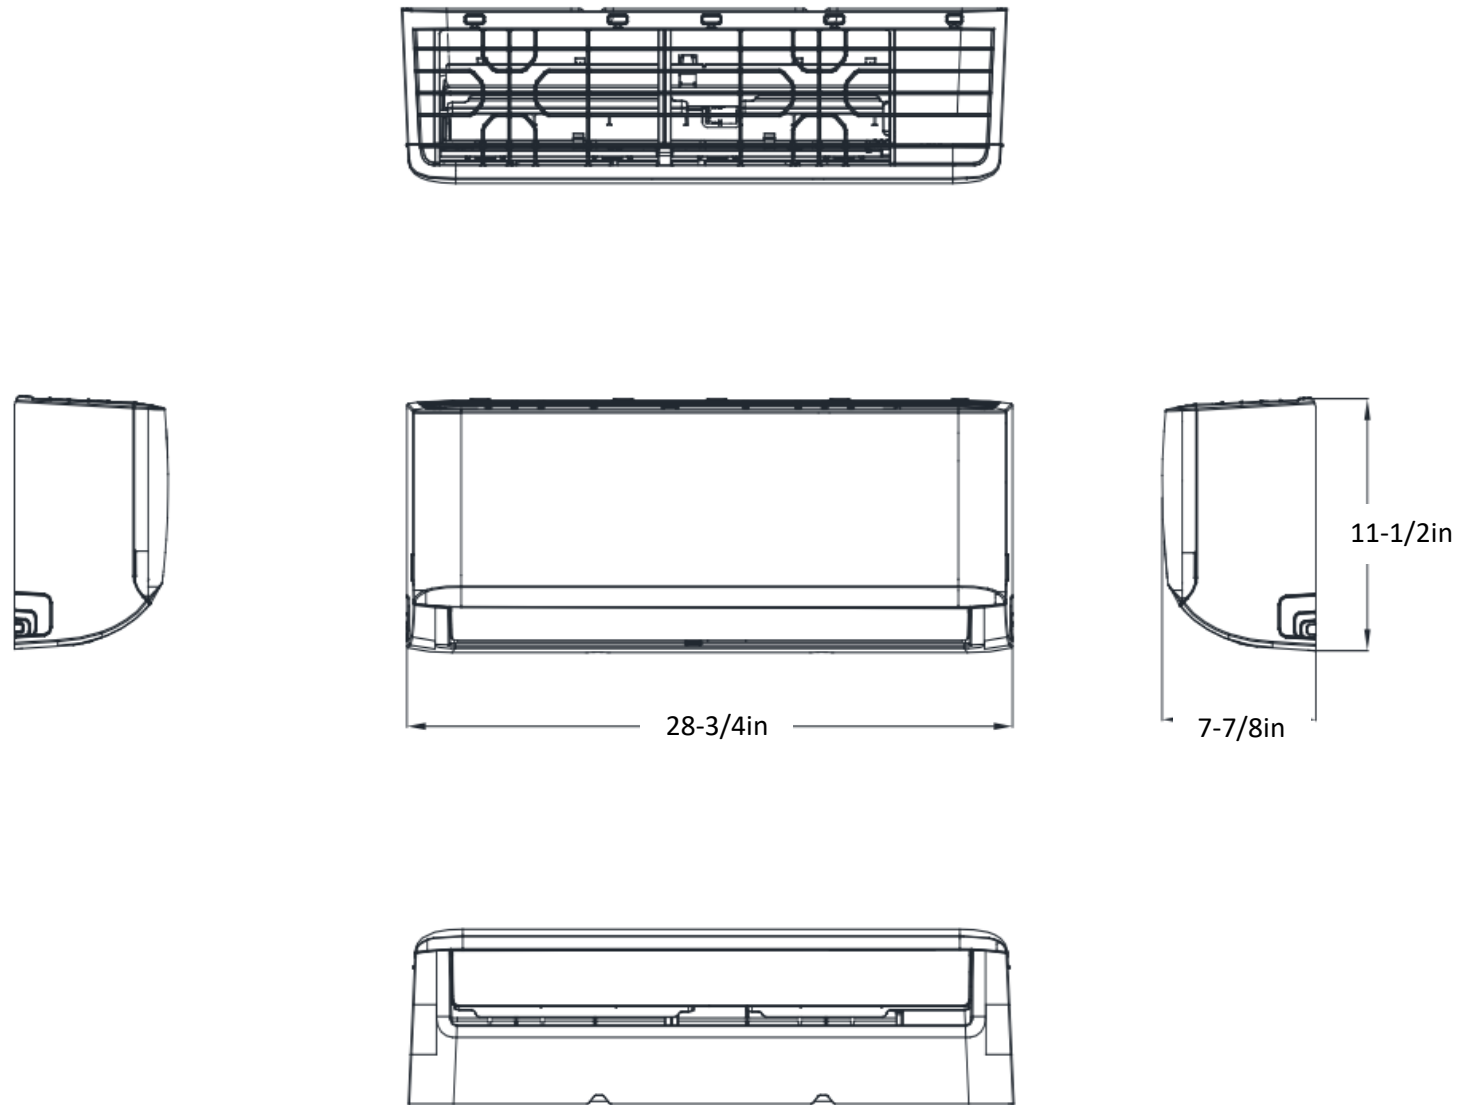


Indoor Unit Dimensions (Blow Up)

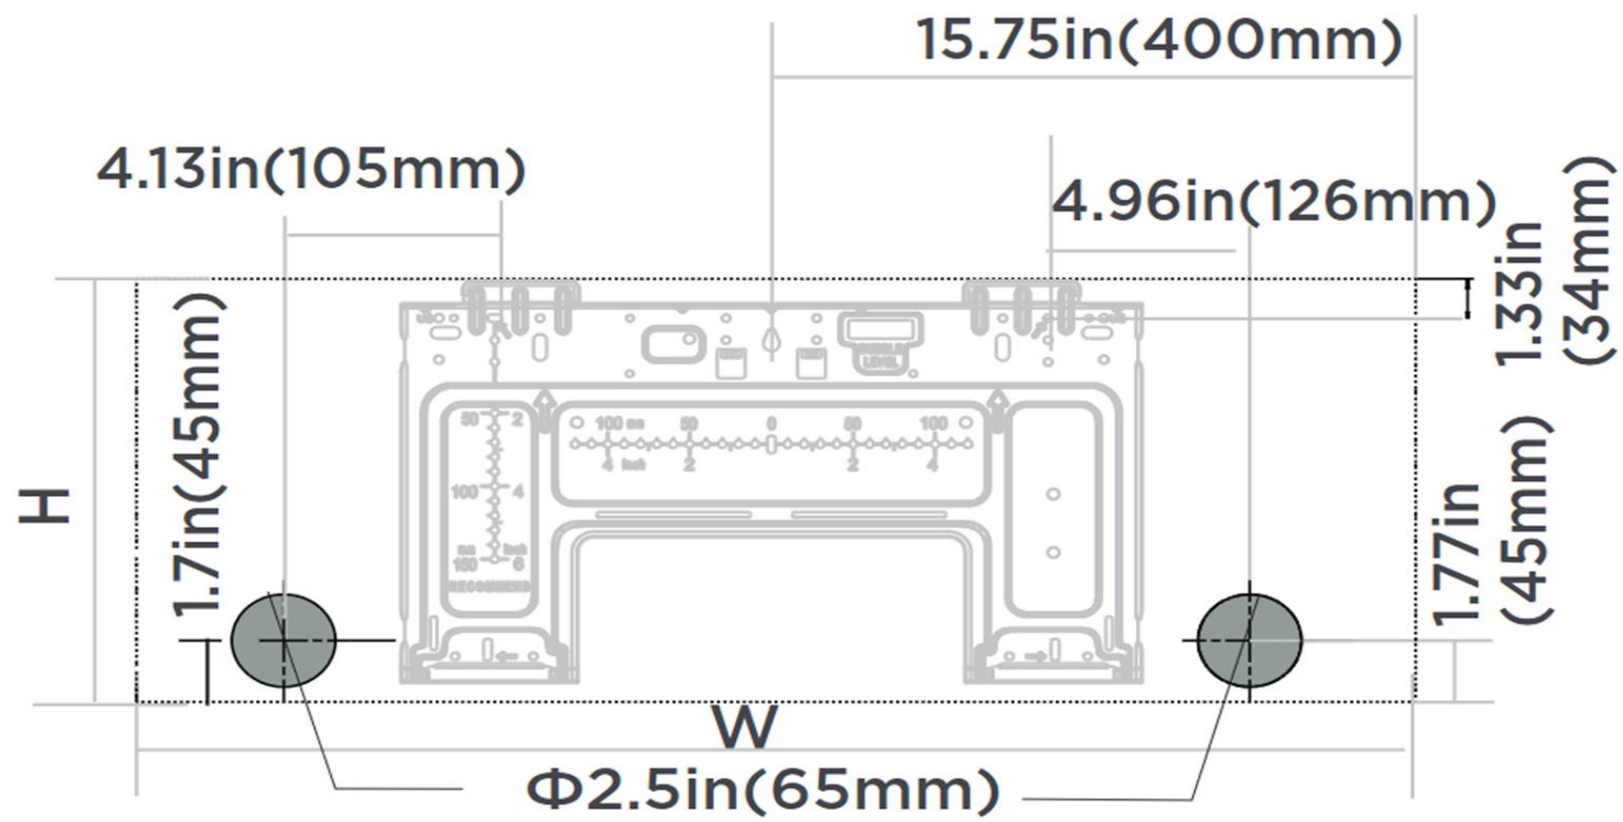

Indoor unit dimensions(WxH):
 $28.7\text{in}(729\text{mm})\times 11.5\text{in}(293\text{mm})$

Outdoor Unit Dimension

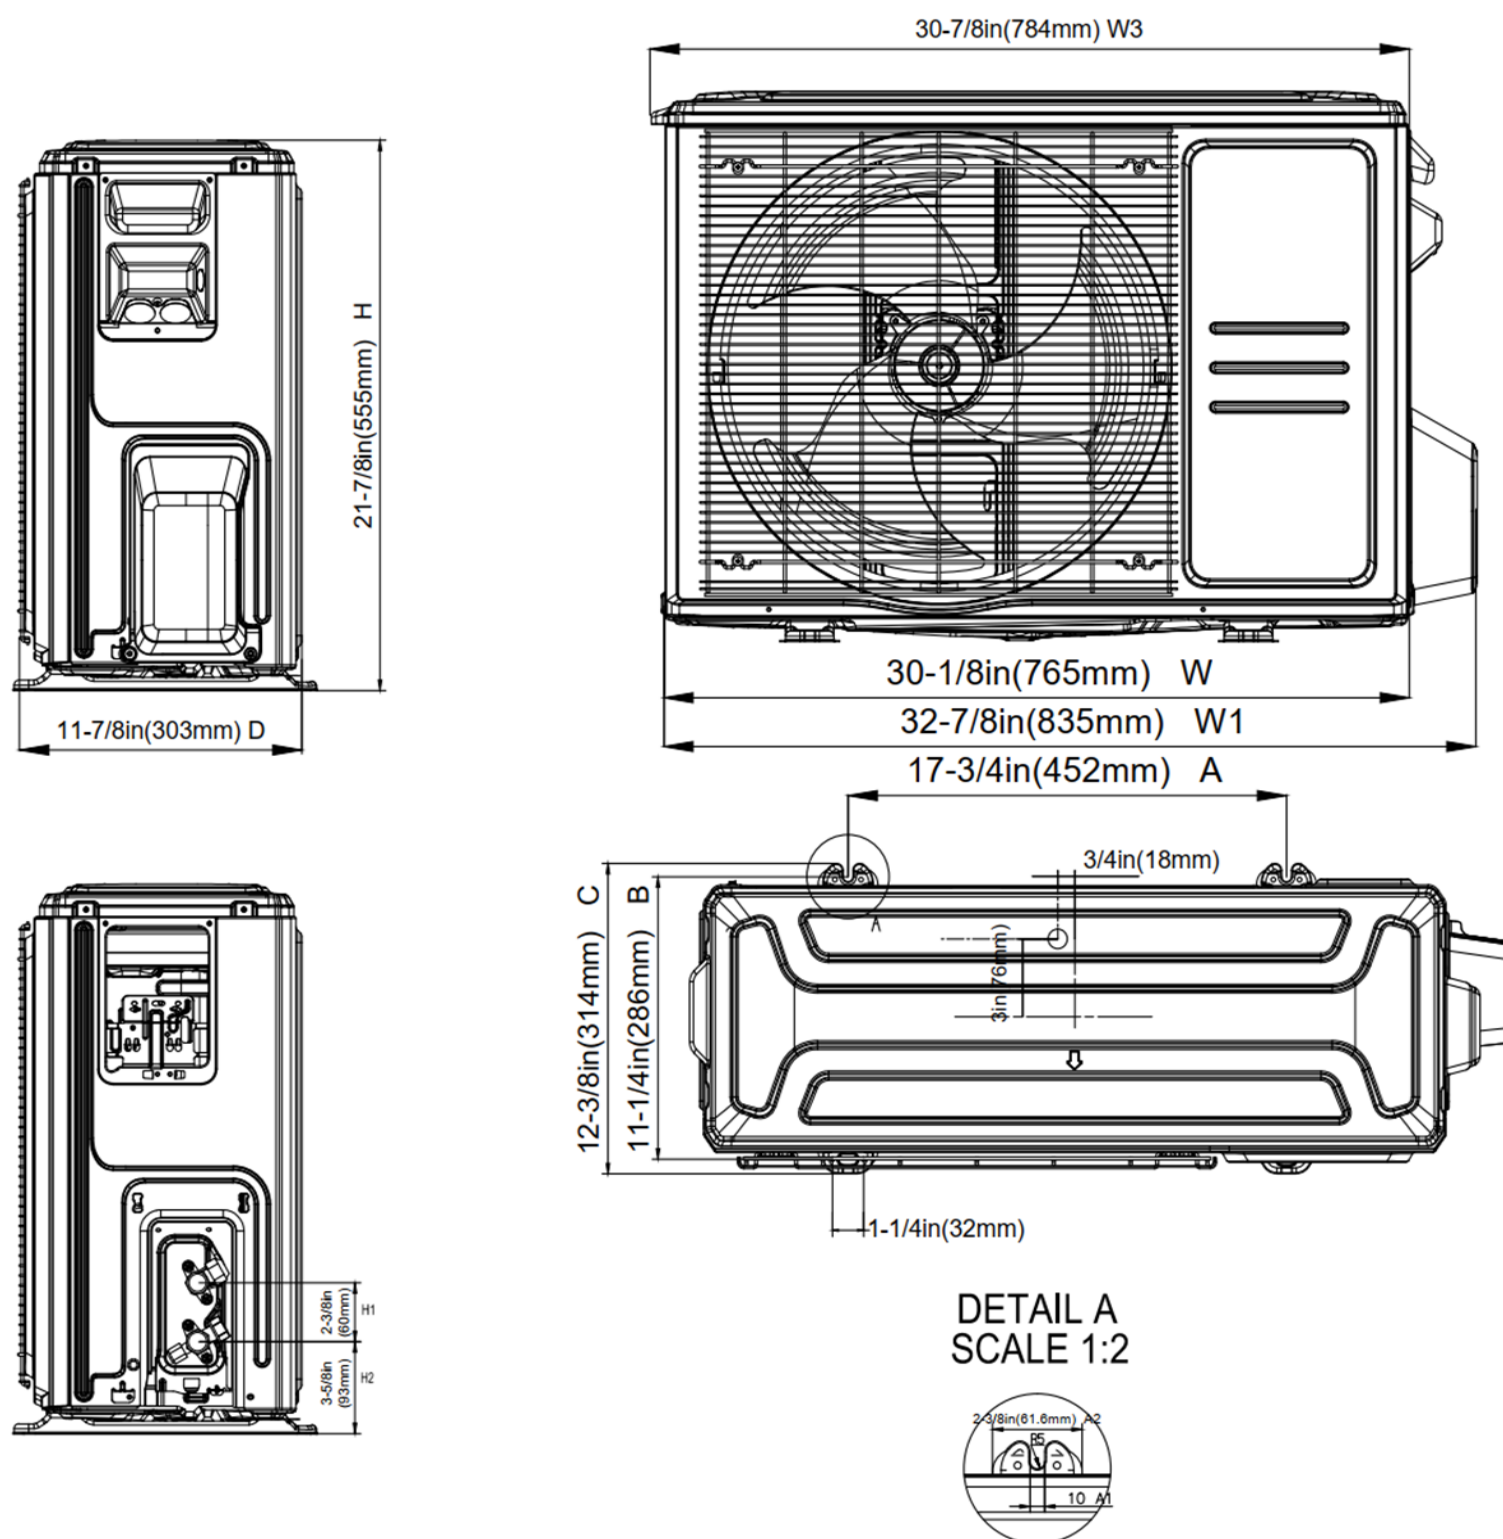

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.