

MOU-B18G-2/MIU-B18GW-2

18,000 BTU Wall-Mount Indoor/Heat Pump Outdoor Unit

Job Name:	
Reference:	Date:



INDOOR SPECIFICATION		
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		470.9 / 400.2 / 329.6 / 270.8 / 270.8
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		49.0 / 45 / 38 / 23 / 19
Dimension (W×D×H)	inch	38-1/4 × 9 × 12-11/16
	mm	(971 × 228 × 321)
Package (W×D×H)	inch	41-3/16 × 12-1/16 × 15-15/16
	mm	(1045 × 305 × 405)
Net/Gross Weight	lbs	26 / 33
	kg	(12 / 15)

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KSN140D21UFZ
Refrigerant		R454B
Refrigerant Oil Charge(mL)		440
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1235.3
Outdoor Noise Level (dBA)		58
Dimension (W×D×H)	inch	31-11/16 × 13 × 21-13/16
	mm	(805 × 330 × 554)
Package (W×D×H)	inch	36-1/16 × 14-9/16 × 24-1/4
	mm	(915 × 370 × 615)
Net/Gross Weight	lbs	73 / 79
	kg	(33 / 36)

EFFICIENCY			
Cooling		Heating	
SEER2	20.2	HSPF2-4	9.1
EER2	11.5	COP	3.08


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	2600~18600
Moisture Removal(L/h)	2.5
Standard Operating Range(°F/°C)	5~122(-15 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	18800
1. @ 47°F Min/Max Capacity	6100~19200
2. @ 17°F Rated	11700
3. @ 5°F Rated: Capacity / COP	11500/2.00
3. @ 5°F Max: Capacity	11500
Standard Operating Range(°F/°C)	5~75(-15 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	15
Connection Wiring	14x4
System MOCP	20
Compressor RLA	10
Outdoor Fan Motor RLA	0.4
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.5
Indoor Fan Motor W	30
System Power Input @ Cooling (W)	1565 (280 ~ 1680)
System Power Input @ Heating (W)	1790 (365 ~ 2010)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	Capillary
Liquid Size	1/4in (6.35mm)
Gas Size	1/2in (12.7mm)
Max. Piping Length(ft/m)	98.40 (30)
Max. Height Difference(ft/m)	65.60 (20)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	40.57 (1.15)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

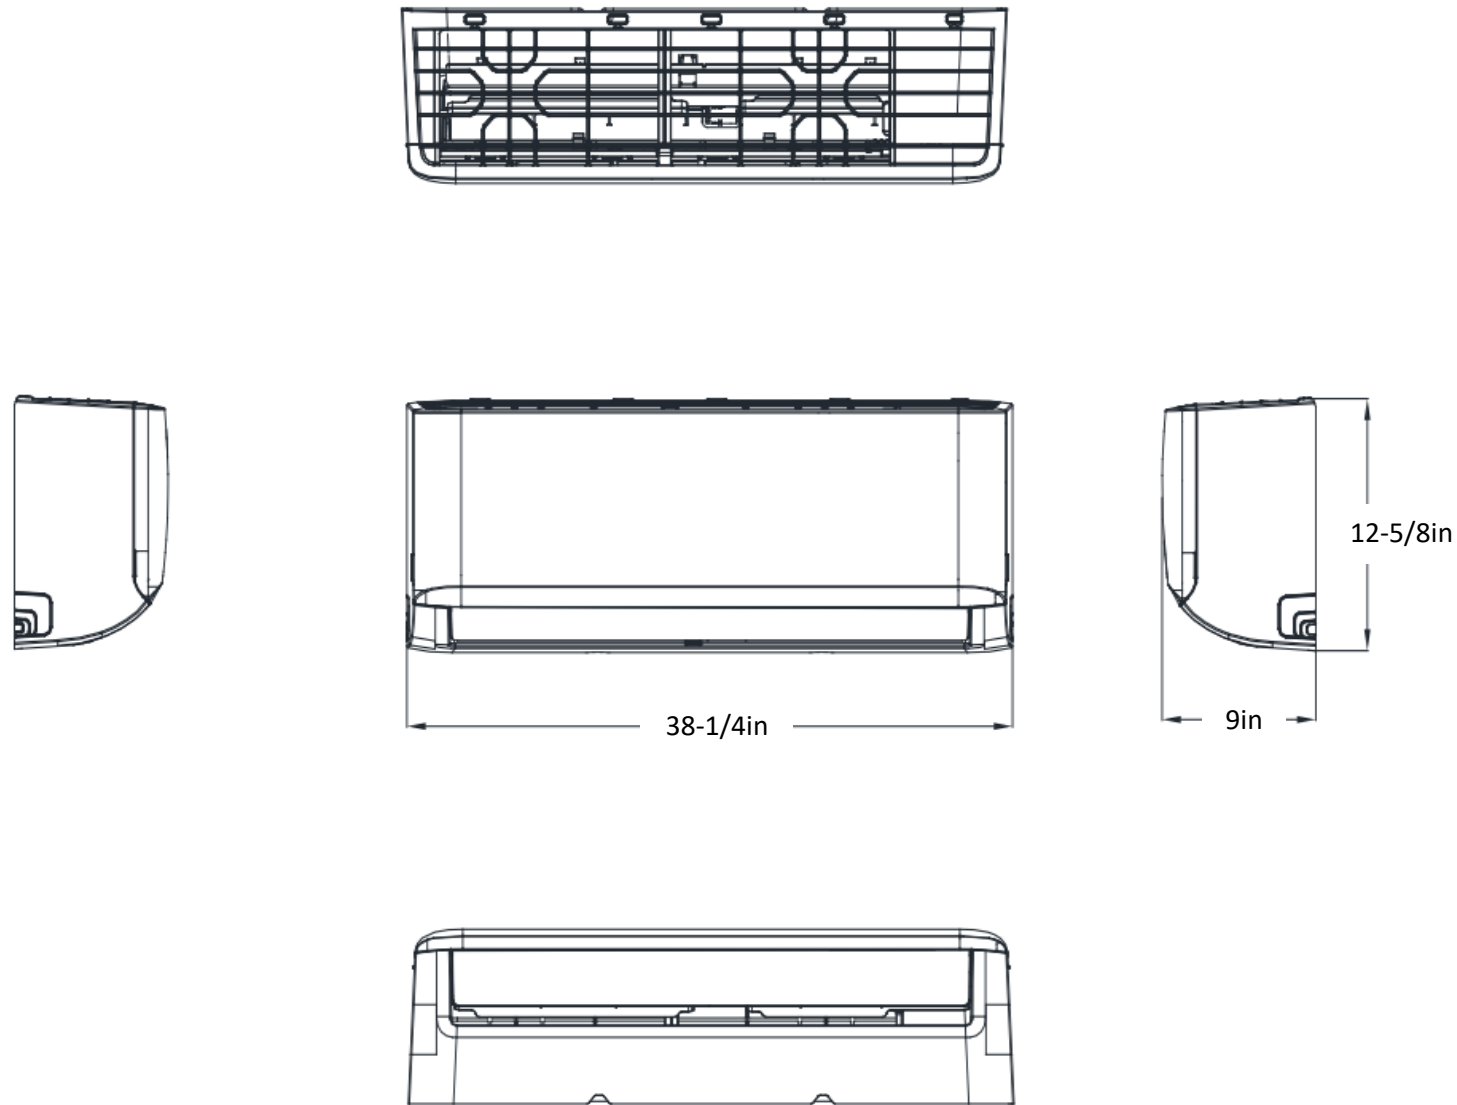


Indoor Unit Dimensions (Blow Up)

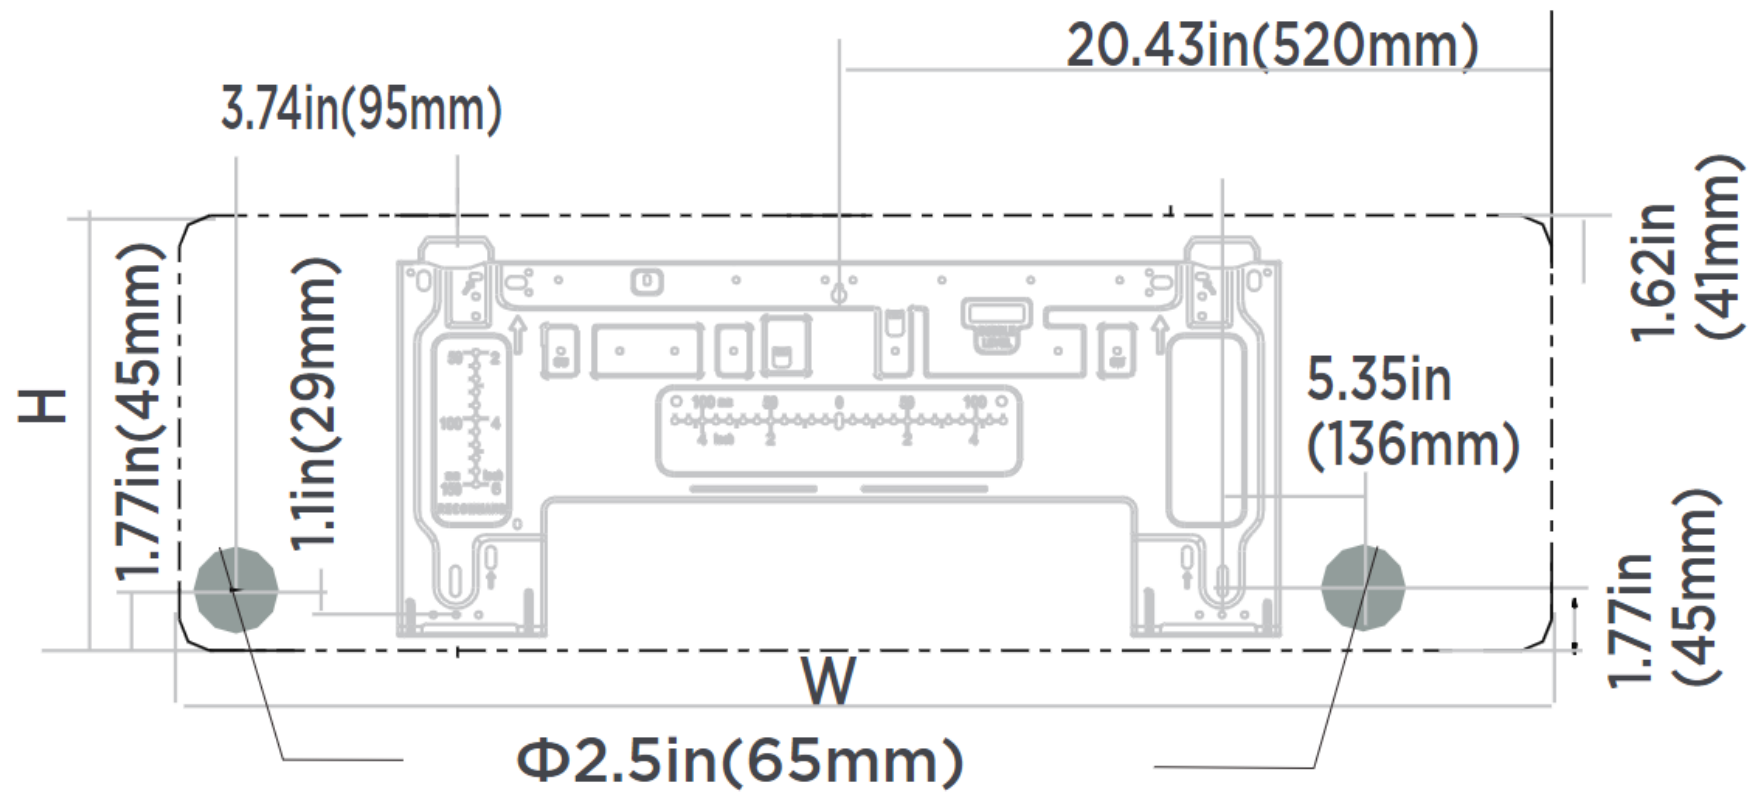

Indoor unit dimensions(WxH):
38.2in(971mm)x12.6in(321mm)

Outdoor Unit Dimension

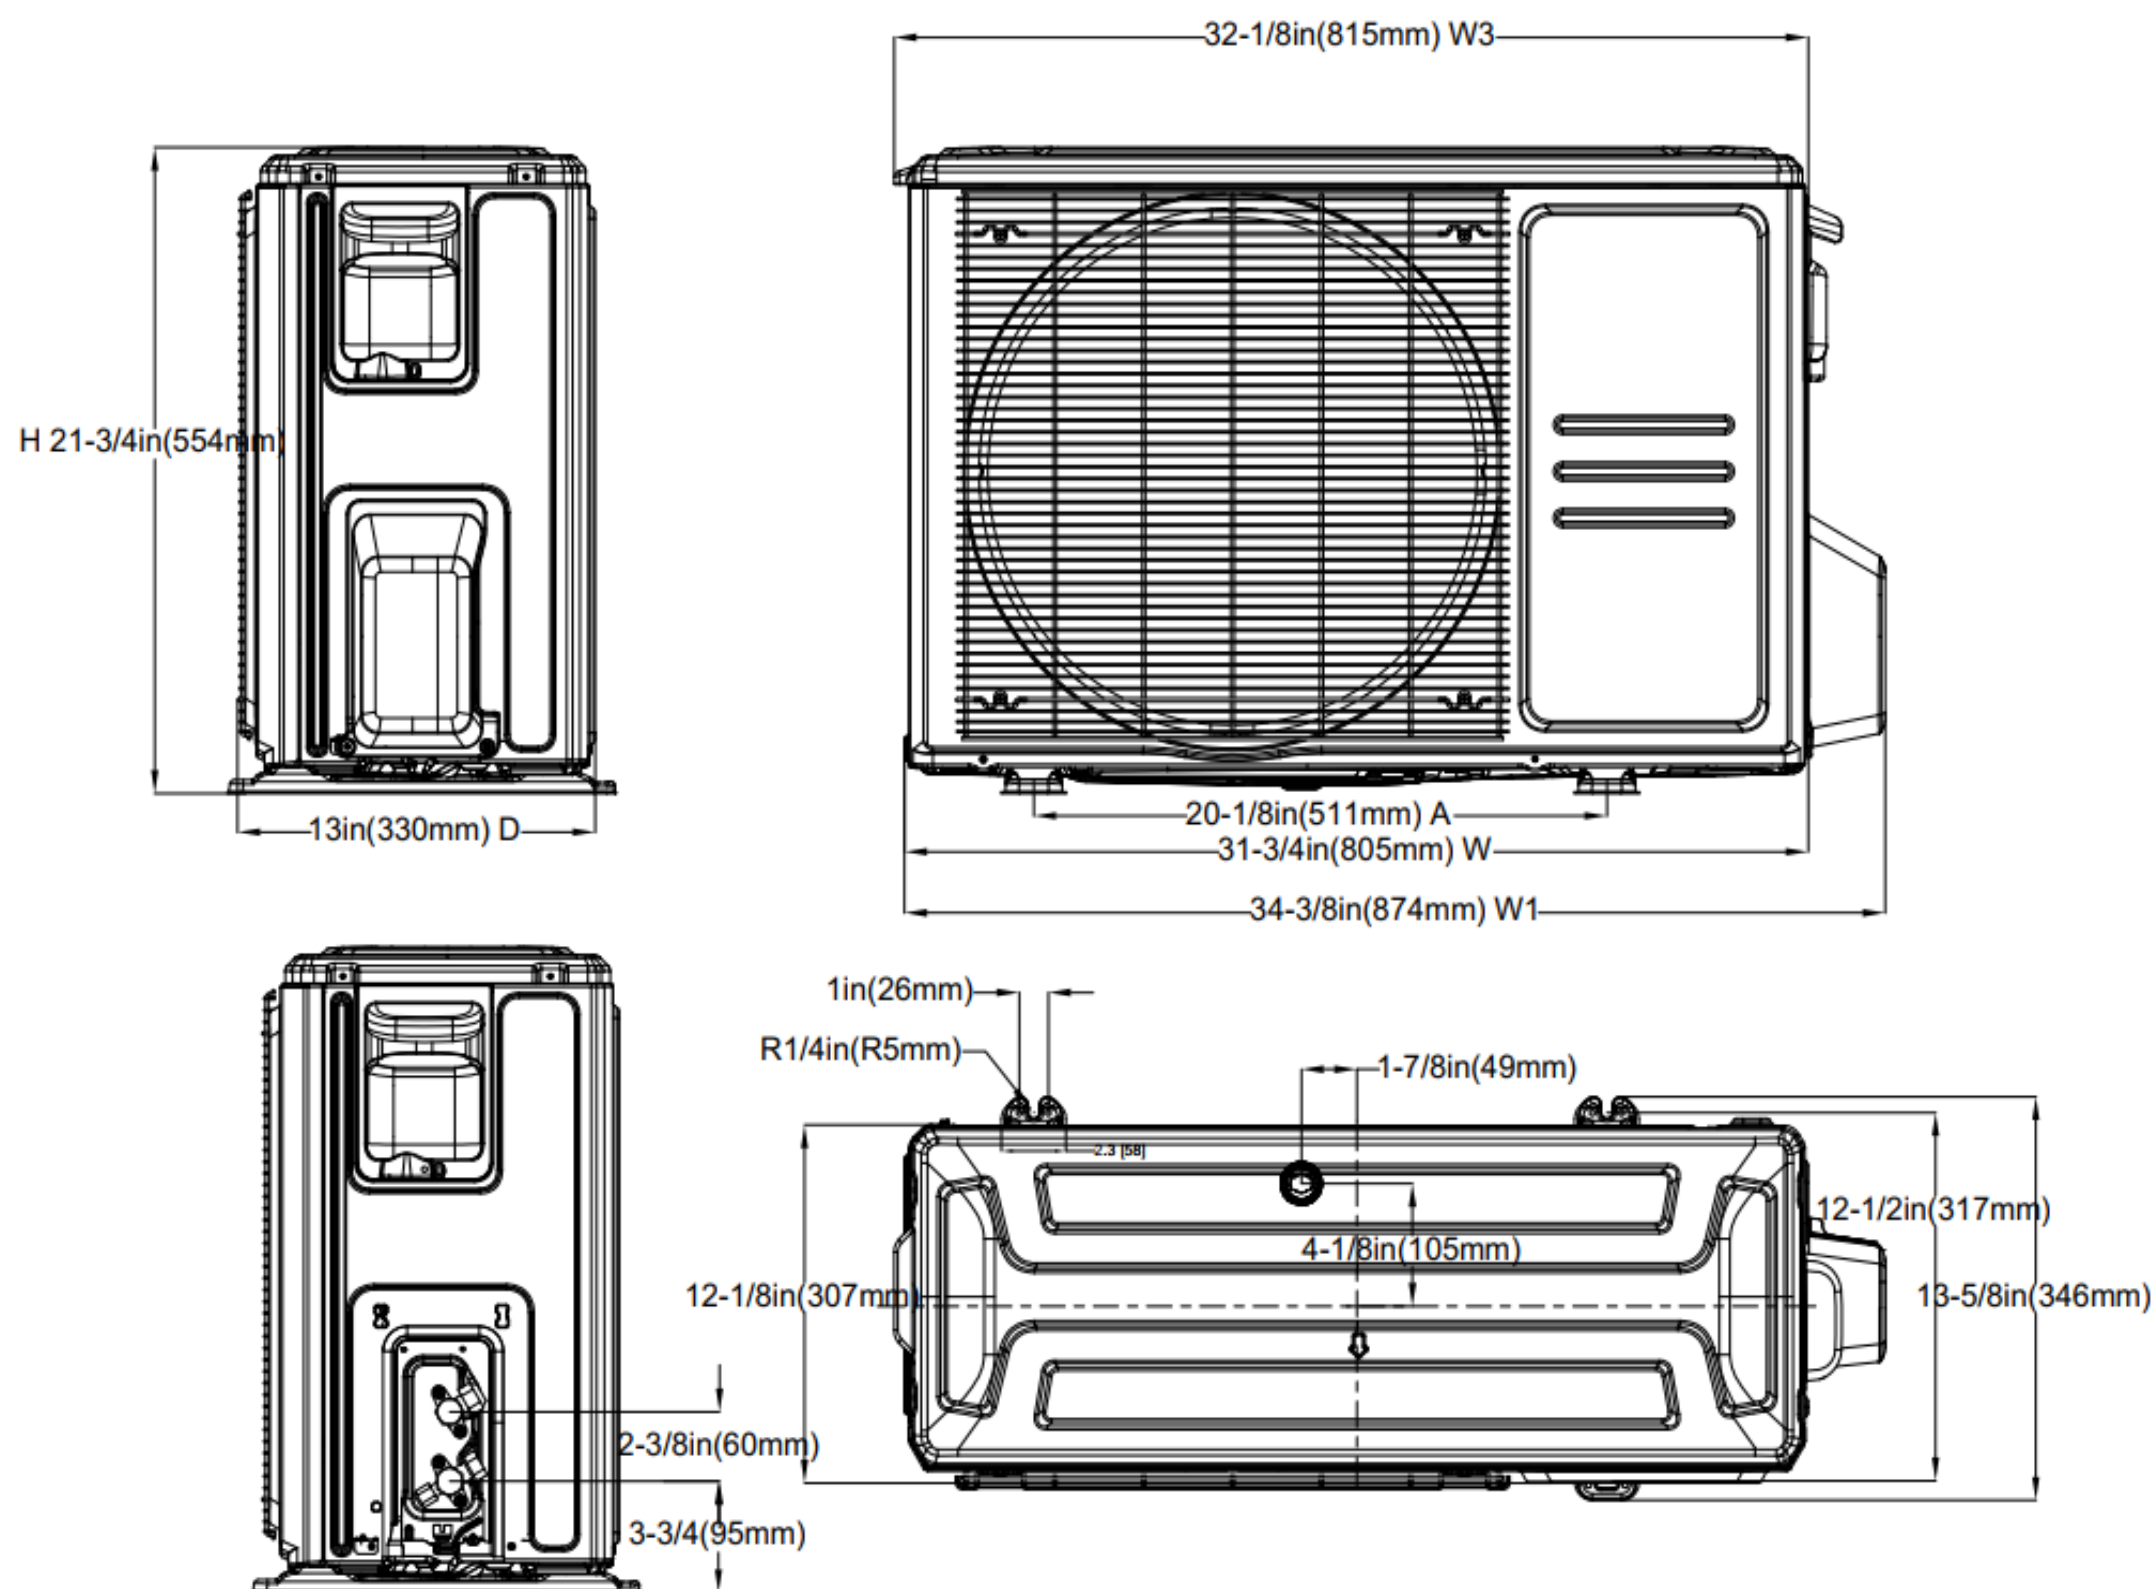

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.