

MOU-B09H-2/MIU-B09W-2

9,000 BTU Wall Mount Indoor Unit/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		382.6 / 294.3 / 194.2 / 153.0 / 153.0
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		39.5 / 39.5 / 33 / 24 / 20.5
Dimension (W×D×H)	inch	31-5/8 × 7-7/8 × 11-5/8
	mm	(802 × 200 × 295)
Package (W×D×H)	inch	34-1/2 × 11-1/4 × 15
	mm	(875 × 285 × 380)
Net/Gross Weight	lbs	19 / 25
	kg	(9 / 11)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTN110D42UFZ
Refrigerant		R454B
Refrigerant Oil Charge(mL)		350
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1470.6
Outdoor Noise Level (dBA)		56
Dimension (W×D×H)	inch	31-3/4 × 13 × 21-13/16
	mm	(805 × 330 × 554)
Package (W×D×H)	inch	36-1/16 × 14-5/8 × 24-1/4
	mm	(915 × 370 × 615)
Net/Gross Weight	lbs	73 / 79
	kg	(33 / 36)

EFFICIENCY

Cooling		Heating	
SEER2	26.0	HSPF2-4	12.5
EER2	15.0	COP	3.63

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	9000
Min/Max Capacity	3600~13500
Moisture Removal(L/h)	0.6
Standard Operating Range(°F/°C)	-22~122(-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	12000
1. @ 47°F Min/Max Capacity	3800~16000
2. @ 17°F Rated	10000
3. @ 5°F Rated: Capacity / COP	11500/1.80
3. @ 5°F Max: Capacity	11500
Standard Operating Range(°F/°C)	-22~75(-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	15
Connection Wiring	14x4
System MOC	15
Compressor RLA	10.4
Outdoor Fan Motor RLA	0.6
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.5
Indoor Fan Motor W	13
System Power Input @ Cooling (W)	600 (116 ~ 1180)
System Power Input @ Heating (W)	970 (195 ~ 1415)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV
Liquid Size	1/4in (6.35mm)
Gas Size	3/8in (9.52mm)
Max. Piping Length(ft/m)	82.00 (25)
Max. Height Difference(ft/m)	49.20 (15)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	35.27 (1)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

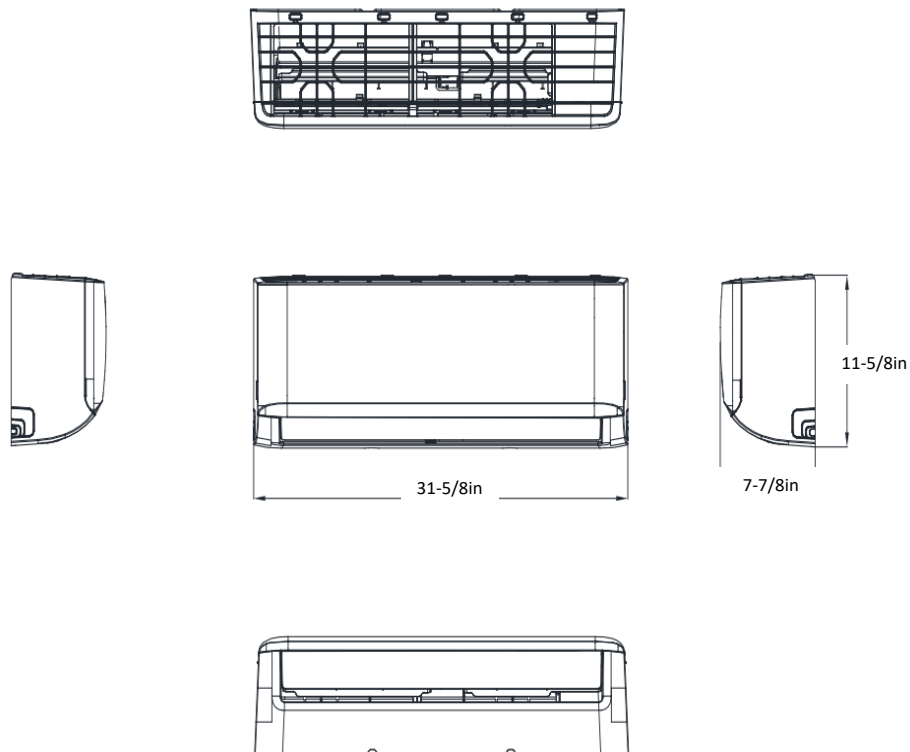


Indoor Unit Dimensions (Blow Up)

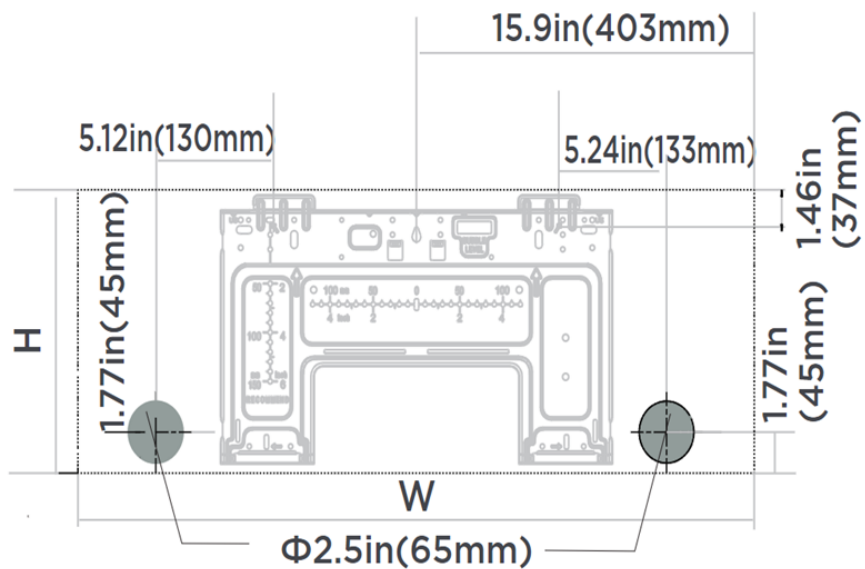

Indoor unit dimensions(WxH):
 31.7in(806mm)x11.65in(296mm)

Outdoor Unit Dimension

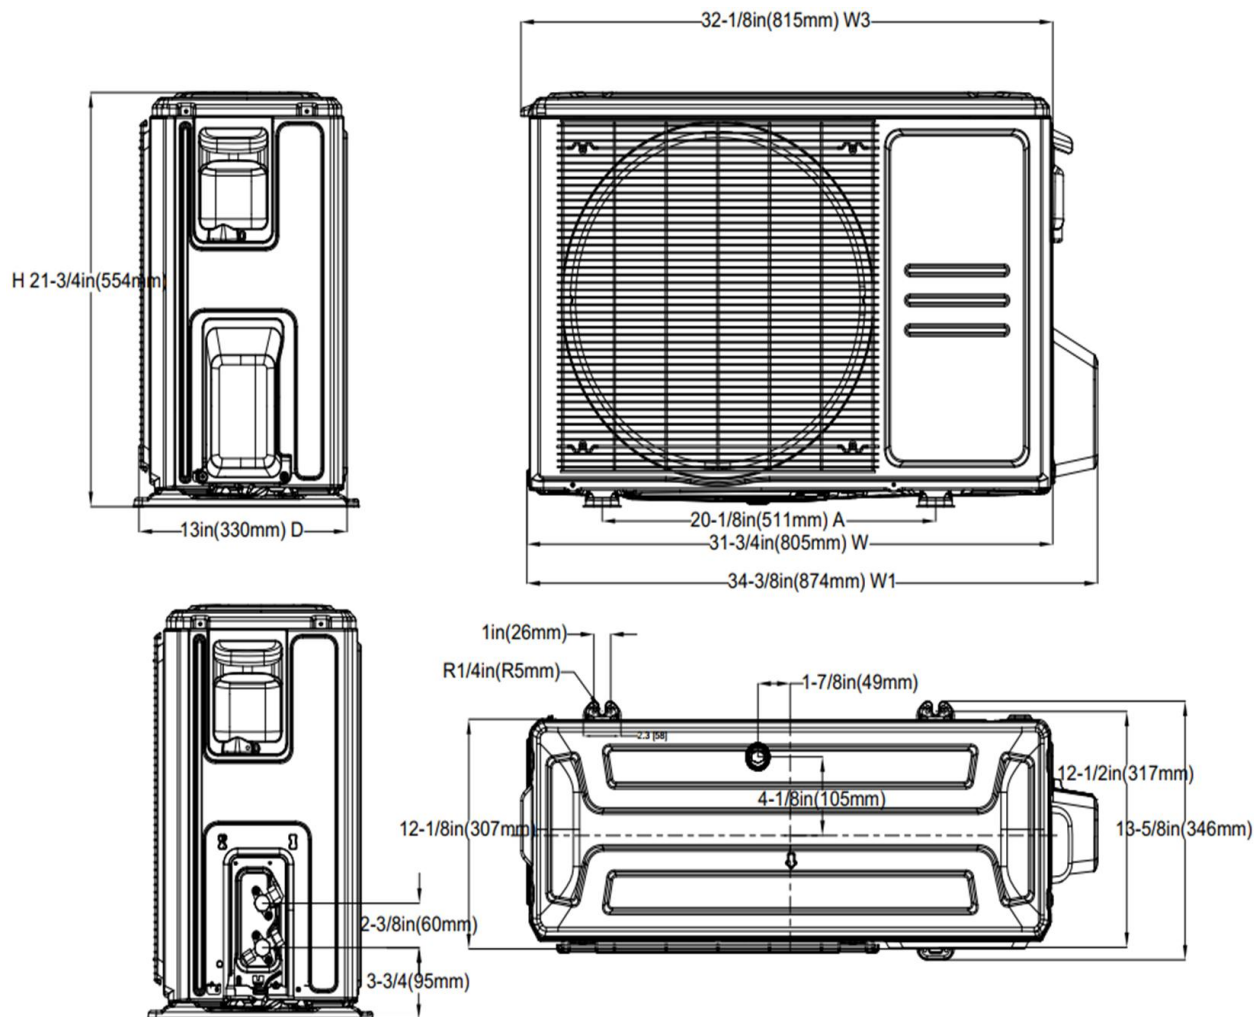

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller:120N(X6)
- Two way communication wired controller with built-in WiFi:120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.