

MOU-B18H-2/MIU-B18W-2

18,000 BTU Wall Mount Indoor Unit/Hyper Heat Outdoor Unit

Job Name:

Reference:

Date:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		759.3 / 500.3 / 441.4 / 370.8 / 370.8
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		54.5 / 45.0 / 40.0 / 24.5 / 20.0
Dimension (W×D×H)	inch	42-5/8 × 9-1/4 × 13-5/16
	mm	(1082 × 234 × 337)
Package (W×D×H)	inch	45-1/2 × 12-7/16 × 16-3/8
	mm	(1155 × 315 × 415)
Net/Gross Weight	lbs	31 / 40
	kg	(14 / 18)

OUTDOOR SPECIFICATION

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge(mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1764.7
Outdoor Noise Level (dBA)		59
Dimension (W×D×H)	inch	35-1/16 × 13-1/2 × 26-1/2
	mm	(890 × 342 × 673)
Package (W×D×H)	inch	39-3/16 × 15-11/16 × 29-3/16
	mm	(995 × 398 × 740)
Net/Gross Weight	lbs	100 / 108
	kg	(46 / 49)

EFFICIENCY

Cooling		Heating	
SEER2	21.7	HSPF2-4	10.8
EER2	13.0	COP	3.54

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	8400~20200
Moisture Removal(L/h)	1.8
Standard Operating Range(°F/°C)	-22~122(-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	18000
1. @ 47°F Min/Max Capacity	10300~23000
2. @ 17°F Rated	14400
3. @ 5°F Rated: Capacity / COP	18000/2.00
3. @ 5°F Max: Capacity	18000
Standard Operating Range(°F/°C)	-22~75(-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	19
Connection Wiring	14x4
System MOCP	20
Compressor RLA	11.7
Outdoor Fan Motor RLA	0.9
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	0.8
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	1384 (360 ~ 1860)
System Power Input @ Heating (W)	1490 (650 ~ 1740)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	1/4in (6.35mm)
Gas Size	1/2in (12.7mm)
Max. Piping Length(ft/m)	98.40 (30)
Max. Height Difference(ft/m)	65.60 (20)
Max. Pre-charged Length(ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount(oz/g)	55.38 (1.57)
Additional Refrigerant Charge(oz/ft)/(g/m)	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

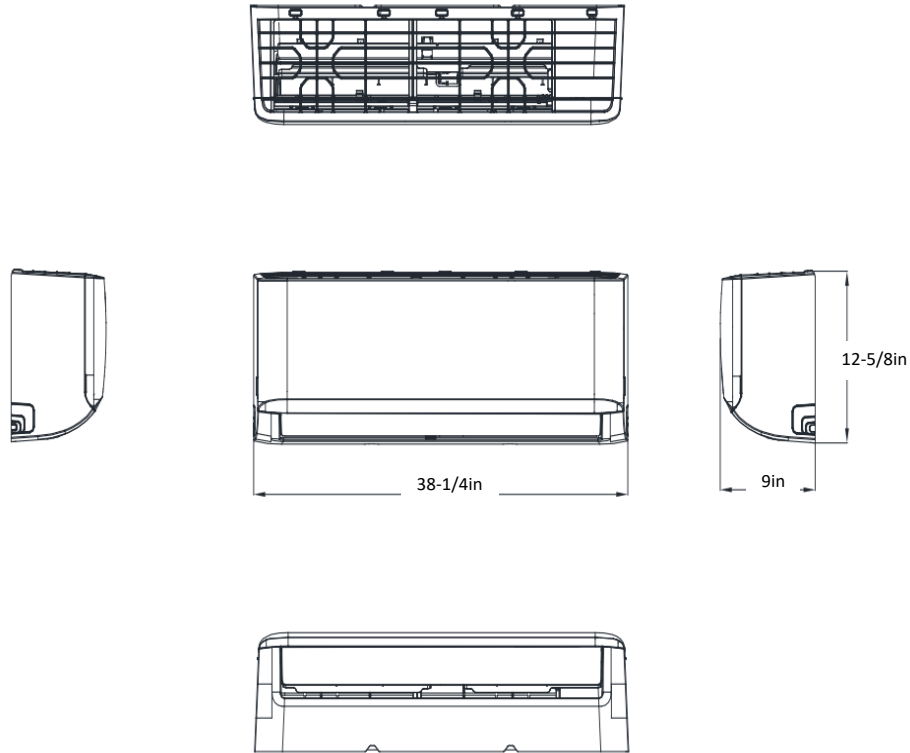


Indoor Unit Dimensions (Blow Up)

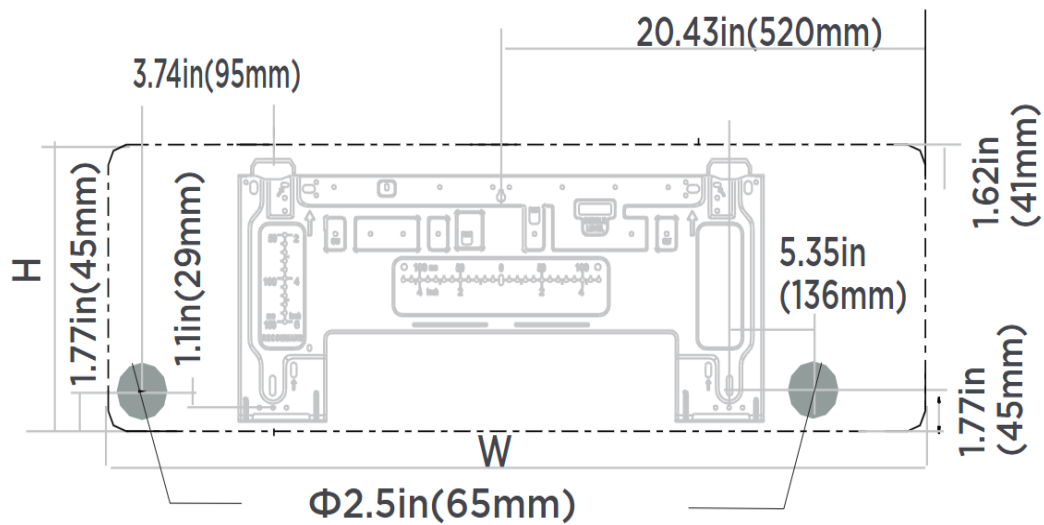

Indoor unit dimensions(WxH):
 38.2in(971mm)x12.6in(321mm)

Outdoor Unit Dimension

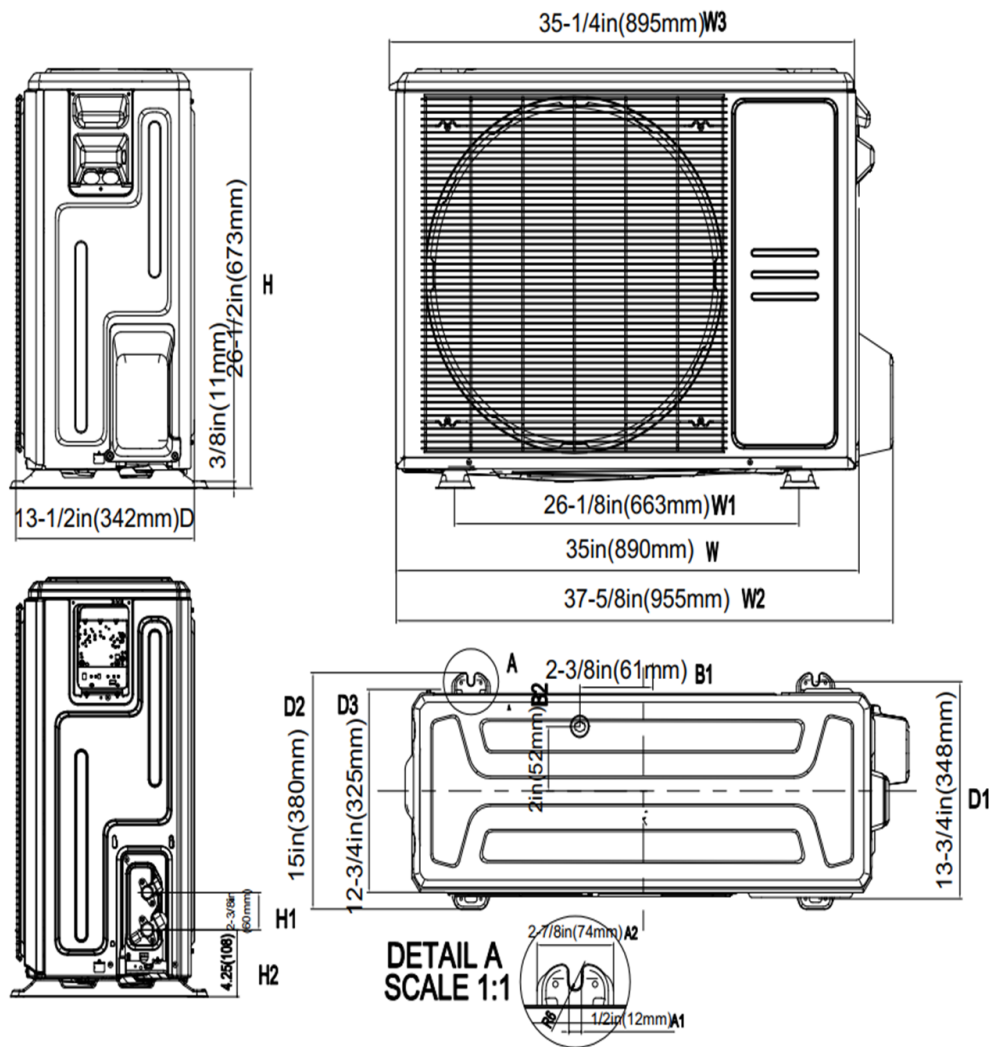

General Features

GENERAL FEATURES

- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA (by using WiFi dongle)

MULTIPLE CONTROL OPTIONS AVAILABLE:

- Two way communication wired controller: 120N(X6)
- Two way communication wired controller with built-in WiFi: 120N(X6W)
- Infrared wired controller: 120L
- Wireless remote controller
- Third-Party 24V Thermostat*

*24V interface is required.