ROV obstacle-avoidance routes across five pool scenarios

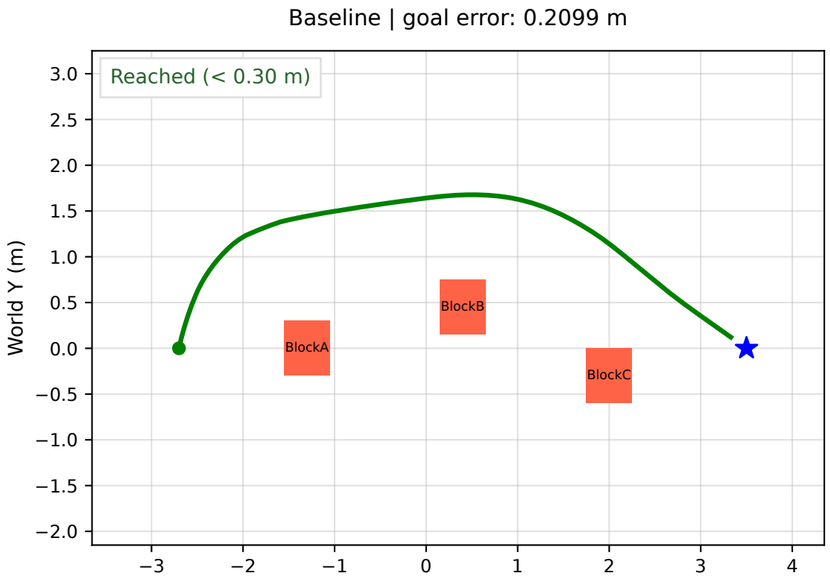

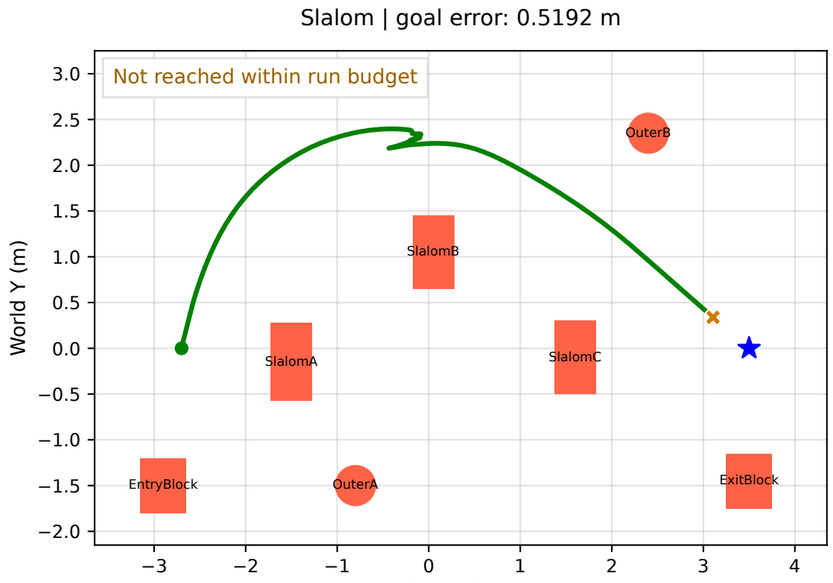

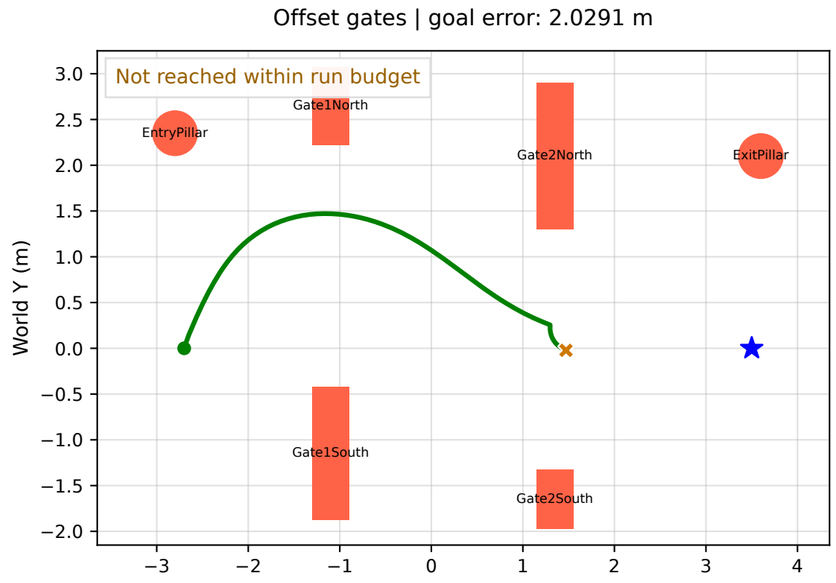

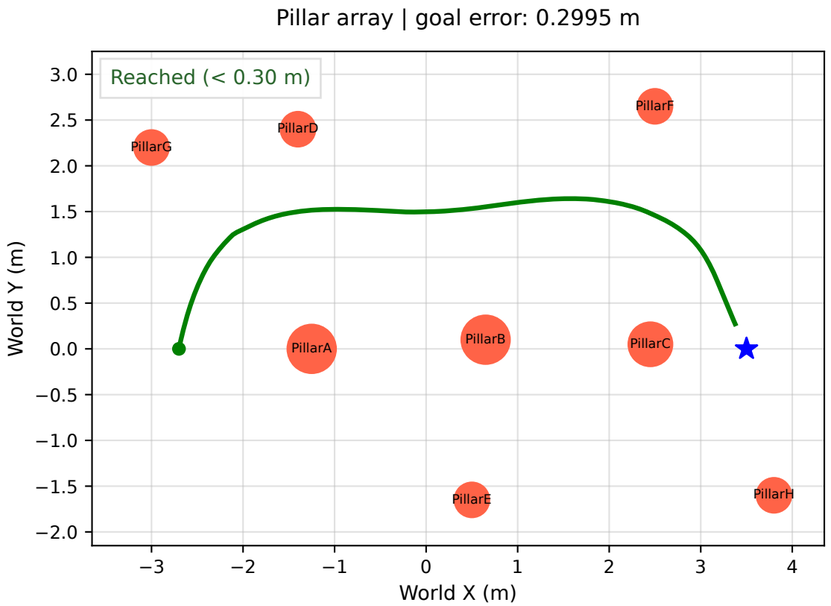

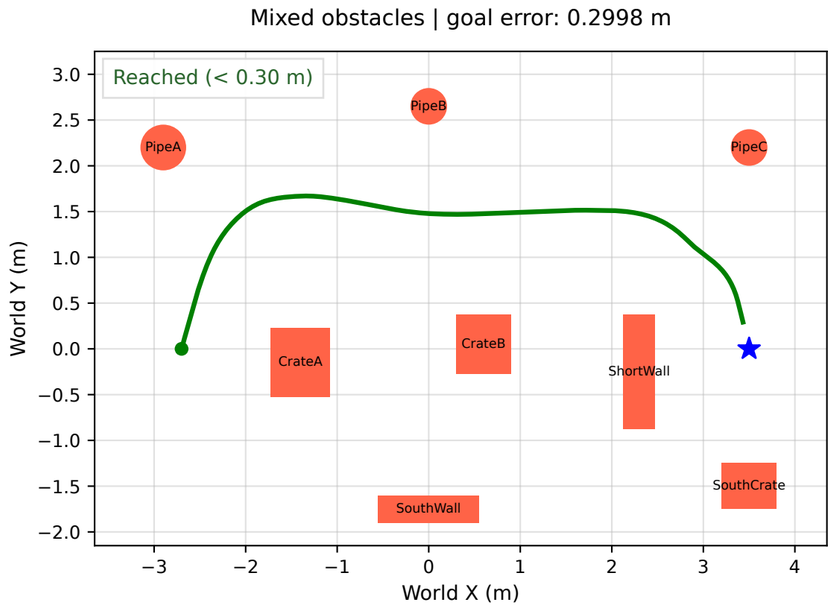

Executed ROV path
Start
Goal
Obstacle footprint
Final position: not reached

Measured trajectories from one test suite

Fixed reference height: z = 1.0 m
Ideal depth + ground-truth odometry
Goal tolerance: 0.30 m
Wall-time budget: 150 s per scenario

Routes are plotted without smoothing
or extending them to the goal.