


由 Autodesk 教育版产品制作

| REV | NATURE OF MODIFICATOON | CHANGED BY | DATE |
|---|---|---|---|
| 01 | First Issue | ZMH | 26-05-07 |
| | | | |
| | | | |

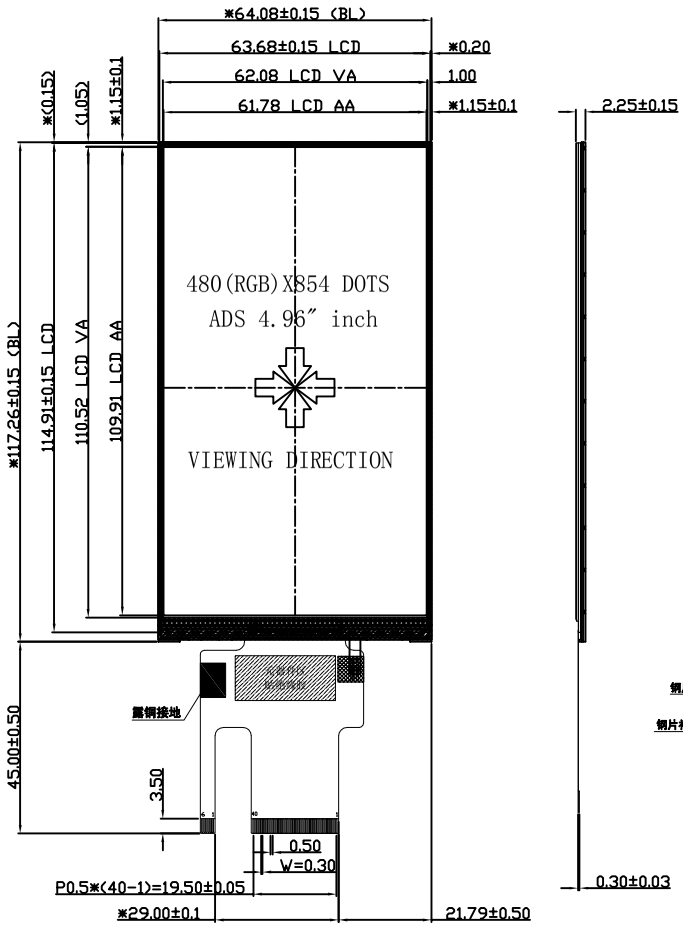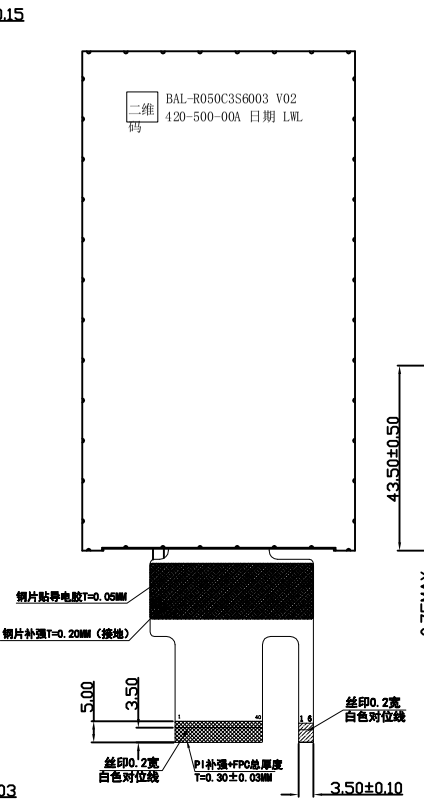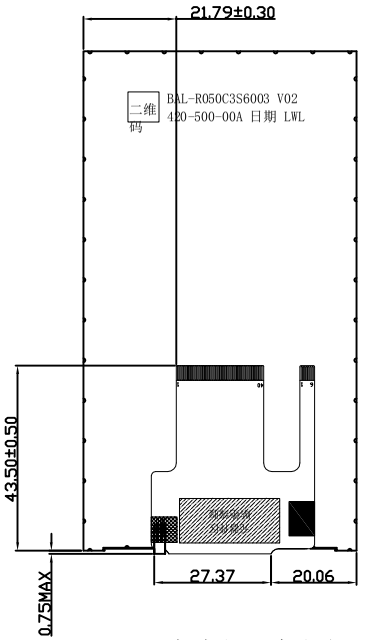


FPC弯折示意图

FPC展开出货

| | |
|---|---|
| 1 | LEDK |
| 2 | LEDA |
| 3 | GND |
| 4 | VCC2.8V |
| 5 | IOVCC1.8V |
| 6 | NC |
| 7 | SPI_SDA |
| 8 | SPI_SDO |
| 9 | SPI_SCL |
| 10 | SPI_CS |
| 11 | LCD-Rst |
| 12 | NC |
| 13 | B7 |
| 14 | B6 |
| 15 | B5 |
| 16 | B4 |
| 17 | B3 |
| 18 | B2 |
| 19 | B1 |
| 20 | B0 |
| 21 | G7 |
| 22 | G6 |
| 23 | G5 |
| 24 | G4 |
| 25 | G3 |
| 26 | G2 |
| 27 | G1 |
| 28 | G0 |
| 29 | R7 |
| 30 | R6 |
| 31 | R5 |
| 32 | R4 |
| 33 | R3 |
| 34 | R2 |
| 35 | R1 |
| 36 | R0 |
| 37 | DE |
| 38 | PCLK |
| 39 | HSYNC |
| 40 | VSYNC |

背光电路(6串3并电路)：




背光驱动:VF=18V;If=3*20MA

NOTES:

1. DISPLAY TYPE: CSOT 4.96", TFT LCD, 16.7M COLORS
2. DISPLAY MODE: TRANSMISSIVE, MODE POSITIVE
3. VIEWING DIRECTION: ALL
4. DRIVER IC: ST7102
5. VCC: 2.8 V,IOVCC: 2.8V/1.8V
6. OPERATING TEMP: −20°C TO 70°C
   STORAGE TEMP: −30°C TO 80°C
7. BACK LIGHT: 18 CHIP−WHITE LED, 6 Series 3 CONNECTION,Vf=18.00±1.20V
8. KEY DIMENSION: [ ] REFERENCED DIMENSION: ( )
9. REQUIREMENTS ENVIRONMENTAL PROTECTION: RoHS

| | |
|---|---|
| 1 | SCL |
| 2 | SDA |
| 3 | NC |
| 4 | RESET |
| 5 | INT |
| 6 | GND |

| | NAME | DATE | PRODUCT NO: R050FW40R109 | |
|---|---|---|---|---|
| DRAFTED BY: | WX | 2026.05.07 | | |
| CHECKED BY: | | | DRAW NO: LCM-R050FW40R109 | REV:V02 |
| CHECKED BY: | | | | |
| APPROVED BY: | | | | |
| 3RD ANGLE | NOT_IN_SCALE | | UNIT_MM | SHEET 1/1 |

由 Autodesk 教育版产品制作