

IIOT HARDWARE FOR DATA ACQUISITION



AI/ML



Operational
Excellence



Workflow



Business
Insights



Increased
Efficiency



Energy
Optimisation



IIoT




System
Integration

SmartFactory IIoT Connectivity Solutions

Making Real-Time Data Acquisition Smart, Fast, Ultra-Reliable and Affordable

SmartFactory's IIoT solutions have been designed to tackle one of the biggest challenges in manufacturing: collection of process, equipment, and environmental data from manual processes or legacy equipment. Our standard connectivity solutions integrate rugged industrial hardware, from the leaders in industrial automation.

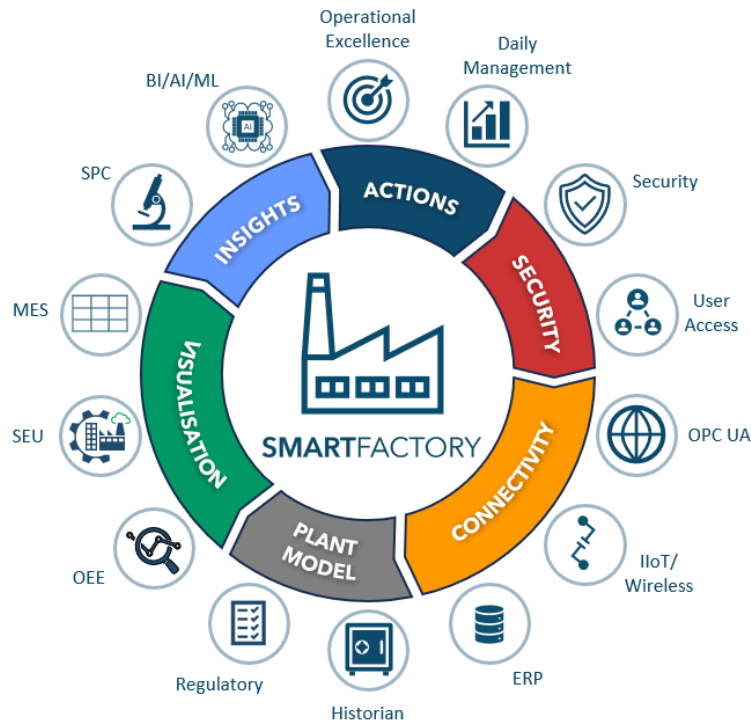

Performance and Condition Monitoring

Wireless data capture for Downtime, Scrap, Rework, Vibration, Temperature, and Current, etc.

Sustainability and SEU Monitoring

Wired and Wireless data Capture for Energy and Utilities usage (Electricity, Gas, Water, Compressed Air, etc.).

Identification & Locating Solutions

Including Vision systems, barcode readers, RFID, and Real Time Locating Systems (RTLS).

Smart Connectivity Solutions

Industrial-grade cybersecurity and network infrastructure, plug and play integrations.

Workflows & Process Automation

Pick-to-Light, Call-for-Parts and *Call-for-Help*.



Performance Monitoring Solutions

Track. Analyse. Improve.

SmartFactory's Performance Monitoring solutions are designed to provide complete visibility into your production operations – manual or automated. Designed for fast deployment and long-term reliability, these solutions are trusted by global manufacturers to reduce downtime, optimise productivity, and support Continuous Improvement initiatives.

The standard solutions include:

IIoT Toolkit #1: Out-of-the-Box IIoT Platform

A turnkey data collection and visualisation platform, preloaded with Kepware, Historian, WAPS (real-time dashboards), SQL, Power BI Gateway and more.

IIoT Toolkit #2: Wired/Wireless Gateways and Cleanroom Expansion Kit

Extend sensor coverage wirelessly in cleanrooms and isolated production areas using these wired and wireless gateways.

IIoT Toolkit #3: Flexible Wireless I/O Nodes

Highly adaptable wireless nodes with multiple I/O configurations – suitable for capturing signals from sensors, switches, counters, thermistors, and more.

IIoT Toolkit #4: Wireless Condition Monitoring Node

Monitor machine health in real-time with vibration, temperature, and current sensors. Perfect for proactive maintenance.

IIoT Toolkit #5: Wireless Output & State Monitoring

A complete, pre-configured solution to wirelessly collect real-time production output and workstation states. Cost-effective and ideal for any manual or semi-automated process.

Sensor Solutions for Manual Assembly

Capture cycle time, part placement, or manual actions with smart wired sensors connected directly to wireless nodes.


SensingCam: Visual Downtime Analysis

Revolutionise your root-cause analysis with visual confirmation of events. The SensingCam records up to 40 seconds before/after a trigger.




IIoT Toolkit (kit #1)

Out-of-the-box data collection, analytics and visualisation
(Kepware, Historian, SQL, WAPS Dashboards and Power BI)

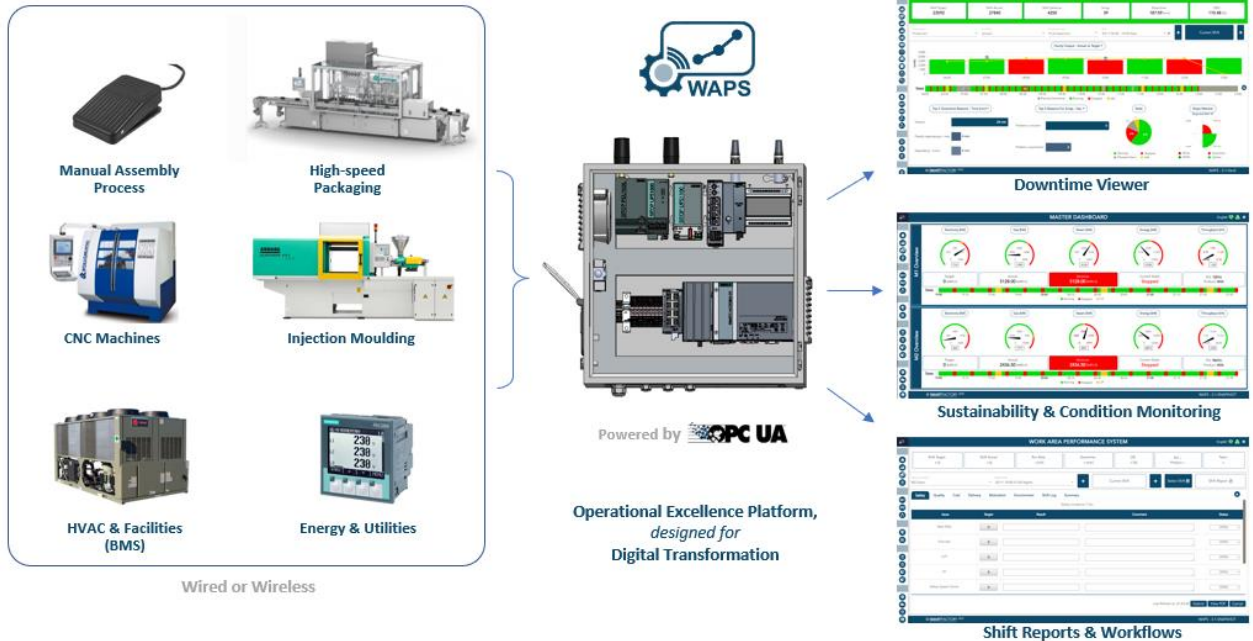

Pre-configured with the following modules:

- User Management (LDAP/SSO optional)
- Product Manager (ERP integration optional)
- Work Order Manager (MES integration optional)
- Downtime Viewer (Day-by-Hour, Downtime, Scrap, Pareto, OEE, etc.)
- Call-for-Help/Call-for-Parts
- Sustainability & Condition Monitoring (Energy, Utilities, Vibration, etc.)
- Workflow and Digital Daily Management System (Pick-to-Light, Shift Report, Production Summary Report, Label Reconciliation)
- MAPS and Grid/Site View (Dynamic KPI dashboards/maps, RTLS and RFID)

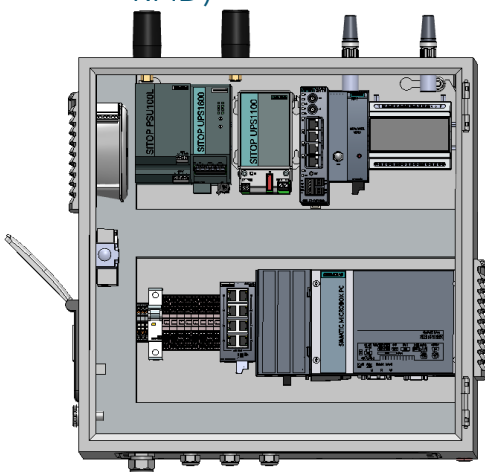

SMA214 (with CE mark)

Siemens PSU/UPS with OPC UA
Siemens Firewall/NAT/VPN device (optional)

Siemens WiFi AP (optional)

Banner DXM700 wireless sensor gateway

Siemens omni-directional antenna

Siemens 8-port switch

Siemens IPC (Windows 10 inc. x2 VM's)

Compact - Rittal enclosure

(500x500x300)



IloT Toolkit (kit #2)

Wired and Wireless Gateways


Simplified IloT Integration with secure, easily scalable and robust gateways. They support various industrial protocols including IO Link, Modbus RTU, Modbus TCP, and EtherNet/IP, ensuring seamless integration with existing automation systems.

They use frequency hopping spread spectrum (FHSS) for reliable communication and rugged industrial housings, up to IP67-rated.



Extend Monitoring into Controlled Environments

Quickly expand wireless sensor coverage into cleanrooms or isolated areas using this plug-and-play kit.

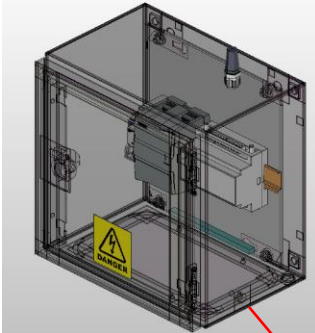


SMA230 (with CE mark)

Siemens PSU/UPS

Banner DXM700

Siemens omni-directional antenna

Rittal enclosure (300x300x210)

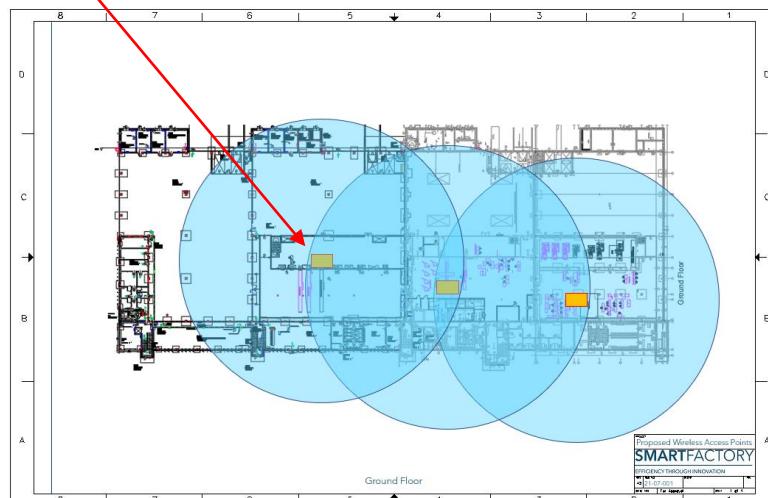

Multi Cleanroom Facility



IIoT Toolkit (kit #3)

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Connect Any Signal, From Any Sensor – Wirelessly

Modular nodes designed to support almost any I/O configuration: analogue, digital, thermistor, counters, or serial data – all over a secure wireless link.

Flex-power™ and battery powered options available



DX80 Nodes

Configurable Inputs and Outputs (PNP/PNP), 0-10v and 0-20mA Analogue I/O and 1-wire Serial Interface.

Support multiple wireless network topologies including Point-to-Multipoint, Bus, Ring, Star, Tree and Mesh.



R70 Serial Radios

Highly flexible, low-power wireless devices which can be configured as a Master, Repeater or Slave. MultiHop technology, which enables them to form self-healing, auto-routing mesh networks. Rugged design and reliable performance in industrial environments.

IIoT Toolkit (kit #4)

Proactive Maintenance, Without the Complexity

Monitor vibration, current, and temperature data in real-time – all from a compact wireless node with pre-configured sensors.



DX80DR2M-H10

Pre-Configured for Vibration and Temperature Sensors and Current Transformer.
Battery powered options available.

[Link to
Condition
Monitoring
video](#)



IIoT Toolkit (kit #5)

Highly flexible, scalable and quick to install

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Complete solution to wirelessly capture real-time production output and state, from any manual workstation or automated production unit



LED Segment for
State or **Call-for-Help** programmable
with 14 colours



Wireless Node for
State with high
speed counter



Stainless Steel
bracket



Product/Cycle
Counter
(required)
Derived **State**
(optional)
Call-for-Help button
Set-up Mode
selector switch



Wireless Pendant for
**Scrap Count and
Reasons**

24v or Li-Ion powered



Single 8-pin M12
quick disconnect
cable (required)



Sensor Solutions for Manual Assembly

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION


Make Every Manual Task Measurable

Capture cycle time, operator actions, or part placement using smart wired sensors connected to wireless nodes.



Manual Activation

- Touch button
- Foot switch

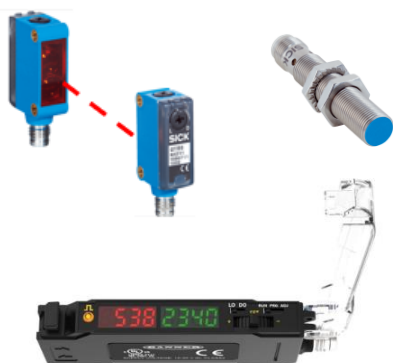

Part Placement or Machine Cycle


- Photo-optic sensor
- Inductive sensor
- Fibre-optic sensor



Machine Cycle

- Pressure-switch
- Current relay

To avoid double counts or missed counts on **manual stations**, the signal from the part-counting sensor, can be “conditioned” (anti-bounce, anti-miss)

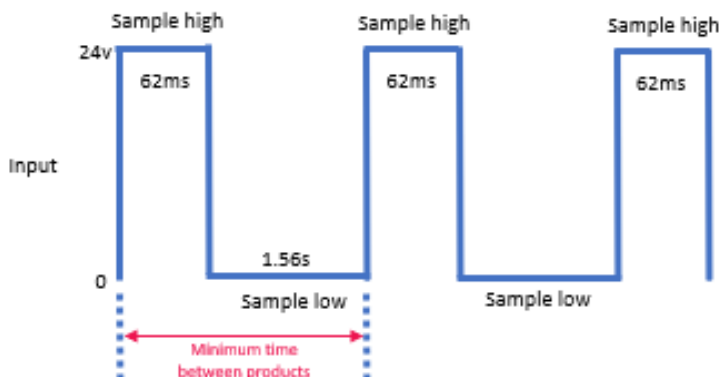

Sample Rate is the scan time of all nodes in the network: 62.5ms (fastest possible)

BANNER[®]

SICK
Sensor Intelligence.

FESTO




See the unseen

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Revolutionise downtime analysis with visual root-cause insights

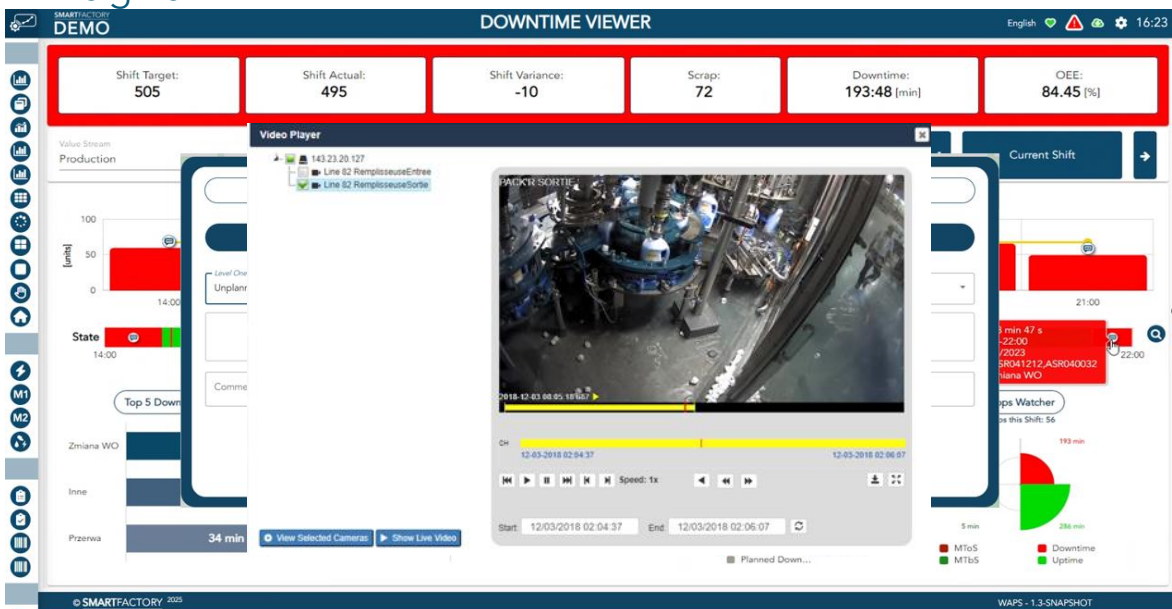

Event recording hardware

- Event recording (up to 40s before/after trigger)
 - Full integration into *Downtime Viewer Software*
 - Can be triggered by wireless sensor
- Streaming/Remote monitoring
- Snapshot/Quality documentation
- Industrial rugged design
- Miniature size
- RTSP or MJPEG stream
- 6GB storage



[Link to sensingCam](#)
[Video](#)
[Datasheet](#)

SICK

Sensor Intelligence.



Energy and Utility Monitoring

See Every Kilowatt. Track Every Drop.

SmartFactory's energy monitoring solutions give you the ability to easily and precisely measure, log, and analyse energy usage across your facility enabling better decisions, faster diagnostics, and measurable sustainability improvements.

Monitor power consumption at the plant, line, or machine level. Choose from DIN-rail, panel-mount, or self-powered energy meters with Modbus integration.

A broad range of CTs lets you monitor current draw from almost any machine or panel, with minimal installation effort.

Liquid Insight Without the Hassle

Measure usage of water and other conductive liquids with pulse-based sensors that integrate easily and quickly with wireless sensors. The optional clamp-on meters can be easily retrofitted to existing pipework, without cutting pipes or production downtime.

Stop Guessing Your Air Consumption

Compressed air is expensive – this solution helps you detect overuse, leaks or inefficient systems by monitoring localised usage in real time. The optional clamp-on meters can be easily retrofitted to existing pipework, without cutting pipes or production downtime.



Energy Monitoring

Pioneering solutions for energy monitoring

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

	Industry						Industry			Buildings and infrastructure			Circuit breakers		
	7KM PAC2200	7KM PAC3200T	7KM PAC3100	7KM PAC3120 new	7KM PAC3200	7KM PAC3220 new	7KM PAC4200	7KM PAC5100	7KM PAC5200	7KT PAC1200	7KT PAC1600	SEM3	3WL	3WL10 / 3VA27	3VA ETU8
Installation type	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail	Front mounting Standard mounting rail
Front mounting Standard mounting rail	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
Front mounting Standard mounting rail	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
Measuring connection															
Direct measurement	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Transformer measurement	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Multichannel measuring system	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Suitable transformers															
Window type current transformers	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Folding transformer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Integrated transformer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Commissioning															
MID version	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Max. input voltage L-L/N	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V	480 V / 277 V
Transformer connection version	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A	x1 A or x5 A
DC power supply unit with extra-low voltage version	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Single-phase counter version	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electrically isolated voltage inputs	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Version without display (for web interface)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Evaluation															
Measured quantities															
Average value of measured values	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Voltage, current, frequency	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Power, power factor	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Energy measurement															
Daily energy storage	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days	60 days
Apparent Active Reactive energy cos φ	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
Distortion factor THD (voltage, current)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Harmonics (voltage, current)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Phase angle/phase chart	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Load profile recording	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Picker acc. to IEC 61000-4-15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Monitoring functions															
Operating hours counter	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Limit monitoring	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Logic functions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Event log	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Gateway function	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Reporting acc. to EN 50160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Integrated fault recorder	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Integrated communication interfaces															
Digital inputs/digital outputs	1/1	1/1	2/2	2/2	1/1	2/2	2/2	0/2	0/2	-	1/1	2/1	-	-	-
SD-interface	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Modbus	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
RS485 (Modbus RTU)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ethernet with Modbus TCP	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BACnet	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Range of energy monitoring hardware (including)

- 1-phase and 3-phase meters with CE/MID Certification
- DIN rail and panel mounting options
- Optional, self-powered inductive meters
- Modbus TCP/IP
- Modbus RTU
- Digital inputs/outputs
- Measurement in-line or with CT's

Current Transformers

- Input Current: 50A up to 3000A
- Output Current: 5A
- Optional split CT's for quick installation

WAGO

SIEMENS



Cost-effective solutions for liquid and gas monitoring



 **IO-Link**

Solution to measure usage of compressed air, nitrogen, carbon dioxide, argon, etc.:

- Compact design for point-of-use measurement
- Up to 200L/min
- 4mm to 8mm tubing
- -0.9 to 10 bar
- Accuracy $\pm 2\%$ (o.m.v.)
- Volumetric and totalised flow
- Compatible with wireless technology



 **IO-Link**

Solution to measure usage of liquids:

- Compact design for point-of-use measurement
- Configurable flow threshold with indication
- Up to 100L/min
- Up to $\frac{3}{4}$ " NPT
- 0 to 12 bar
- Up to 90°C medium temperature
- Accuracy $\pm 2\%$ (FS)
- Volumetric and totalised flow
- Compatible with wireless technology



 **IO-Link**

Vortex flow meter to measure usage of liquids (including):

- Deionised Water
- Glycol solutions
- Coolants

**FESTO**

Clamp-on Solution

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Non-intrusive measurement of compressed air



Specifications - Flow Sensor:

- Pipe materials - pneumatic tubing (Polyurethane, Nylon, PFA)
- Tube sizes - 6mm to 12mm (or ½")
- Accuracy - $\pm 2\%$
- Range - up to 1750L/min
- Parameters - Volumetric and totalised flow
- Rating - IP67
- Supported fluids - Air, Nitrogen, Argon



Specifications - Amplifier Unit:

- Digital Output - Instantaneous flow/integrated flow/alert output/pulse output
- Analogue Output - 0/4-20mA
- Connectivity - IO Link

 IO-Link



Benefits:

- Compatible with wireless technology
- No moving parts
- Maximum convenience and flexibility
- Low installation cost compared to traditional flow metering technologies

 KEYENCE



Clamp-on Solution

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Non-intrusive measurement of virtually any liquid



Clamp-on solution to measure usage of:

- Water
- DI Water
- Chemicals
- Coolants
- Oils
- High Viscosity Liquids

Specifications:

- Pipe materials - most metals and plastics, tubing and high-pressure hoses
- Pipe sizes - 13mm to 44mm
- Accuracy - $\pm 3\%$ (full pipe)
- Range - up to 300L/min
- Parameters - Velocity, Volumetric and totalised flow
- Rating - IP67



Benefits:

- Compatible with wireless technology
- No moving parts
- Maximum convenience and flexibility
- Low installation cost compared to traditional flow metering technologies
- Able to operate with liquids containing bubbles

KEYENCE



Water Monitoring

Economical non-intrusive water measurement

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION




Clamp-on solution to measure usage of:

- Potable Water
- Wastewater
- Sewage
- Discharge water
- Treated water
- Cooling and heating water

Specifications:

- Pipe materials - all metals and most plastics
- Pipe sizes - 15mm to 7600mm
- Accuracy - $\pm 1\%$ (full pipe)
- Repeatability - $\pm 0.2\%$
- Range - up to 12m/s
- Parameters - Velocity, Volumetric and totalised flow
- Rating - IP67

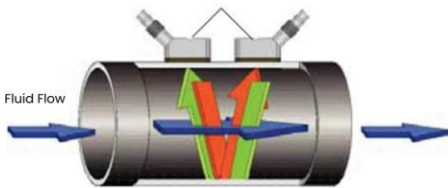

Benefits:

- Compatible with wireless technology
- No moving parts
- Maximum convenience and flexibility
- Low installation cost compared to traditional flow metering technologies

 **Panametrics**

a Baker Hughes business

Identification & Real Time Locating Systems

Know What's Where – With Confidence

SmartFactory's Identification & RTLS solutions enable precise traceability, location awareness, and automated verification of products, tools, and materials. These flexible identification solutions include RFID, barcode scanning, and vision systems to help eliminate manual entry errors.

Barcode Reading

Low-cost handheld or fixed-mount readers, with optional liquid lens technology, to trigger workflow steps.

Laser-etch 2D Data Matrix onto fixtures, for process verification.

Printing and verification of serialised labels.

RFID Tags and Readers

Accurately track assets, materials, and products to improve inventory management, streamline workflows, and enhanced quality control.

Vision Systems

Automate critical inspection and quality control processes to detect defects, verifying dimensions, and ensure accurate assembly.

Real-Time Locating System (RTLS)

SmartFactory's RTLS provides ultra-accurate indoor positioning – like GPS, but for your factory. Track assets, tools, WIP, or personnel in real time with full two-way communication and integration into ERP systems and other site-wide applications.





Identification and Vision Systems

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Vision Systems, industrial barcode readers and
RFID

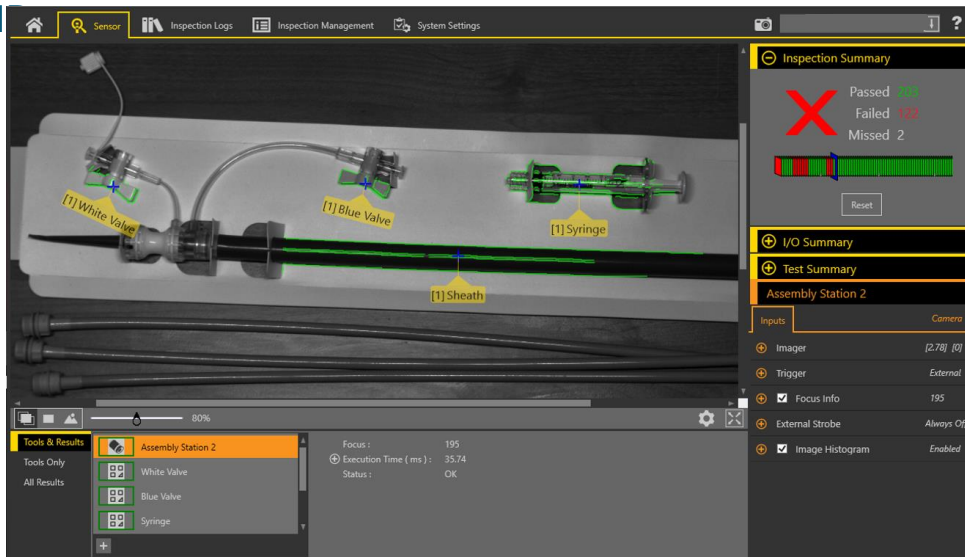

Range of identification hardware (including)

- Vision Systems
- Industrial barcode readers, with optional [liquid lens](#) technology
- RFID tags
- RFID readers
- Software
- Full hardware and software integration with WAPS and customer databases

RFID Transponders


- RFID tags
- RFID Labels




Real Time Locating System (RTLS) SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

Ultra-accurate, ultra-reliable, real-time location information

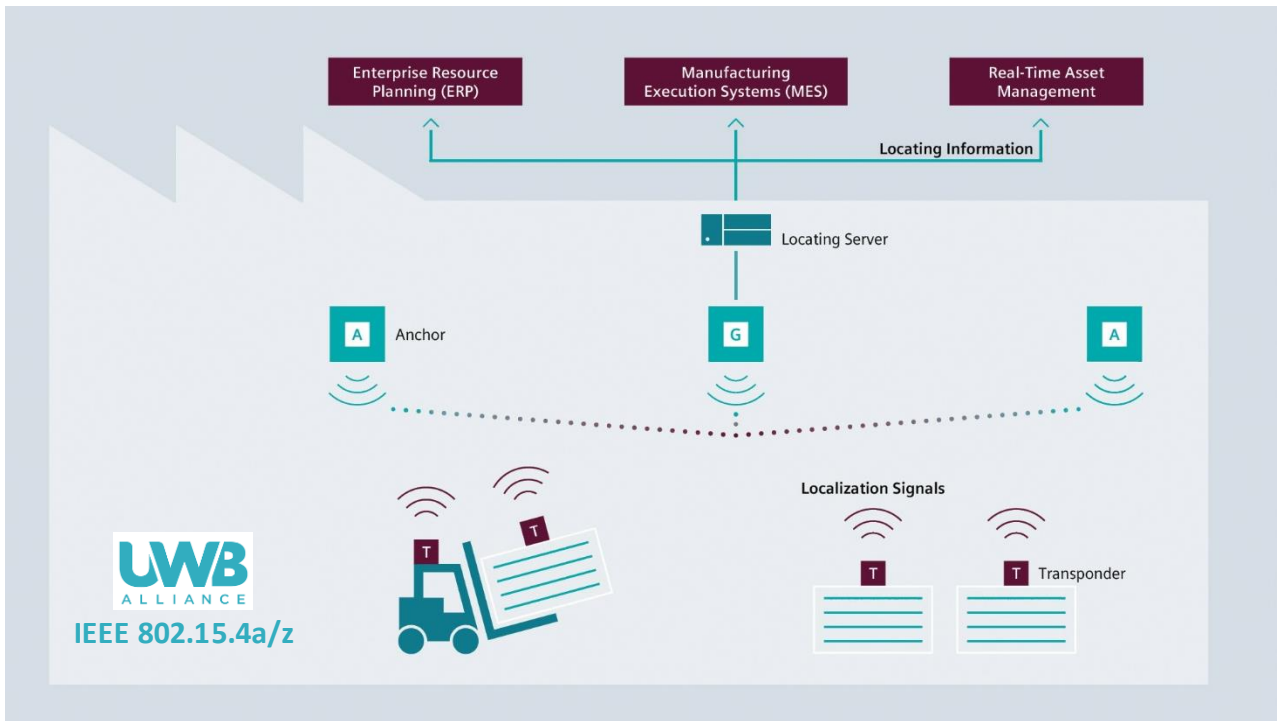

"Indoor GPS"

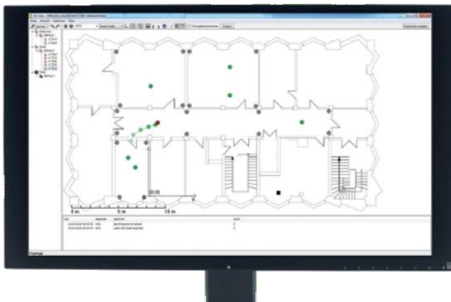

[Link to RTLS Video](#)

End-to-end solution (including)

- Transponders
- Wireless Gateways
- Locating Software
- Full integration with WAPS and customer databases



RTLS Transponder with e-paper and 2-way communication



SIEMENS



Smart Connectivity Solutions

Connect Anything. Build Securely. Scale Without Limits.

From cybersecurity to signal conversion, SmartFactory's connectivity solutions make it easy to bring real-time data from any sensor, machine, or line into your digital ecosystem – without major infrastructure changes.

Security and System Architecture

Design and deploy a secure, scalable, IIoT enabled industrial network that support edge computing, remote access, and real-time data collection – without compromise.

Snap Signal

Bring legacy analogue and discrete sensors into the digital world by converting their outputs and wirelessly transmitting them to a data Historian.

Smart Installation Solutions

Eliminate cabling delays with Power Bus – a modular 24V rail that lets you drop in wireless nodes without rewiring or cutting power.

Distributed IO-Link

Enable smart, decentralised communication and control of sensors and actuators

Wireless IO-Link

Reliable industrial communication, up to 20m. Easy extension or hybrid use with cabled IO-Link devices.




Networking & Security

Secure, ultra-reliable, industrial networks

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

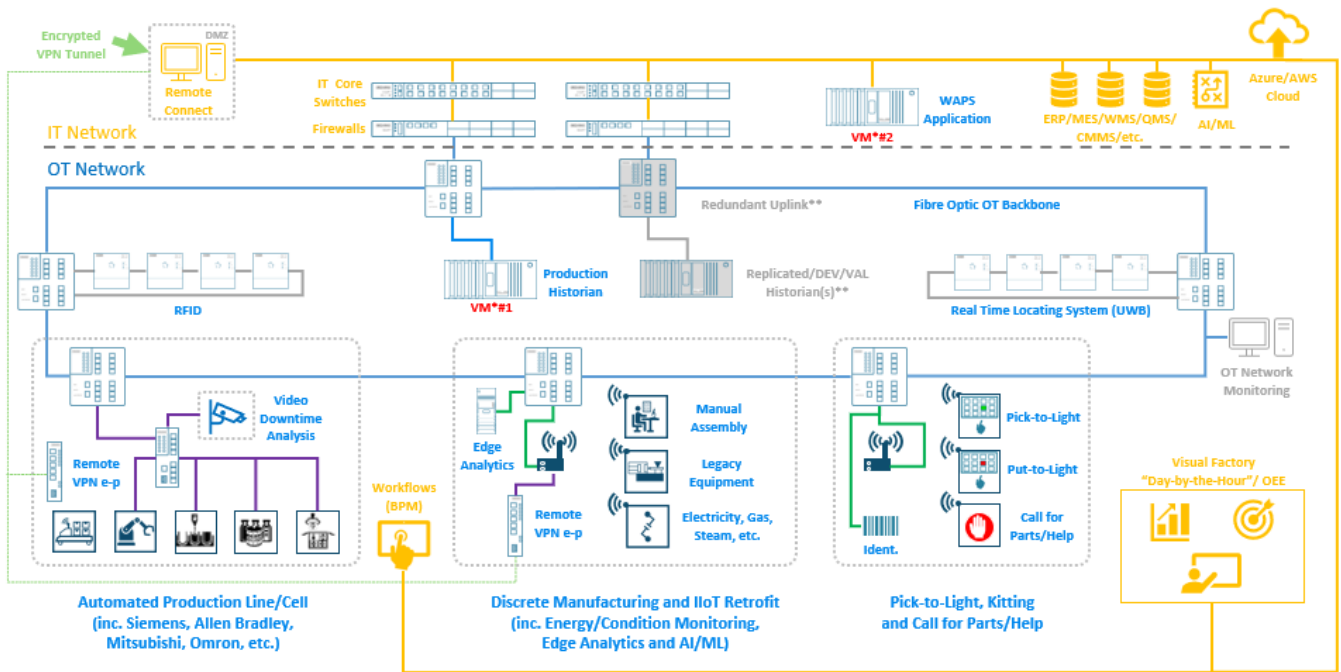

End-to-end solution (including)

- Cybersecurity consultancy
- Industrial Network Design
- Industrial Firewalls
- Managed Routers and Switches
- Industrial PoE Switches
- Unmanaged industrial Switches
- VPN and Secure Remote Access
- NAT Devices

Specialised Antennas

- High-gain antennas
- Clean-design antennas
- Directional and Omni-directional

SIEMENS




SnapSignal Convertors

Convert any existing sensor to Modbus for integration with data collection system

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

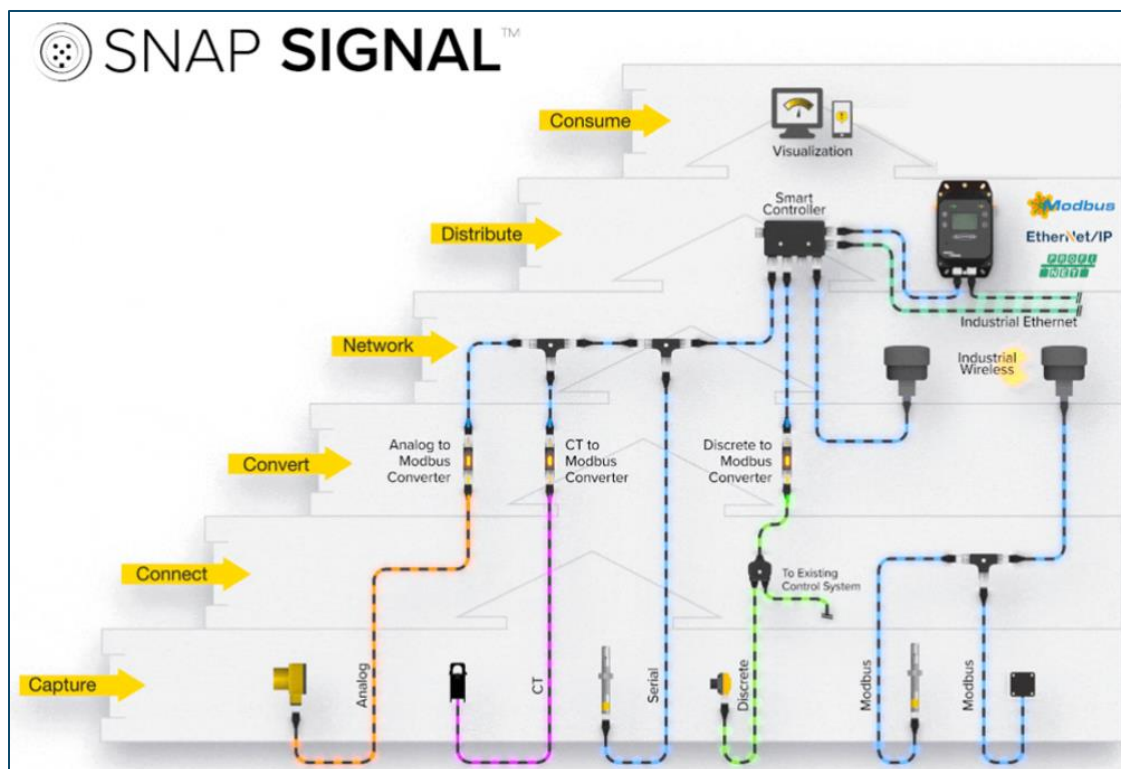

[Link to SnapSignal Video](#)

Range of M12 Converters (including)

- Digital to Modbus
- Analogue to Modbus
- Thermistor to Modbus
- Current Transformer to Modbus

Range of M12 Splitters (including)

- T-Splitter
- 2-way Splitter
- 8-port Splitter

Industrial Wireless

- Serial Data Radios



BANNER




Smart Installation Solutions

Innovative solutions engineered for quick and efficient deployment

Power Bus - allows you to quickly add wireless nodes anywhere along a 24V power line, minimizing cabling and maximizing flexibility



Distributed IO-Link - for rapid deployment of flexible RFID and Barcode verification solutions

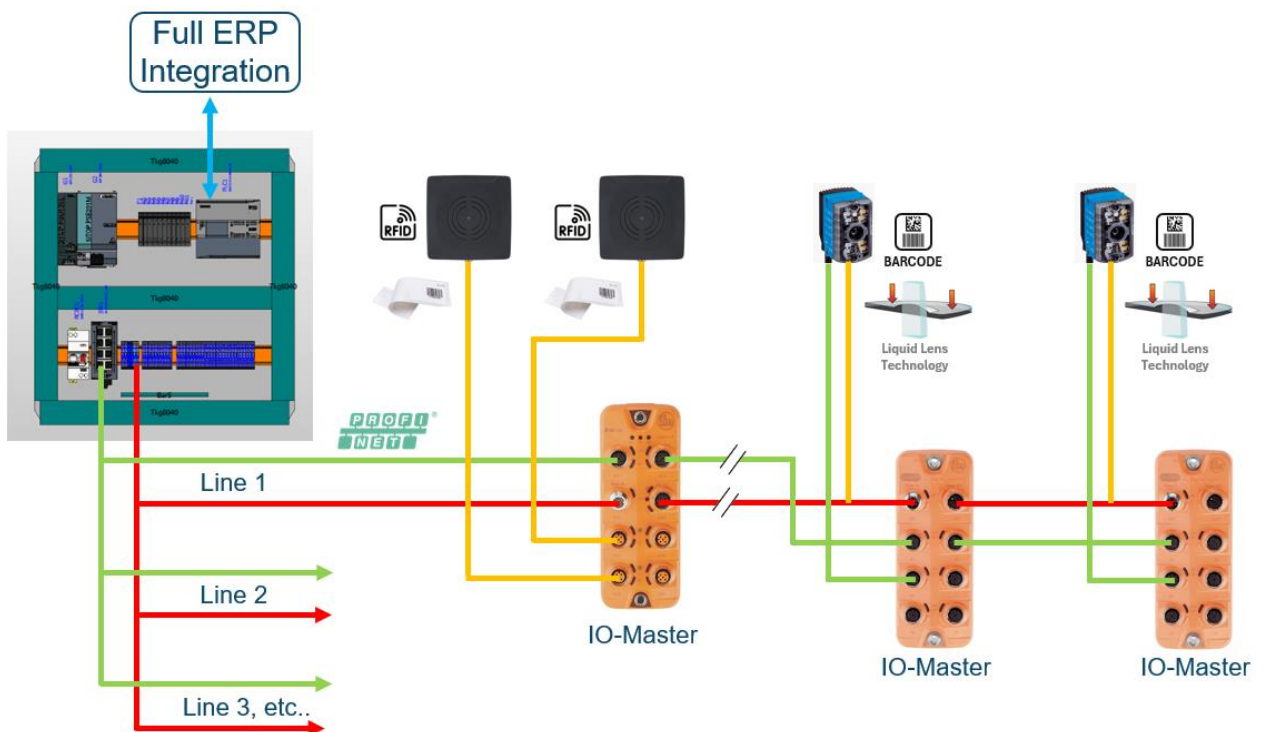

Smart Installation Solutions

Accelerate your success with rapidly deployed innovations

Wireless IO-Link - enables reliable industrial communication between the IO-Link Wireless master and hubs. The highly scalable system ensures a reliable real-time data exchange in challenging environments.



Wireless IO-Link at a glance

- Wireless communication up to 20 m
- Up to 64 IO-Link devices per master
- Interference-free frequency hopping
- Data transmission with short delay time
- IIOT integration (OPC-UA, MQTT, REST API)
- Fieldbus integration
- Compact IP67 design
- Interlinking to reduce the power cabling

Wireless IO-Link Hubs - for rapid integration of multiple IO-Link devices



Benefits

- Up to 75% less wiring
- Simplified installation
- Automated parameter setting
- Enhanced diagnostics



Pick-to-Light, Call-for-Parts and Call-for-Help

SmartFactory's Pick-to-Light and Call-for-Parts solutions streamline manual operations by guiding operators visually, confirming actions, and speeding up kitting/Kanban operations.



Range of Pick-to-Light and Call-for-Parts hardware (including)

- Touch Sensor and Optical Sensor with 3-digit LED Display
- Optical Pick-to-Light sensor
- Multicolour Touch with IO-Link
- Wireless Gateway

[Link to Pick-to-Light Video](#)

Call-for-Help hardware (including)

- Wireless buttons
- Record and analyse technician response times
- Record and analyse issue resolution times



Installation examples

New and legacy equipment in medical device, pharmaceutical, food and general manufacturing



Injection Moulding



Thermoforming

Wireless
Connectivity



End-of-Line Packaging



Process Equipment

Wired
Connectivity



Device Test Skid



Data Logger



Manual Assembly



Company Overview

SMARTFACTORY

EFFICIENCY THROUGH INNOVATION

We understand manufacturing:

SmartFactory is led by a strong experienced team of engineers, with more than 25 years of experience in the manufacture of FMCG's, Medical Devices and Electronics.



Modular & Scalable:

The modular solution includes:

OEE/Downtime Analysis ✓

Data Visualisation ✓

Data Analytics/AI ✓

Digital Workflows ✓

Condition Monitoring ✓

Real-Time Locating ✓

Pick-to-Light ✓

Energy Monitoring ✓

Digital Daily Management System ✓



The SmartFactory team can provide an end-to-end solution including IIoT readiness assessment, business value and RoI appraisal, design, engineering consultancy, validation and industry-proven hardware.

"The SmartFactory data collection initiative is the best I have seen, in all my time in finance"

Senior Finance Executive visiting the Irish manufacturing site

Working with world-class clients:

Boston Scientific

Teleflex
MEDICAL OEM

stryker

J&J

P&G

SIEMENS
Healthineers

GE Power

Pfizer

DANONE

SteriPack

DAWN
FARMS

Baker Hughes

In the
regions:

following



World-class
partners:

Approved
Distribution
Partner

SIEMENS



LINE SPEX
INDUSTRIAL VISION SYSTEMS

SICK
Sensor Intelligence.

RITTAL

TURCK | BANNER

System Solution Partner

SMARTFACTORY

NEXUS Innovation Centre
University of Limerick
Limerick V94 NYD3
Ireland
+353 61 518 443



www.smartfactory.ie

