شركة سمو لتجارة المصاعد

SMOU LIFTS

TRADING COMPANY

# TECHNICAL SUBMITTAL

# FUJI

MONADRIVE®

蒙 纳 驱 动

# MQ270

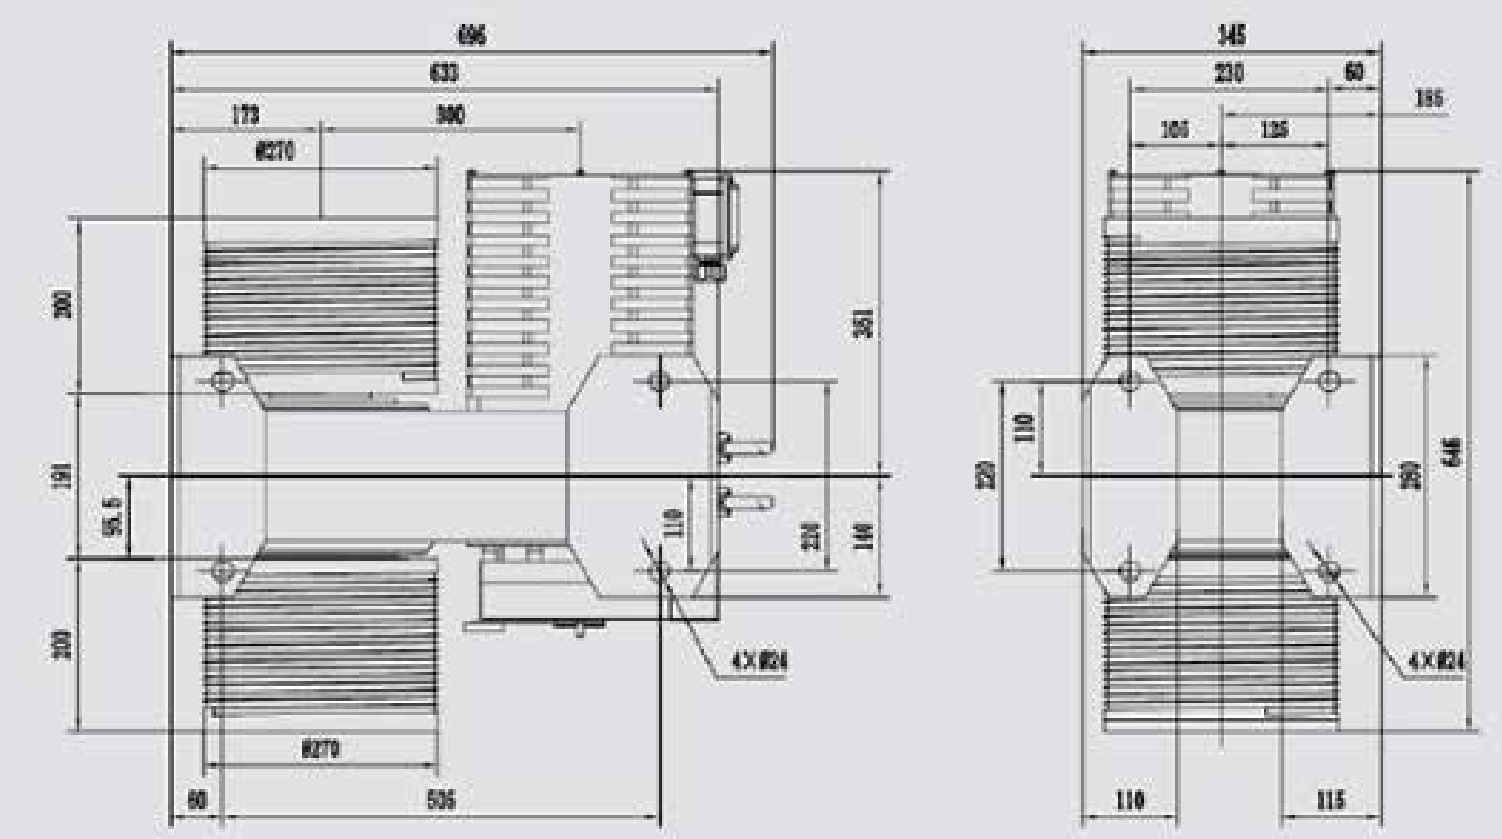

安装尺寸图
DIMENSIONS

## 规格表 / SPEC . SHEET

| 型号 | 电梯载重+轿厢 | 额定梯速 | 减速比 | 曳引轮节径 | 电源电压 | 电机转速 | 电机频率 | 电机电流 | 电机功率 | 电机转矩 | 曳引轮转矩 | 电机极数 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | Load(P+Q) | Elv Speed | Reduction Ratio | Sheave Dia | Voltage | Speed | Freq | Current | Power | Torque | SheeveTorque | Poles |
| | kg | m/s | | mm | V | r/min | Hz | A | kW | N.m | N.m | |
| MQ270 | 600 | 0.3 | 1:8 | 270 | 220/380 | 170 | 22.7 | 7 | 1.8 | 100 | 800 | 16 |
| MQ270 | 700 | 0.3 | 1:8 | 270 | 220/380 | 170 | 22.7 | 8 | 2.1 | 120 | 960 | 16 |
| MQ270 | 800 | 0.3 | 1:8 | 270 | 220/380 | 170 | 22.7 | 9 | 2.4 | 130 | 1040 | 16 |
| MQ270 | 900 | 0.3 | 1:8 | 270 | 220/380 | 170 | 22.7 | 10 | 2.7 | 150 | 1200 | 16 |
| MQ270 | 1000 | 0.3 | 1:8 | 270 | 220/380 | 170 | 22.7 | 12 | 3 | 170 | 1360 | 16 |
| MQ270 | 600 | 0.4 | 1:8 | 270 | 220/380 | 226 | 30.1 | 9 | 2.4 | 100 | 800 | 16 |
| MQ270 | 700 | 0.4 | 1:8 | 270 | 220/380 | 226 | 30.1 | 11 | 2.8 | 12[illegible] | 960 | 16 |
| MQ270 | 800 | 0.4 | 1:8 | 270 | 220/380 | 226 | 30.1 | 12 | 3.2 | 130 | 1040 | 16 |
| MQ270 | 900 | 0.4 | 1:8 | 270 | 220/380 | 226 | 30.1 | 14 | 3.5 | 150 | 1200 | 16 |
| [illegible]270 | 1000 | 0.4 | 1:8 | 270 | 220/380 | 226 | 30.1 | 16 | 4 | 170 | 1360 | 16 |

# MONA200

| Code | Capacity(KGS) | Speed(m/s) | Power(KW) | Traction Sheave(mm) | Travel Height |
|---|---|---|---|---|---|
| 41T-ERS | 320 | 1 | 2.2 | Φ320*3*Φ8*12 | < =80 |
| | | 1.5 | 3.3 | | |
| | | 1.6 | 3.5 | | |
| | | 1.75 | 3.8 | | |
| | 450 | 1 | 3 | Φ320*4*Φ8*12 | |
| | | 1.5 | 4.5 | | |
| | | 1.6 | 4.8 | | |
| | | 1.75 | 5.3 | | |
| | 630 | 1 | 4 | Φ240*7*Φ6.5*12 | < =80 |
| | | 1.5 | 6 | | |
| | | 1.6 | 6.4 | | |
| | | 1.75 | 7 | | |
| 41T-ER2D | 800 | 1 | 5.6 | Φ320*3*Φ8*12 | < =80 |
| | 800 | 1.5 | 8.4 | | |
| | 800 | 1.6 | 9 | | |
| | 800 | 1.75 | 9.8 | | |
| | 1000 | 1 | 6.9 | Φ320*7*Φ8*12 | |
| | 1000 | 1.5 | 10.3 | | |
| | 1000 | 1.6 | 11 | | |
| | 1000 | 1.75 | 12 | | |
| 41T-ER3D | 1150 | 1 | 7.8 | Φ320*8*Φ8*12 | < =80 |
| | 1150 | 1.5 | 11.8 | | |
| | 1150 | 1.6 | 12.7 | | |
| | 1150 | 1.75 | 13.8 | | |
| | 1250 | 1 | 8.5 | | |
| | 1250 | 1.5 | 12.7 | | |
| | 1250 | 1.6 | 13.8 | | |
| | 1250 | 1.75 | 14.9 | | |

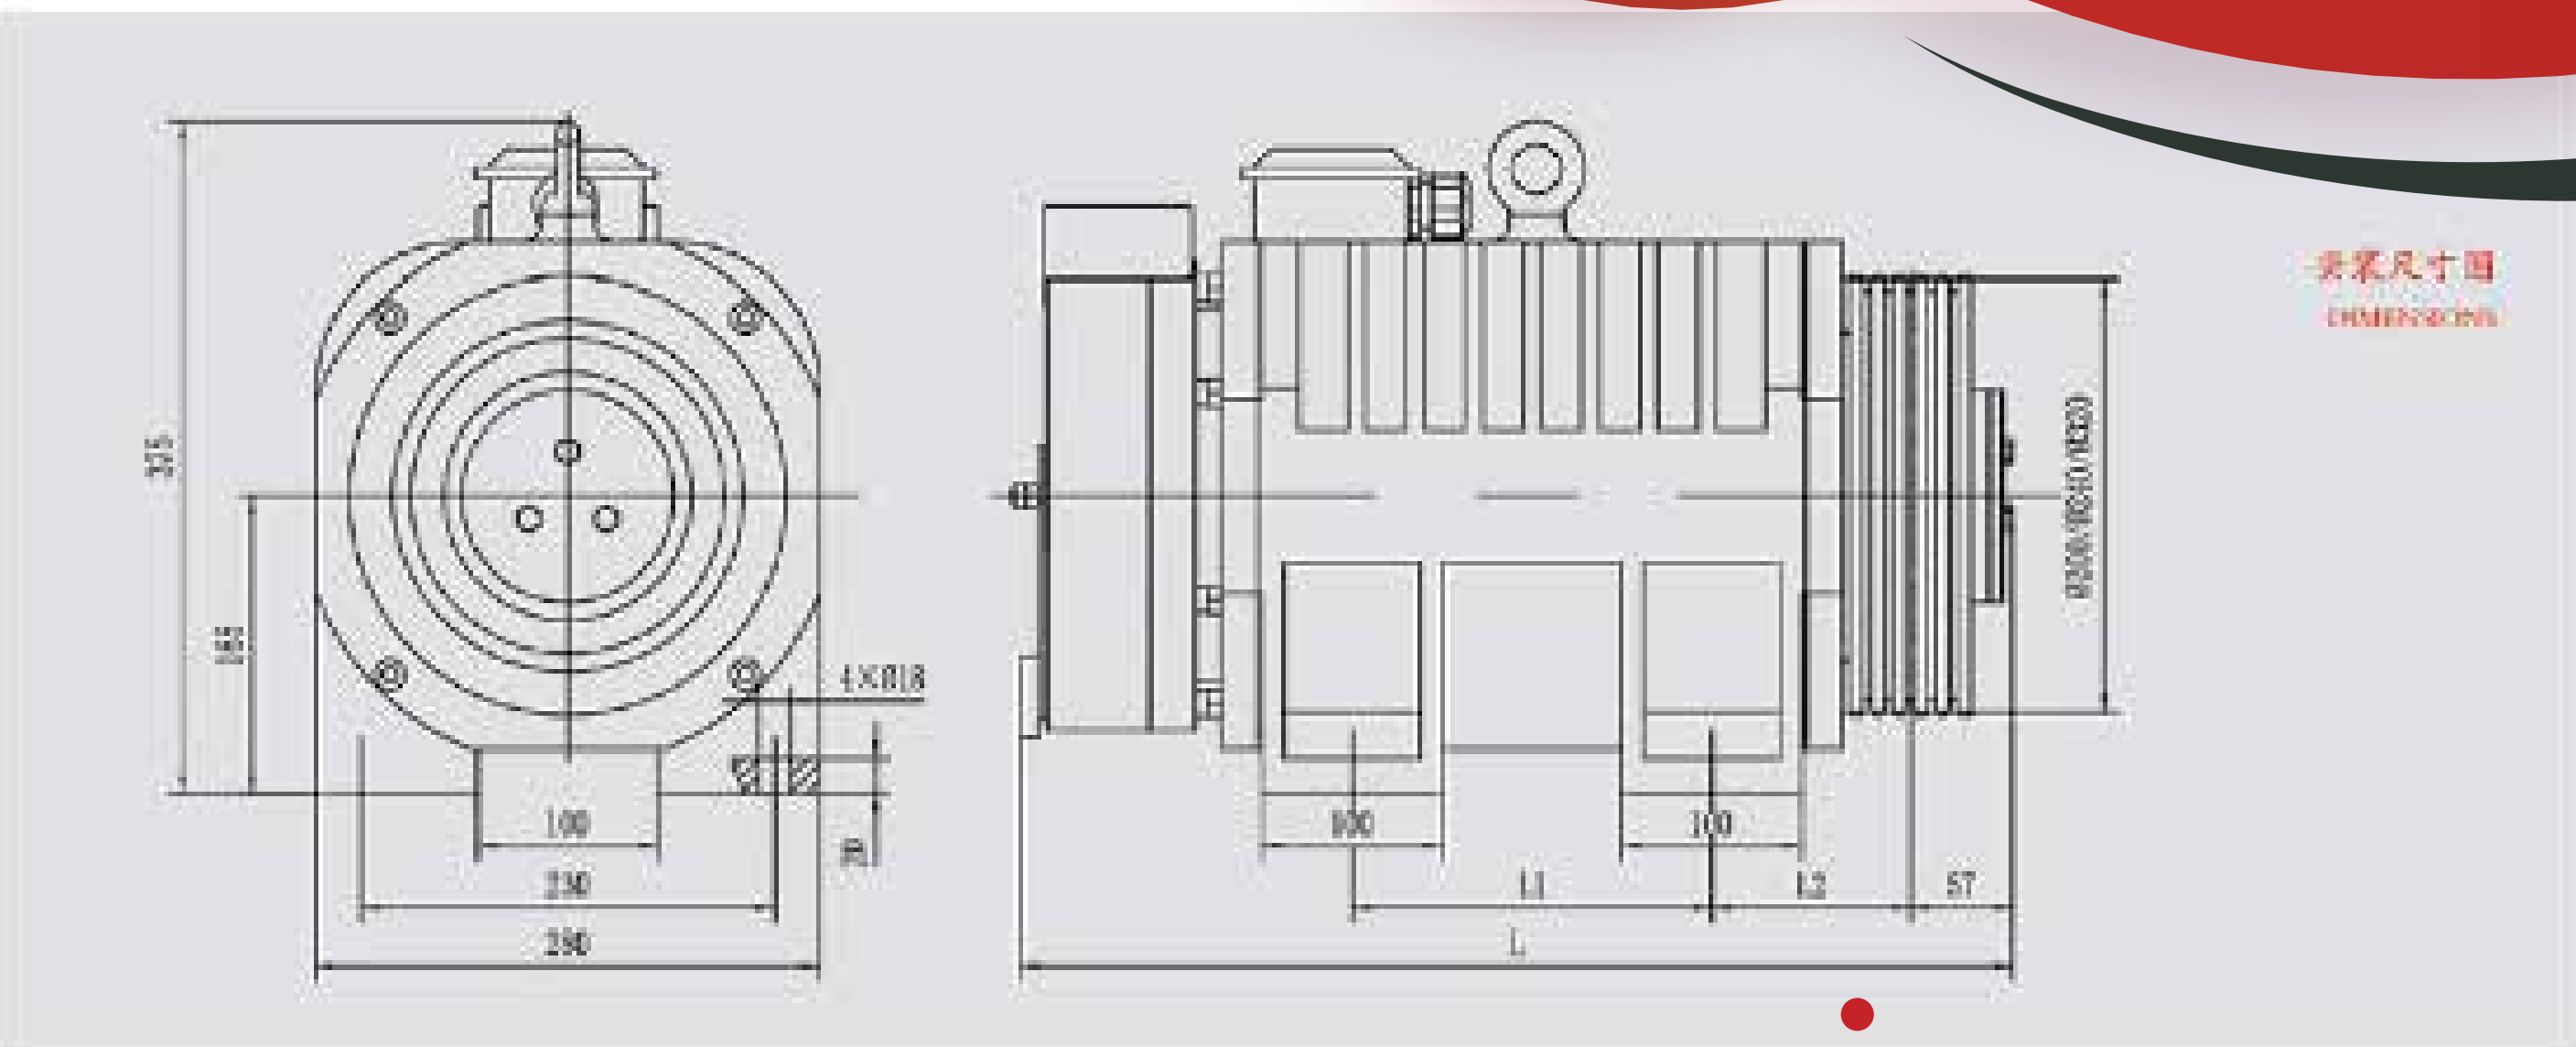


## 规格表 / SPEC . SHEET

| 型号 Type | 悬挂比 Roping | 规格 Spec | 电梯载重 Elv Load kg | 额定梯速 Elv Speed m/s | 曳引轮直径 Sheave Dia mm | 曳引轮绳槽 Sheave Groove | 额定电压 Voltage V | 额定电流 Current A | 额定功率 Power kW | 额定转速 Speed r/min | 额定频率 Freq Hz | 额定转矩 Torque N.m | 电机极数 Poles | L mm | L1 mm | L2 mm | 推荐包角 °|
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MONA200 | 2:1 | 320-0.4-1 | 320 | 0.4 | 200 | 3×Φ8×12 | 220<br>380 | 4<br>2 | 0.9 | 76 | 15.2 | 110 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 400-0.4-1 | 400 | 0.4 | 200 | 4×Φ8×12 | 220<br>380 | 5<br>3 | 1.1 | 76 | 15.2 | 140 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 450-0.4-1 | 450 | 0.4 | 200 | 4×Φ8×12 | 220<br>380 | 6<br>3 | 1.2 | 76 | 15.2 | 150 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 320-0.4-2 | 320 | 0.4 | 240 | 3×Φ8×12 | 220<br>380 | 5<br>3 | 0.9 | 64 | 12.8 | 130 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 400-0.4-2 | 400 | 0.4 | 240 | 4×Φ8×12 | 220<br>380 | 6<br>3 | 1.1 | 64 | 12.8 | 160 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 450-0.4-2 | 450 | 0.4 | 240 | 4×Φ8×12 | 220<br>380 | 7<br>4 | 1.2 | 64 | 12.8 | 180 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 1:1 | 320-0.4-3 | 320 | 0.4 | 200 | 4×Φ8×12 | 220<br>380 | 5<br>3 | 0.9 | 38 | 7.6 | 220 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 1:1 | 400-0.4-3 | 400 | 0.4 | 200 | 5×Φ8×12 | 220<br>380 | 6<br>4 | 1.1 | 38 | 7.6 | 270 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 1:1 | 450-0.4-3 | 450 | 0.4 | 200 | 5×Φ8×12 | 220<br>380 | 7<br>4 | 1.2 | 38 | 7.6 | 300 | 24 | 520 | 150 | 110.5 | 90 |
| MONA200 | 1:1 | 320-0.4-4 | 320 | 0.4 | 240 | 4×Φ8×12 | 220<br>380 | 6<br>4 | 0.9 | 32 | 6.4 | 260 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 1:1 | 400-0.4-4 | 400 | 0.4 | 240 | 5×Φ8×12 | 220<br>380 | 7<br>4 | 1.1 | 32 | 6.4 | 320 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 1:1 | 450-0.4-4 | 450 | 0.4 | 240 | 5×Φ8×12 | 220<br>380 | 8<br>5 | 1.2 | 32 | 6.4 | 360 | 24 | 570 | 200 | 110.5 | |
| MONA200 | 2:1 | 320-0.5-1 | 320 | 0.5 | 320 | 3×Φ8×12 | 380 | 4 | 1.1 | 60 | 12.0 | 170 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 320-0.63-1 | 320 | 0.63 | 320 | 3×Φ8×12 | 380 | 4 | 1.3 | 75 | 15.0 | 170 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 320-1.0-1 | 320 | 1.0 | 320 | 3×Φ8×12 | 380 | 6 | 2.1 | 119 | 23.8 | 170 | 24 | 430 | 100 | 100.5 | |
| MONA200 | 2:1 | 400-0.5-1 | 400 | 0.5 | 320 | 4×Φ8×12 | 380 | 5 | 1.4 | 60 | 12.0 | 220 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 400-0.63-1 | 400 | 0.63 | 320 | 4×Φ8×12 | 380 | 5 | 1.7 | 75 | 15.0 | 220 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 400-1.0-1 | 400 | 1.0 | 320 | 4×Φ8×12 | 380 | 8 | 2.7 | 119 | 23.8 | 220 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 450-0.5-1 | 450 | 0.5 | 320 | 4×Φ8×12 | 380 | 6 | 1.5 | 60 | 12.0 | 240 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 450-0.63-1 | 450 | 0.63 | 320 | 4×Φ8×12 | 380 | 6 | 1.9 | 75 | 15.0 | 240 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 450-1.0-1 | 450 | 1.0 | 320 | 4×Φ8×12 | 380 | 9 | 3 | 119 | 23.8 | 240 | 24 | 520 | 150 | 110.5 | |
| MONA200 | 2:1 | 630-0.5-1 | 630 | 0.5 | 320 | 5×Φ8×12 | 380 | 8 | 2.1 | 60 | 12.0 | 340 | 24 | 570 | 200 | 110.5 | |
| MONA200 | 2:1 | 630-0.63-1 | 630 | 0.63 | 320 | 5×Φ8×12 | 380 | 8 | 2.7 | 75 | 15.0 | 340 | 24 | 570 | 200 | 110.5 | |
| MONA200 | 2:1 | 630-1.0-1 | 630 | 1.0 | 320 | 5×Φ8×12 | 380 | 11 | 4.2 | 119 | 23.8 | 340 | 24 | 570 | 200 | 110.5 | |
| MONA200 | 2:1 | 630-1.5-1 | 630 | 1.5 | 320 | 5×Φ8×12 | 380 | 16 | 6.4 | 179 | 35.8 | 340 | 24 | 570 | 200 | 110.5 | |

MONADRIVE ®

蒙 纳 驱 动

| | |
|---|---|
| Voltage | 380V |
| Roping | 2:1 |
| Elv. Load | 1250-1600kg |
| Elv. Speed | 0.5-2.5m/s |
| Sheave Diam | 400mm / 480mm |
| Starts Per Hour | 240st/h |
| Max. Static Load | 6000kg |
| Weight | 510kg |

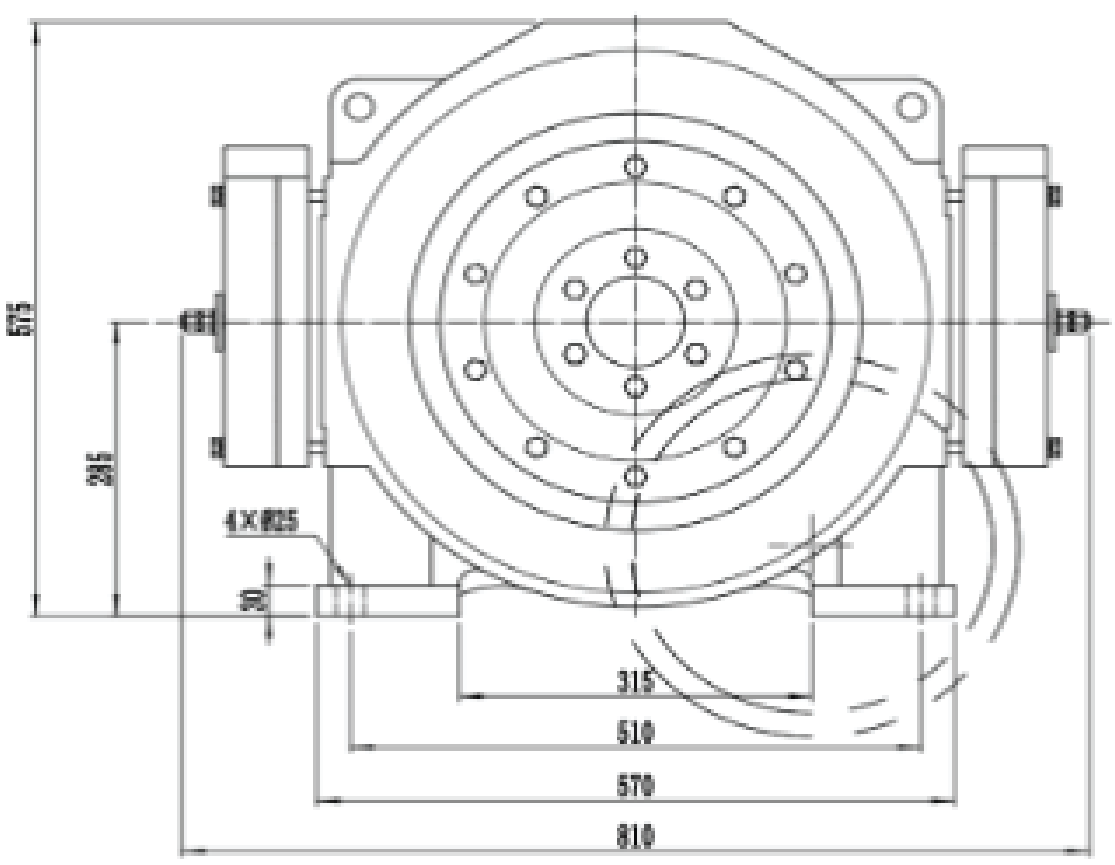


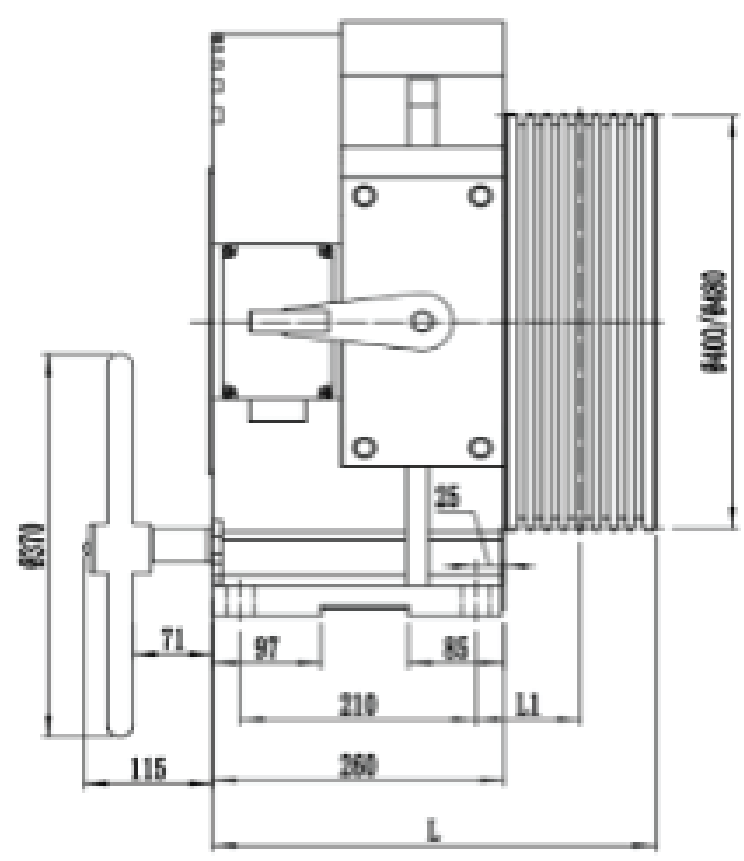


Spec. Sheet

| Type | Spec | Elv Load kg | Elv Speed m/s | Sheave Diam mm | Sheave Groove | Current A | Power kW | Speed r/min | Freq Hz | Torque N.m | Poles | mm | mm |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MCK300 | 1250-0.5A | 1250 | 0.5 | 400 | 6×Φ10×15 | 13 | 4.3 | 48 | 12.8 | 850 | 32 | 381 | 86 |
| MCK300 | 1250-1.0A | 1250 | 1.0 | 400 | 6×Φ10×15 | 20 | 8.5 | 95 | 25.3 | 850 | 32 | 381 | 86 |
| MCK300 | 1250-1.5A | 1250 | 1.5 | 400 | 6×Φ10×15 | 34 | 12.7 | 143 | 38.1 | 850 | 32 | 381 | 86 |
| MCK300 | 1250-1.75A | 1250 | 1.75 | 400 | 6×Φ10×15 | 34 | 14.9 | 167 | 44.5 | 850 | 32 | 381 | 86 |
| MCK300 | 1250-2.0A | 1250 | 2.0 | 400 | 6×Φ10×15 | 38 | 17.0 | 191 | 50.9 | 850 | 32 | 381 | 86 |
| MCK300 | 1250-2.5A | 1250 | 2.5 | 480 | 7×Φ10×15 | 45 | 21.3 | 199 | 53.1 | 1020 | 32 | 381 | 86 |
| MCK300 | 1350-0.5A | 1350 | 0.5 | 400 | 7×Φ10×15 | 14 | 4.6 | 48 | 12.8 | 920 | 32 | 381 | 86 |
| MCK300 | 1350-1.0A | 1350 | 1.0 | 400 | 7×Φ10×15 | 21 | 9.2 | 95 | 25.3 | 920 | 32 | 381 | 86 |
| MCK300 | 1350-1.5A | 1350 | 1.5 | 400 | 7×Φ10×15 | 36 | 13.8 | 143 | 38.1 | 920 | 32 | 381 | 86 |
| MCK300 | 1350-1.75A | 1350 | 1.75 | 400 | 7×Φ10×15 | 36 | 16.1 | 167 | 44.5 | 920 | 32 | 381 | 86 |
| MCK300 | 1350-2.0A | 1350 | 2.0 | 400 | 7×Φ10×15 | 40 | 18.4 | 191 | 50.9 | 920 | 32 | 381 | 86 |
| MCK300 | 1350-2.5A | 1350 | 2.5 | 480 | 7×Φ10×15 | 52 | 22.9 | 199 | 53.1 | 1100 | 32 | 381 | 86 |
| MCK300 | 1600-0.5A | 1600 | 0.5 | 400 | 7×Φ10×15 | 18 | 5.6 | 48 | 12.8 | 1110 | 32 | 381 | 86 |
| MCK300 | 1600-1.0A | 1600 | 1.0 | 400 | 7×Φ10×15 | 26 | 11.0 | 95 | 25.3 | 1110 | 32 | 381 | 86 |
| MCK300 | 1600-1.5A | 1600 | 1.5 | 400 | 8×Φ10×15 | 41 | 16.6 | 143 | 38.1 | 1110 | 32 | 396 | 93.5 |
| MCK300 | 1600-1.75A | 1600 | 1.75 | 400 | 8×Φ10×15 | 41 | 19.4 | 167 | 44.5 | 1110 | 32 | 396 | 93.5 |
| MCK300 | 1600-2.0A | 1600 | 2.0 | 400 | 8×Φ10×15 | 47 | 22.2 | 191 | 50.9 | 1110 | 32 | 396 | 93.5 |

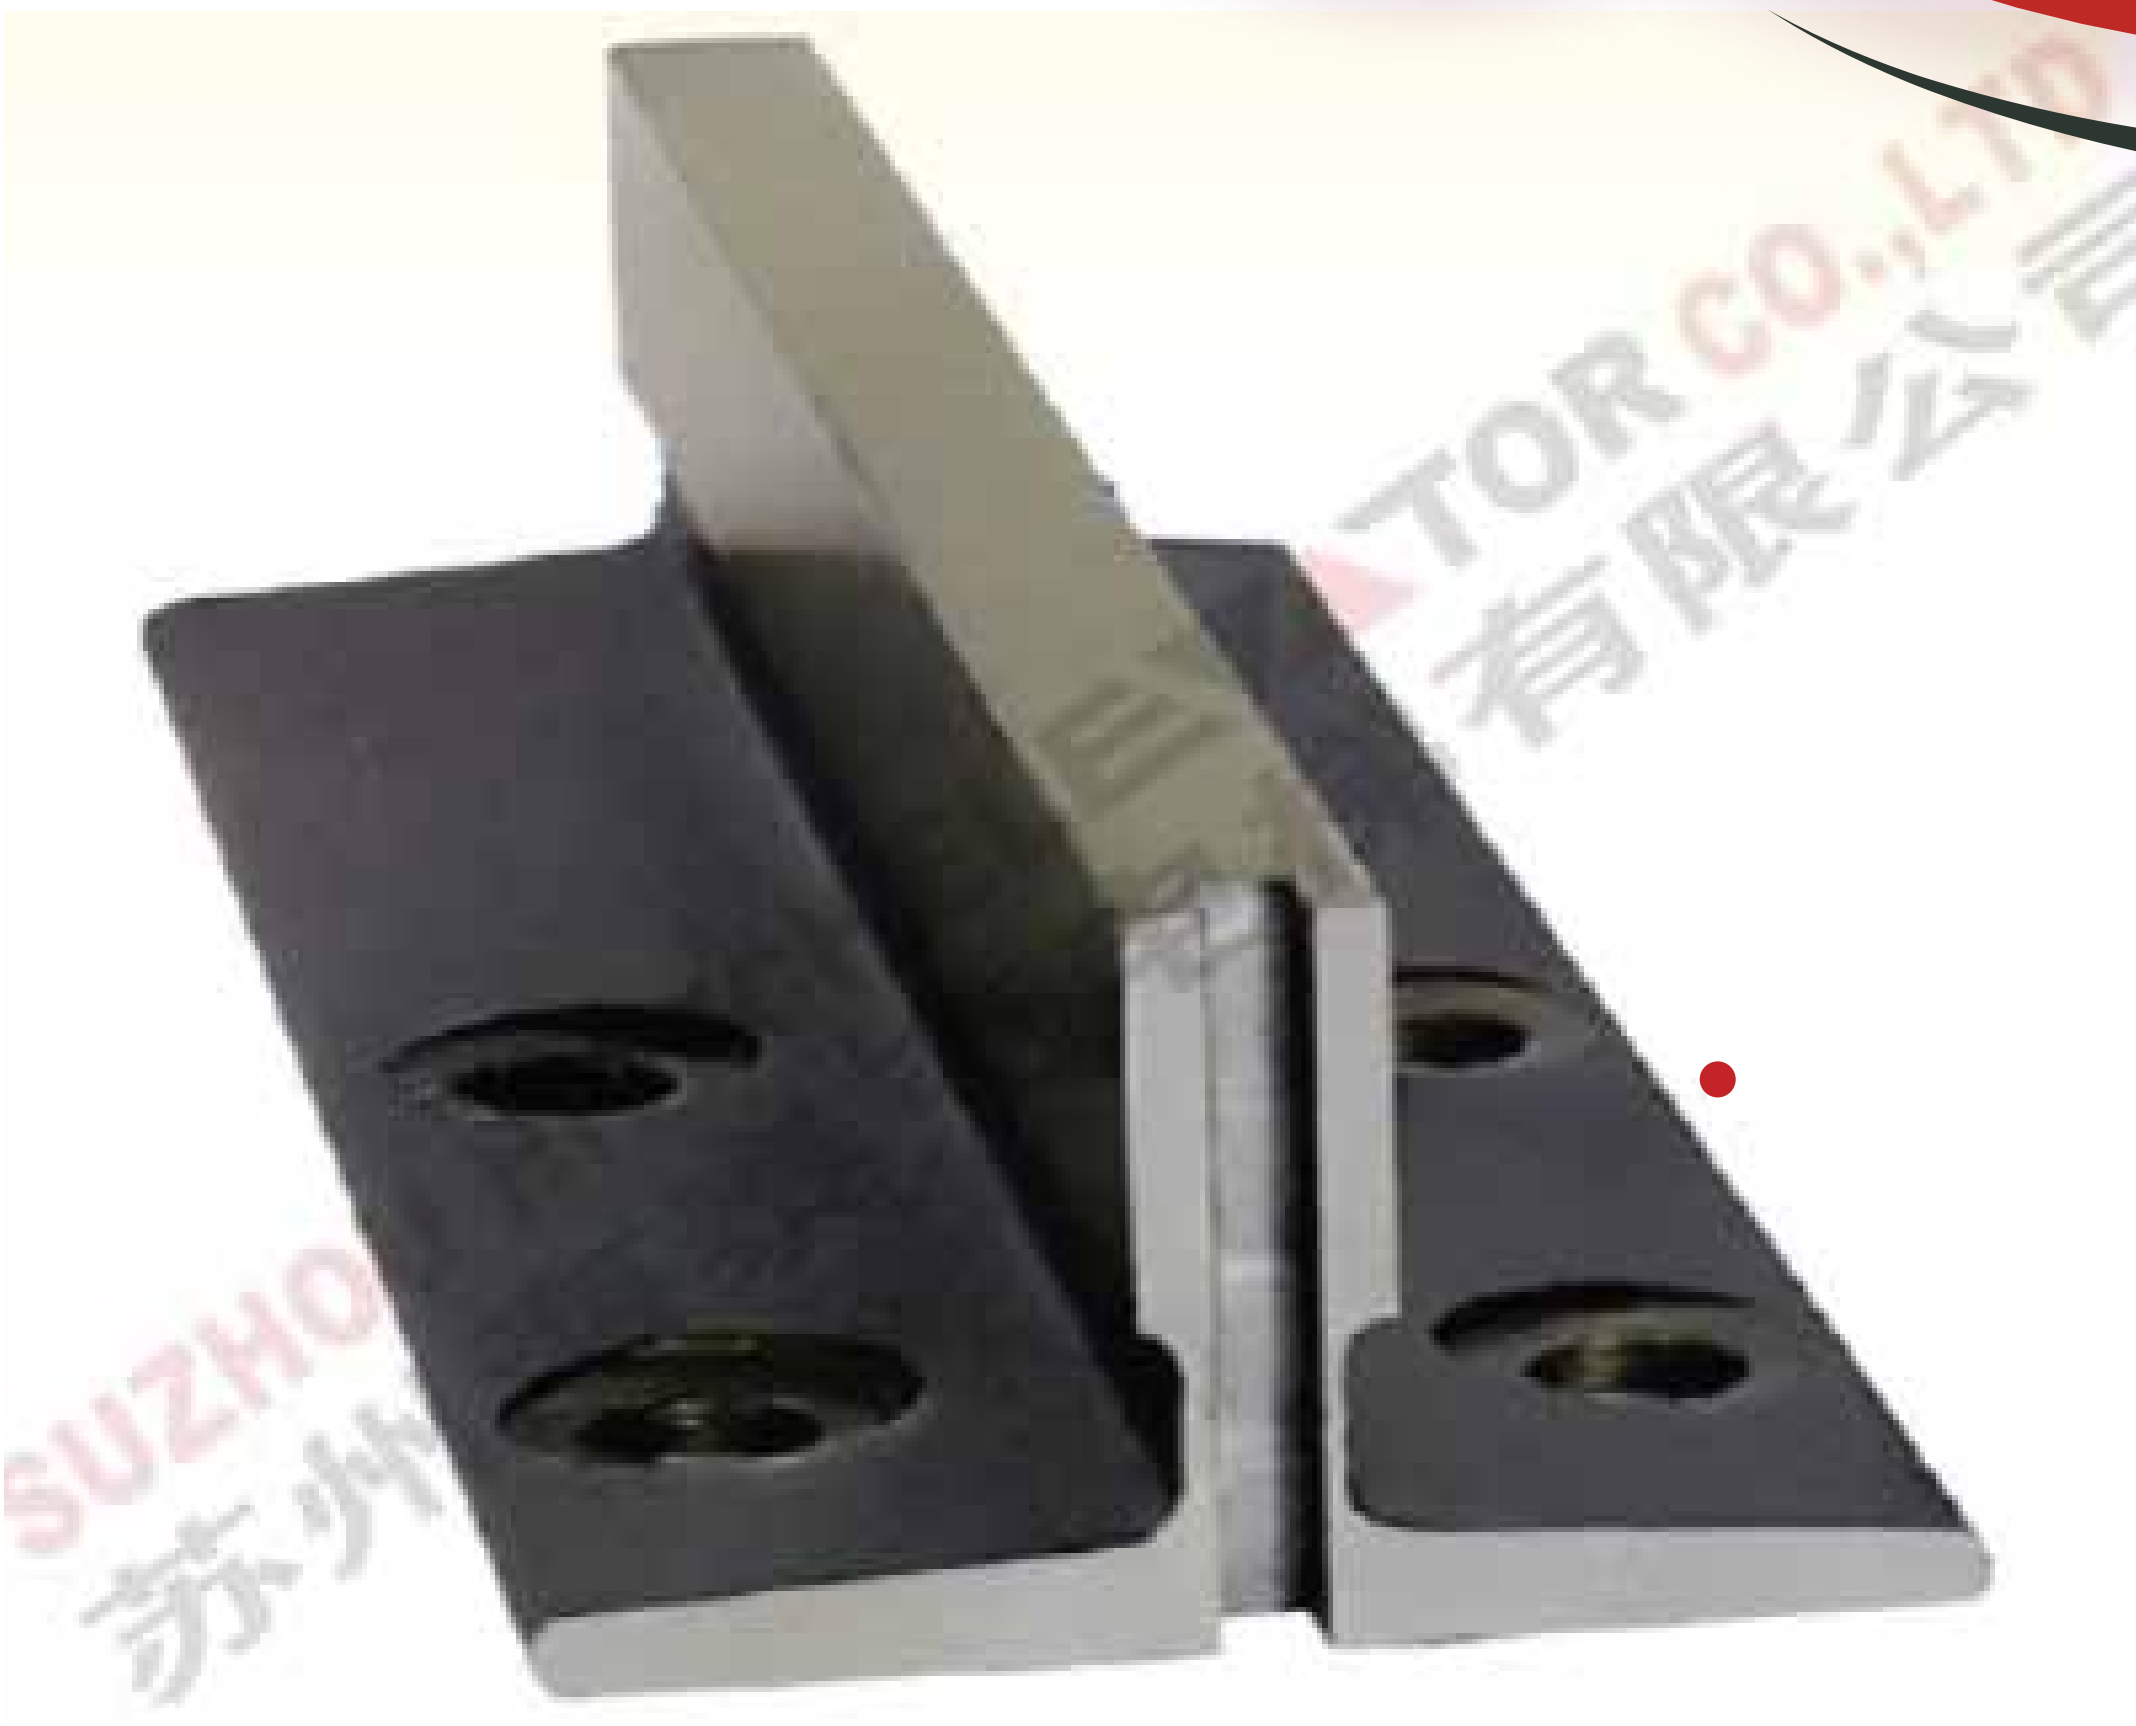

MACHINED GUIDE RAIL

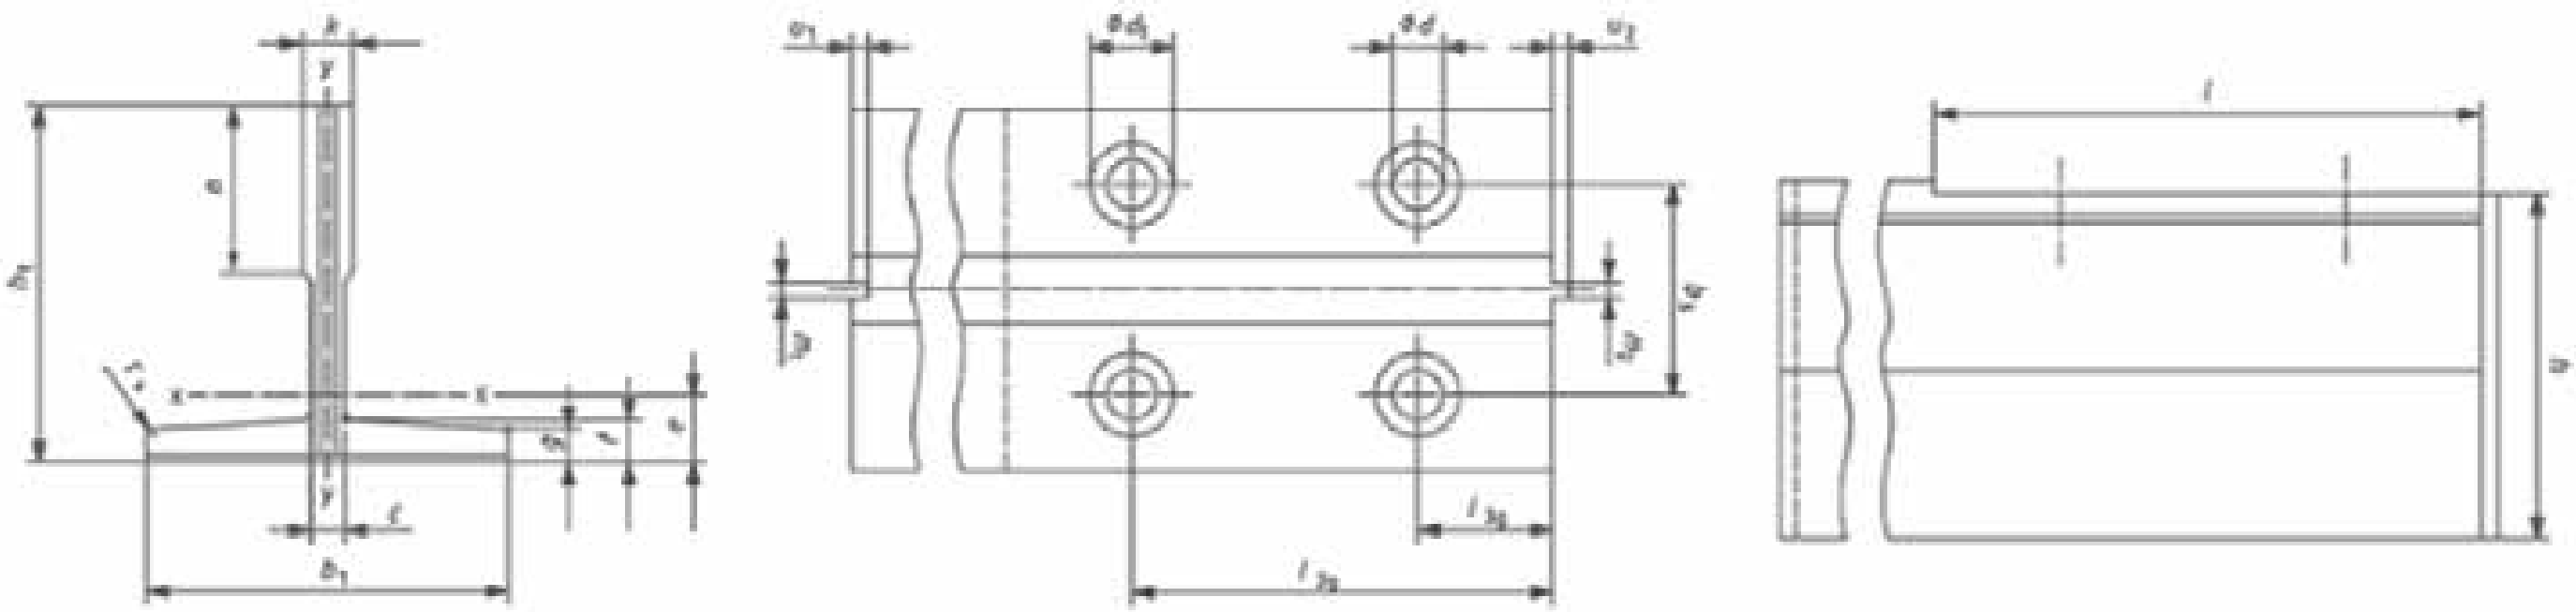

| | $b_1$ | $h_1$ | h | k | n | c | f | g | $r_s$ | $m_1$ | $m_2$ | $u_1$ | $u_2$ | d | $d_1$ | $b_3$ | $l_{2g}$ | $l_{3g}$ | l | h |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Tolerances(Standard) | ±1.5 | ±0.75 | ±0.1 | +0.1/0 | +3/0 | - | ±0.75 | ±0.75 | - | +0.06/0 | 0/-0.06 | ±0.10 | ±0.10 | - | - | ±0.2 | ±0.2 | ±0.2 | +3/0 | ±0.1 |
| T70-1/B | 70 | 65 | 64 | 9 | 34 | 6 | 8 | 6 | 1.5 | 3.00 | 2.97 | 3.50 | 3.00 | 13 | 26 | 42 | 105 | 25 | 128 | 64 |
| T75-3/B | 75 | 62 | 61 | 10 | 30 | 8 | 9 | 7 | 3 | 3.00 | 2.97 | 3.50 | 3.00 | 13 | 26 | 42 | 105 | 30 | 138 | 61 |
| T78/B | 78 | 56 | 55 | 10 | 26 | 7 | 8.5 | 6 | 2.5 | 3.00 | 2.97 | 3.50 | 3.00 | 13 | 26 | 42 | 105 | 38 | 138 | 55 |
| T82/B | 82 | 68.25 | 66.6 | 9 | 26 | 7.5 | 8.25 | 6 | 3 | 3.00 | 2.97 | 3.50 | 3.00 | 13 | 26 | 50.8 | 81 | 27 | 111 | 66.6 |
| T89/B | 89 | 62 | 61 | 16 | 34 | 10 | 11.1 | 7.9 | 3 | 6.40 | 6.37 | 7.14 | 6.35 | 13 | 26 | 57.2 | 114.3 | 38.1 | 156 | 61 |
| T90/B | 90 | 75 | 74 | 16 | 42 | 10 | 10 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 13 | 26 | 57.2 | 114.3 | 38.1 | 156 | 74 |
| T114/B | 114 | 89 | 88 | 16 | 38 | 9.5 | 11 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 70 | 114.3 | 38.1 | 156 | 88 |
| T127-1/B | 127 | 89 | 88 | 16 | 45 | 10 | 11 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 79.4 | 114.3 | 38.1 | 156 | 88 |
| T127-2/B | 127 | 89 | 88 | 16 | 51 | 10 | 15.9 | 12.7 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 79.4 | 114.3 | 38.1 | 156 | 88 |
| T140-1/B | 140 | 108 | 107 | 19 | 51 | 12.7 | 15.9 | 12.7 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 107 |
| T140-2/B | 140 | 102 | 101 | 28.6 | 51 | 17.5 | 17.5 | 14.5 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 101 |
| T140-3/B | 140 | 127 | 126 | 31.75 | 57 | 19 | 25.4 | 17.5 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 126 |

Note: Dimensions $l_{2g}$, $l_{3g}$, d, $b_3$, are indentical to and have the same tolerances as fishplate dimensions $l_{2f}$, $l_{3f}$, d, $b_3$.

### Machined Guide Rail - BE Class

Dimensions and Tolerances of High Precise Machined Guide Rails - ISO7465/GB-T22562/2008 (For Elevator Speed 1.6m/s~4m/s)

#### Dimensions

| Type | $b_1$ | $h_1$ | k | n | c | f | g | $r_s$ | $m_1$ | $m_2$ | $u_1$ | $u_2$ | d | $d_1$ | $b_3$ | $l_{2g}$ | $l_{3g}$ | l | h |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Tolerances(High Precise) | ±1.5 | ±0.75 | +0.05/0 | +3/0 | - | ±0.75 | ±0.75 | - | +0.03/0 | 0/-0.03 | ±0.10 | ±0.10 | - | - | ±0.2 | ±0.2 | ±0.2 | +3/0 | ±0.05 |
| T89/BE | 89 | 62 | 16 | 34 | 10 | 11.1 | 7.9 | 3 | 6.40 | 6.37 | 7.14 | 6.35 | 13 | 26 | 57.2 | 114.3 | 38.1 | 156 | 61 |
| T90/BE | 90 | 75 | 16 | 42 | 10 | 10 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 13 | 26 | 57.2 | 114.3 | 38.1 | 156 | 74 |
| T114/BE | 114 | 89 | 16 | 38 | 9.5 | 11 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 70 | 114.3 | 38.1 | 156 | 88 |
| T127-1/BE | 127 | 89 | 16 | 45 | 10 | 11 | 8 | 4 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 79.4 | 114.3 | 38.1 | 156 | 88 |
| T127-2/BE | 127 | 89 | 16 | 51 | 10 | 15.9 | 12.7 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 17 | 33 | 79.4 | 114.3 | 38.1 | 156 | 88 |
| T140-1/BE | 140 | 108 | 19 | 51 | 12.7 | 15.9 | 12.7 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 107 |
| T140-2/BE | 140 | 102 | 28.6 | 51 | 17.5 | 17.5 | 14.5 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 101 |
| T140-3/BE | 140 | 127 | 31.75 | 57 | 19 | 25.4 | 17.5 | 5 | 6.40 | 6.37 | 7.14 | 6.35 | 21 | 40 | 92.1 | 152.4 | 31.8 | 193 | 126 |

Note: Dimensions l2g, l3g, d, b3, are indentical to and have the same tolerances as fishplate dimensions l2f, l3f, d, b3.



| Type | $b_1$ | c | f | $h_1$ | $h_2$ | k | n | $r_1$ | a |
|---|---|---|---|---|---|---|---|---|---|
| Tolerances | ±1.00 | - | +0.20/-0.15 | 0/-0.5 | - | ±0.40 | - | - | +60/+20 |
| TK3 | 75 | 1.8 | 2.2 | 55±0.2 | - | 10±0.2 | 25 | 5 | 90° |
| TK5 | 87 | 1.8 | 3.0 | 60 | - | 16.4 | 25 | 3 | 90° |
| Tolerances | 0/-0.7 | - | +0.20/-0.15 | 0/-0.5 | ±1.00 | ±0.40 | - | - | +60/+20 |
| TK3A | 78 | 1.8 | 2.2 | 60 | 10 | 16.4 | 25 | 3 | 90° |
| TK5A | 78 | 1.8 | 3.2 | 60 | 10 | 16.4 | 25 | 3 | 90° |

Technical Characteristics Of Hollow Guide Rails - JG/T5072.3-1996



| Type | s | $q_1$ | e | $I_{x-x}$ | $W_{x-x}$ | $i_{x-x}$ | $I_{y-y}$ | $W_{y-y}$ | $i_{y-y}$ |
|---|---|---|---|---|---|---|---|---|---|
| | $cm^2$ | kg/m | cm | $cm^4$ | $cm^3$ | cm | $cm^4$ | $cm^3$ | cm |
| TK3 | 3.81 | 2.99 | 2.17 | 19.76 | 5.16 | 2.21 | 12.20 | 2.80 | 1.73 |
| TK5 | 5.86 | 4.60 | 2.15 | 26.90 | 6.99 | 2.08 | 18.61 | 4.28 | 1.73 |
| TK3A | 4.36 | 3.40 | 2.18 | 18.09 | 4.74 | 2.04 | 13.62 | 3.49 | 1.77 |
| TK5A | 6.17 | 4.85 | 2.14 | 24.33 | 6.30 | 1.99 | 18.78 | 4.82 | 1.74 |

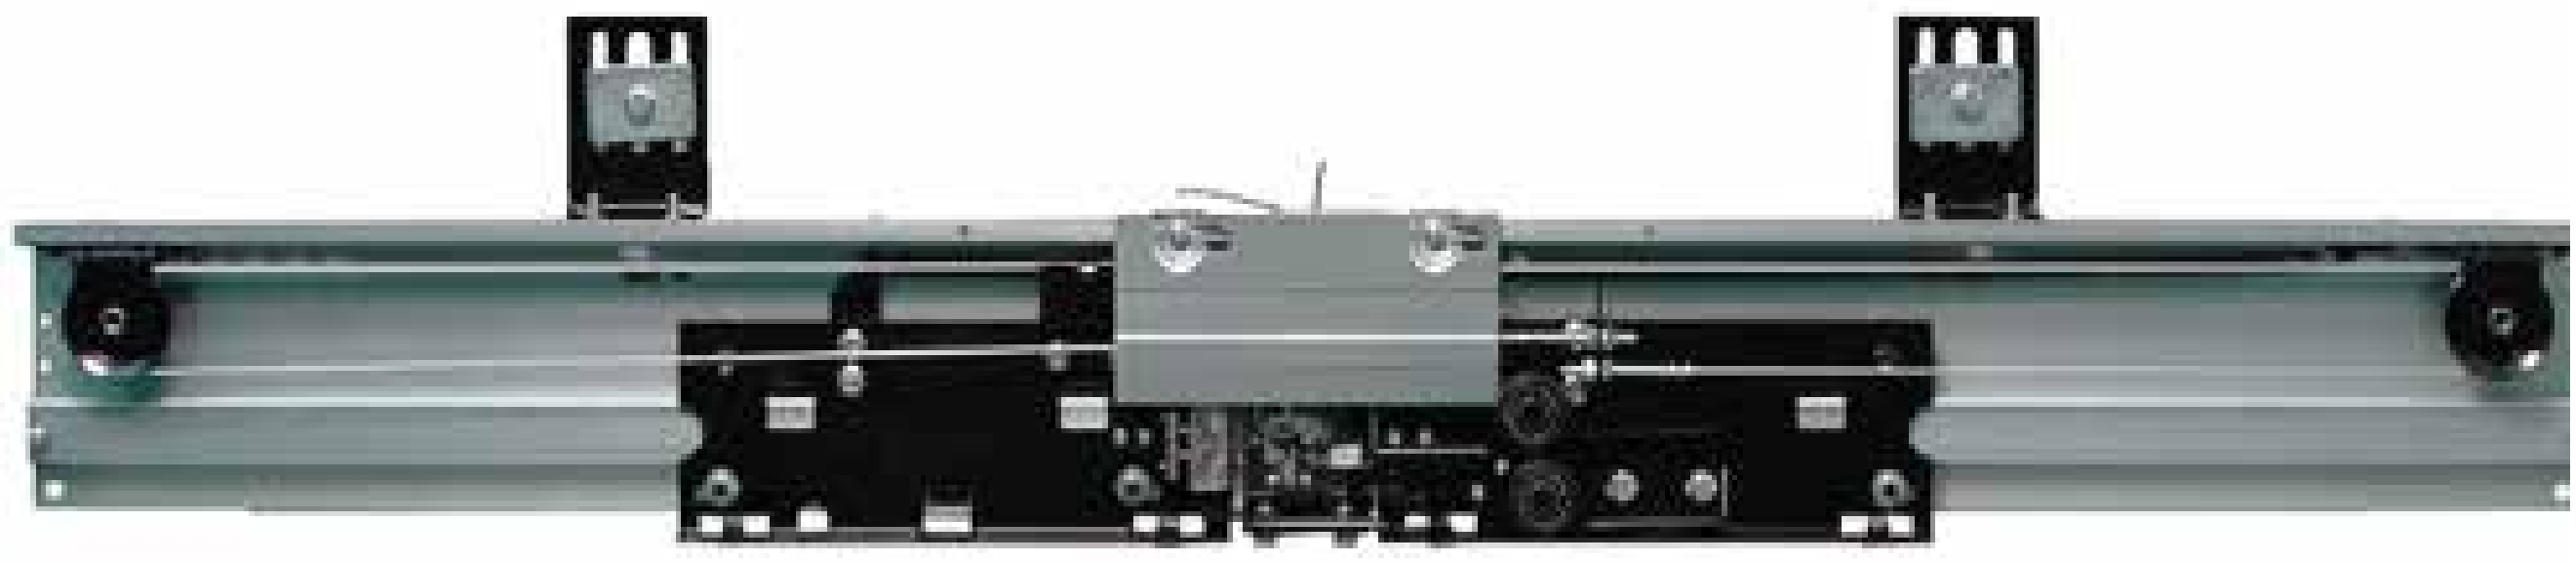

# Center Opening Landing Door Device

Product name : Center Opening Landing Door Mechanism

1) Landing door match for the door operator.

2) Door opening way: center opening and side opening.

3) Door opening width: 600-2200 mm, height: 2000 or 2100mm.

4) Door panels, sill & door frame

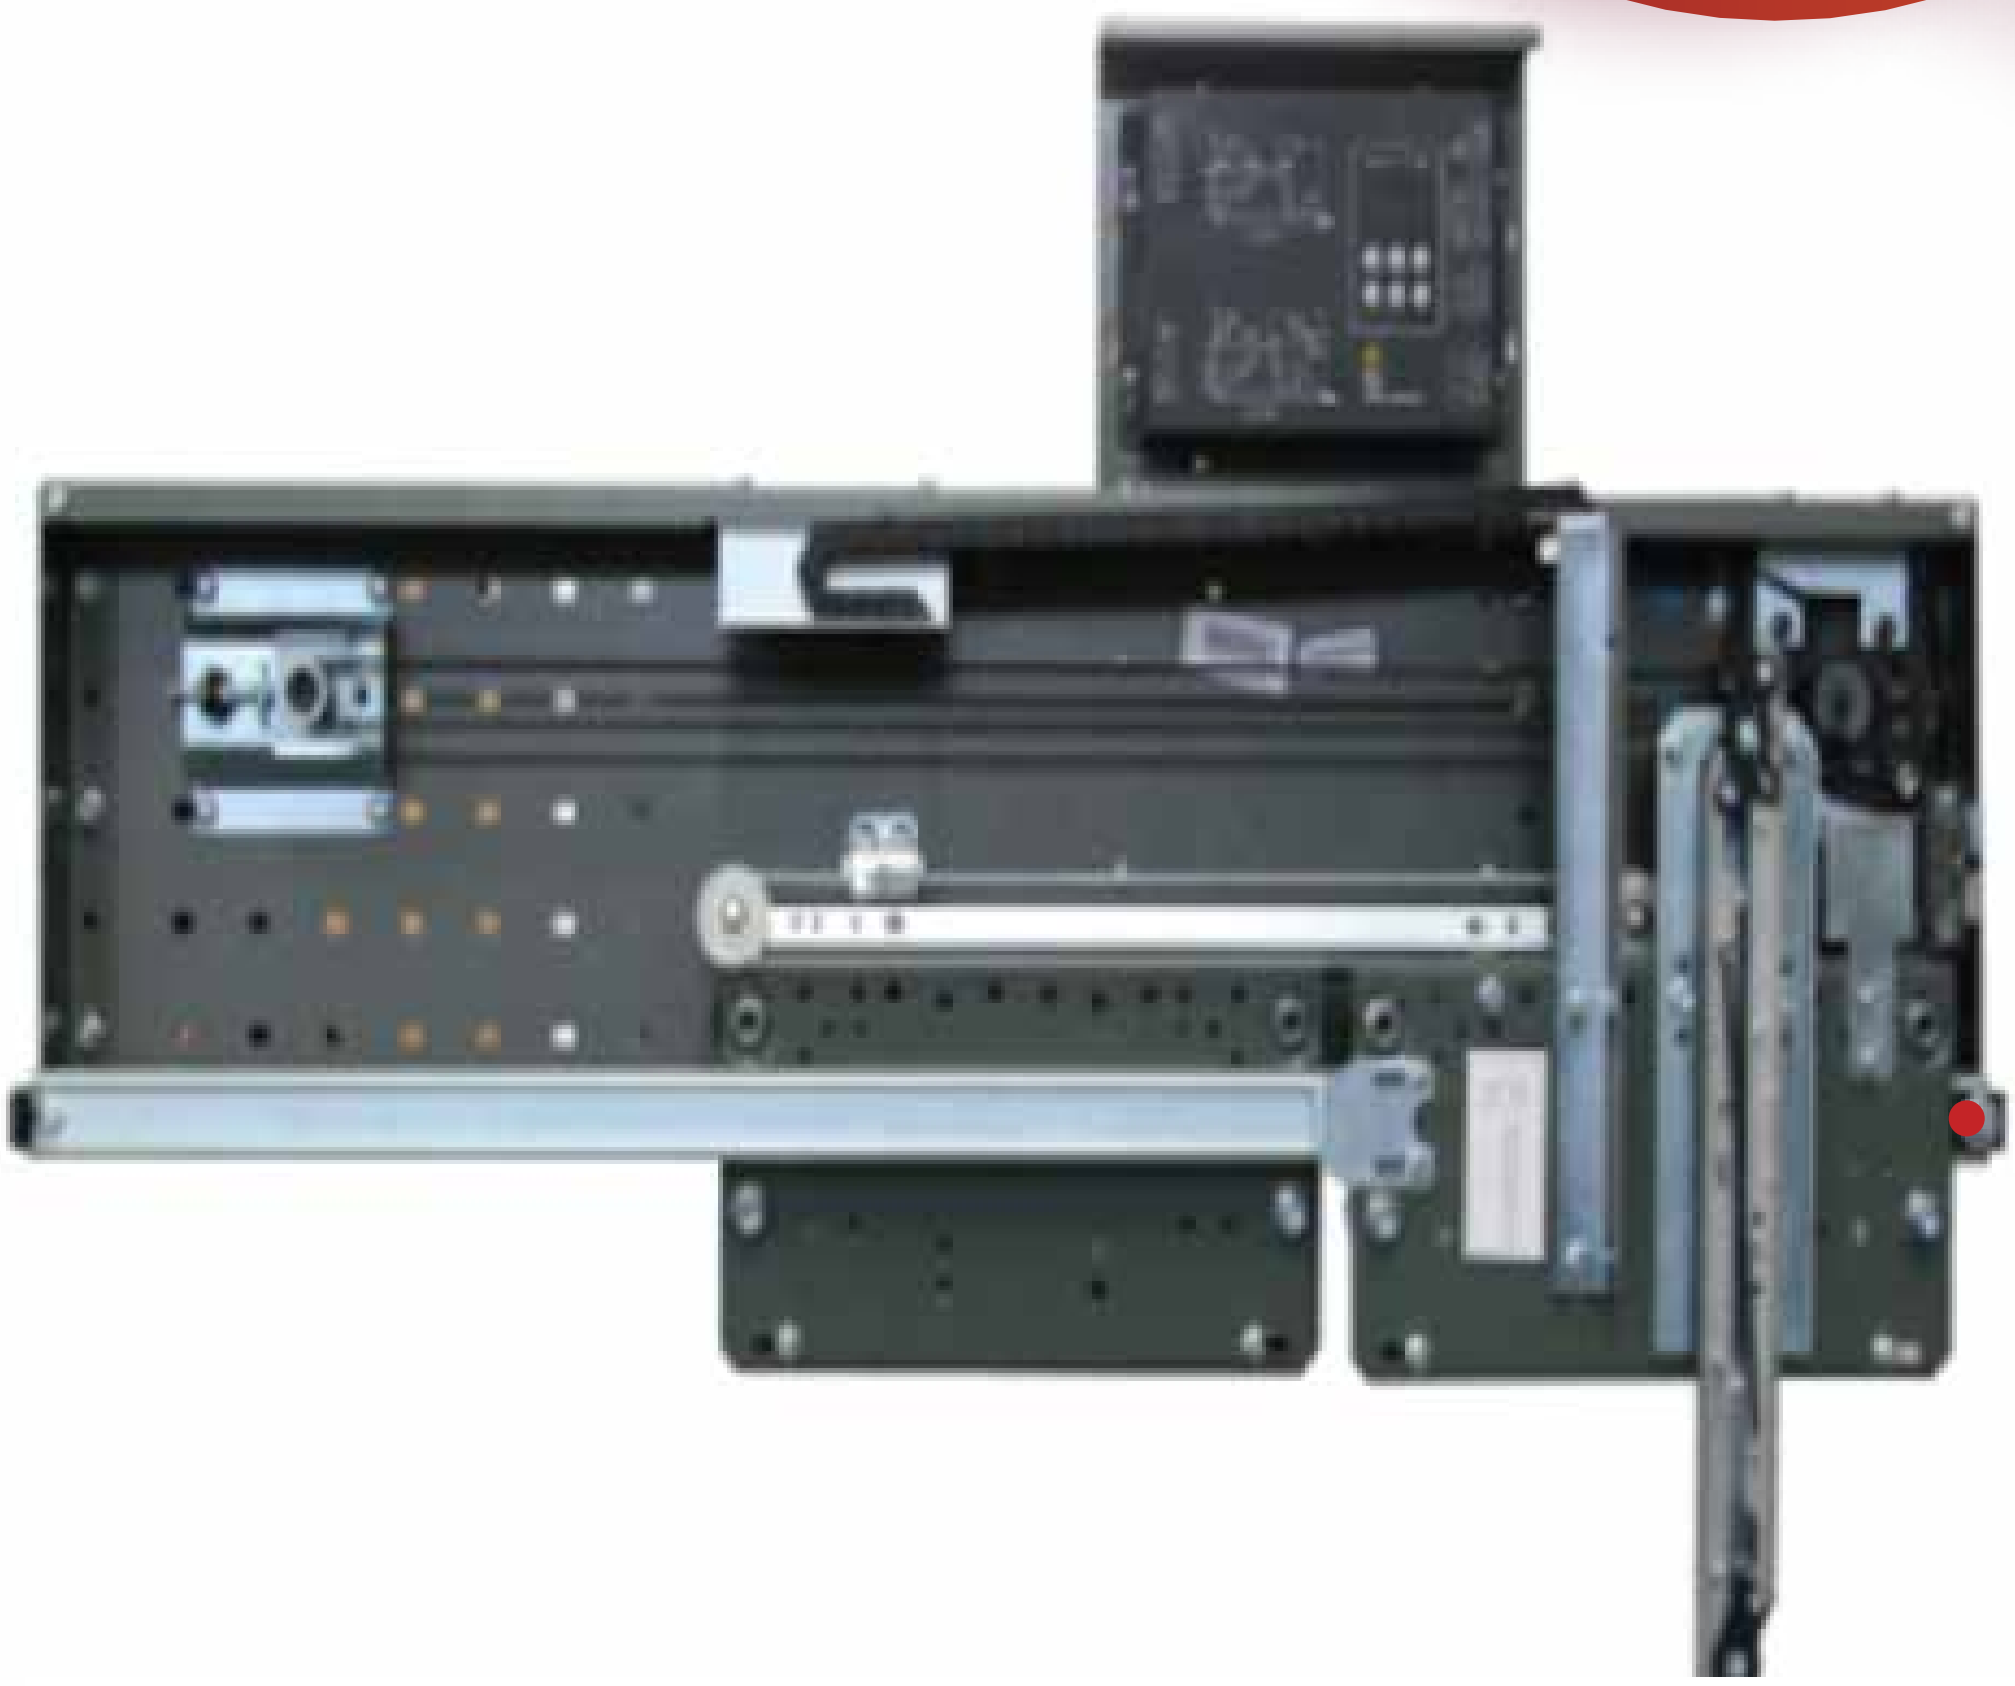

# Side Opening Door Operator

Product Name : Side Opening Door Operator

1) VVVF door operators controlled by the brand inverter.

2) Door opening way: center opening and side opening.

3) Door opening width: 600-2200 mm, height: 2000 or 2100mm.

4) Door panels and sill .

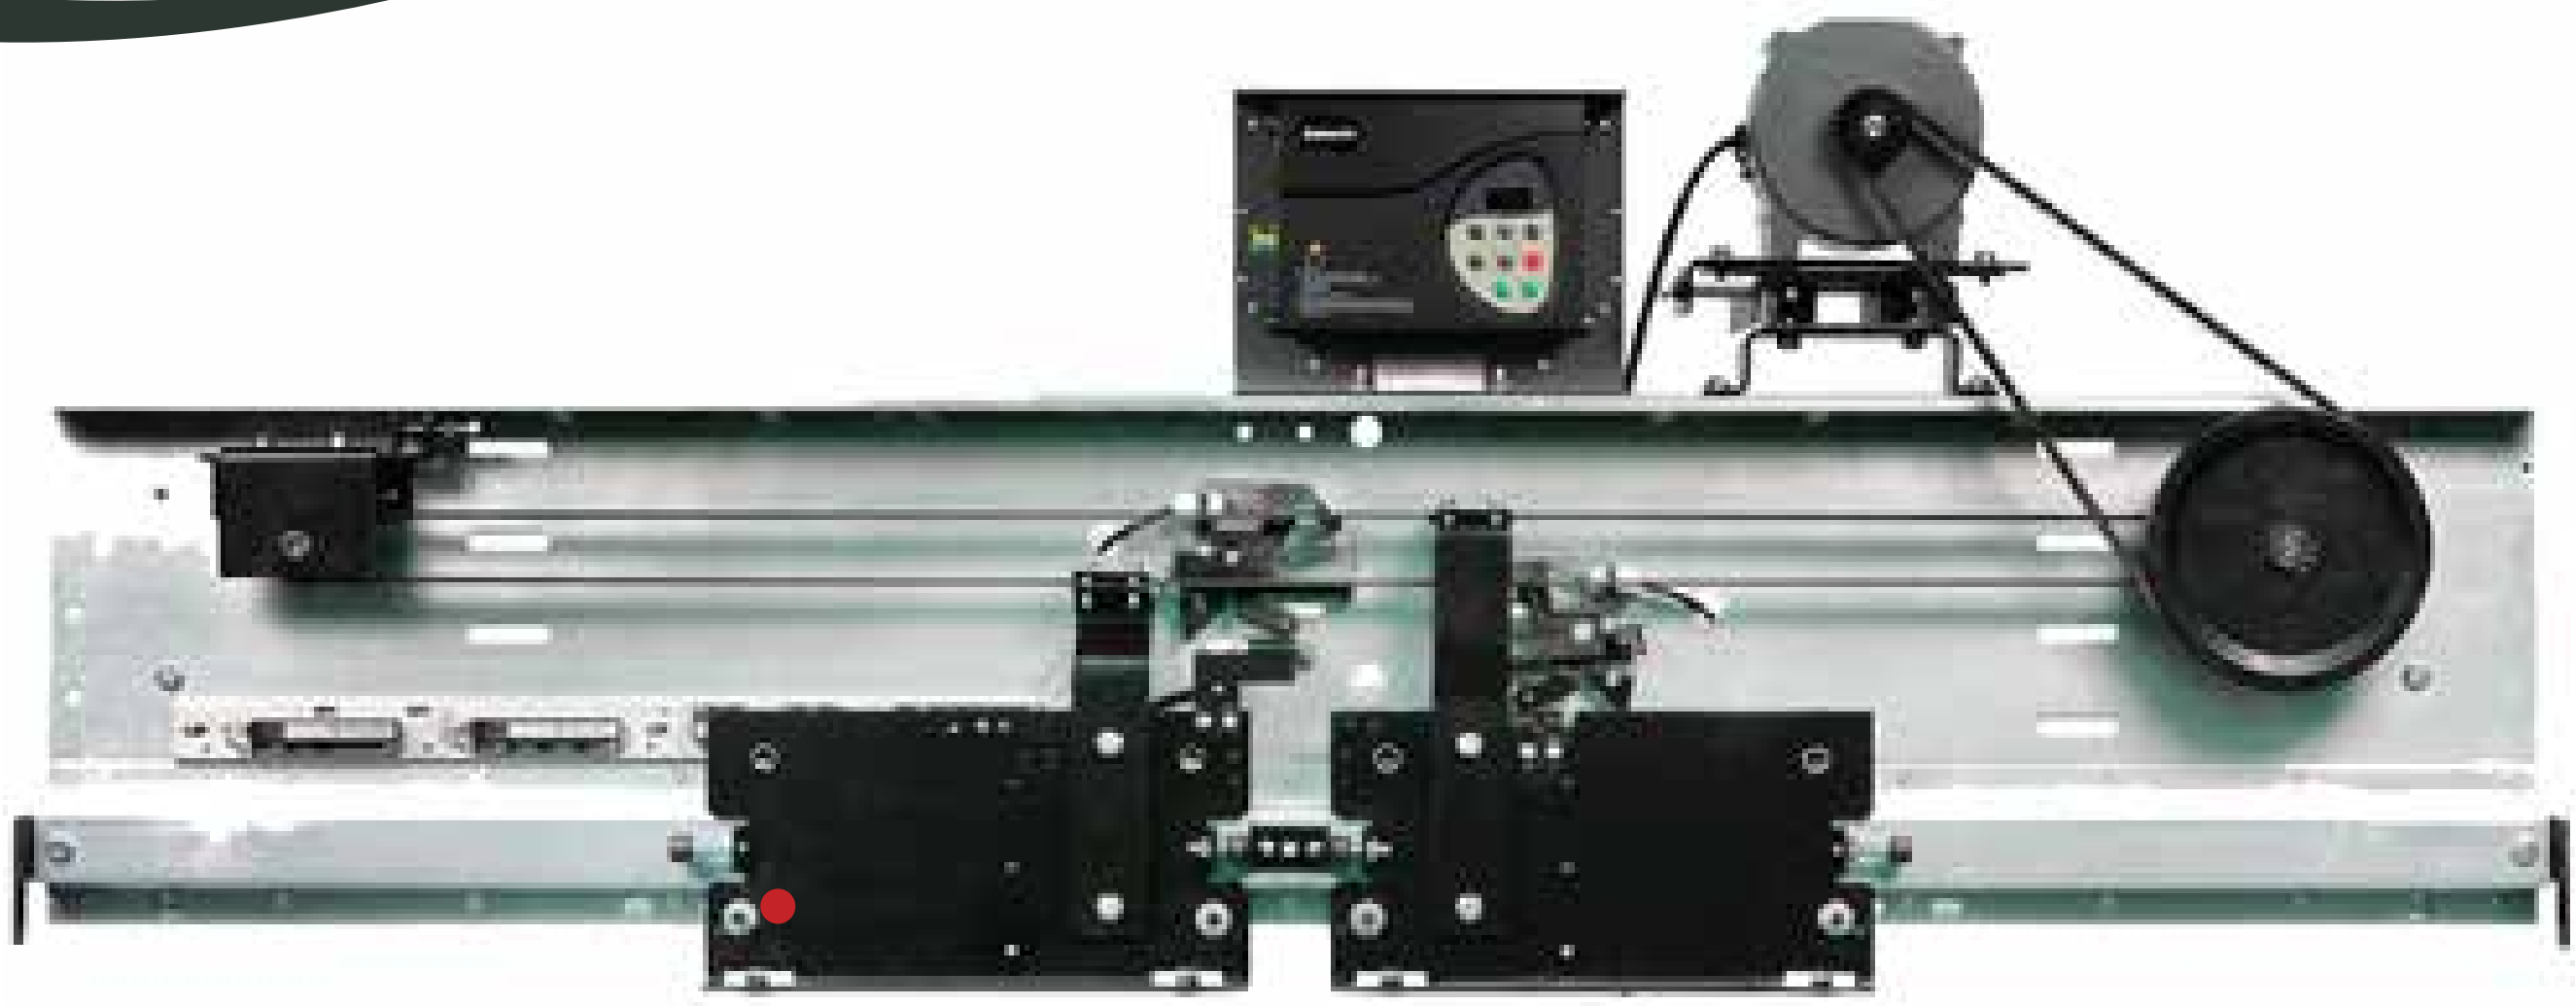

# Center Opening Door Operator

Product name : Center Opening Door Operator.

1) VVVF door operators controlled by the brand inverter.

2) Door opening way: center opening and side opening.

3) Door opening width: 600-2200 mm, height: 2000 or 2100mm.

4) Door panels and sill.

# Side Opening Landing Device

Product name : Side opening landing Device

1) Landing door match for the door operator.

2) Door opening way: center opening and side opening.

3) Door opening width: 600-2200 mm, height: 2000 or 2100mm.

4) Door panels,sill & door frame .

## Description

If the elevator descends with excessive speed, the descending brake will be used to support the general descending safety gear, enable the safety gear, and stop the car, playing the role of descending over-speed protection.

If the elevator ascends with excessive speed, the over-speed switch can be turned off to cut off the power and stop the car, playing the role of ascending over-speed protection. The electromagnet switch can be used to detect the actuation of the speed governor, and detect the elevator.

Rated speed:≤ 1.75m/s

Wire rope diameter(mm): Φ6,Φ6.3,Φ8

Sheave diameter(mm): Φ240

Tension force:≥1000N

Super switch voltage grade:AC220V/DC24V

Switch voltage grade:AC220V/DC24V

Action magnet voltage grade:AC220V/DC24V

The remote control is available.

**Porducts can be packed in wooden cases and carton box**

| NO | Model | Rated Speed(M/S) | Rope Wheel Diameter | Speed Limit wire Rope | Tension(N) | Product Type | Installation Position |
|---|---|---|---|---|---|---|---|
| 1 | OX-240 | <=2.5 | 240 | 6/8/6.3 | 800-1500 | One Way | Car/Countweight Side |
| 2 | OX-240A | <=1.75 | 240 | 6/8/6.3 | 800-1500 | One Way | Car/Countweight Side |
| 3 | OX-240B | <=2.5 | 240 | 6/8/6.3 | 800-1500 | Two Way | Car/Countweight Side |
| 4 | OX-240E | <=0.63 | 240 | 6/8/6.3 | 800-1500 | Two Way | Car/Countweight Side |
| 5 | OX-240F | <=2.5 | 240 | 6/8/6.3 | 800-1500 | Two Way | Car/Countweight Side |
| 6 | OX-187 | <=1.0,1.75,2.0 | 200240300 | 6/6.3/8 | >=500 | Two Way | Car/Countweight Side |
| 7 | OX-186 | <=0.63 | 200 | 6 | >=500 | Two Way | Car/Countweight Side |
| 8 | OX-186A | <=0.4 | 150 | 6 | >=500 | Two Way | Car/Countweight Side |
| 9 | OX-208 | <=1.75 | 200 | 6 | 800-1500 | One Way | Car/Countweight Side |
| 10 | OX-208A | <=1.75 | 200 | 6 | 800-1500 | One Way | Car/Countweight Side |
| 11 | OX-001 | <=0.63 | 280 | 8 | >=500 | One Way | Car/Countweight Side |

## Description

ROPE FOR OVER SPEED GOVERNOR

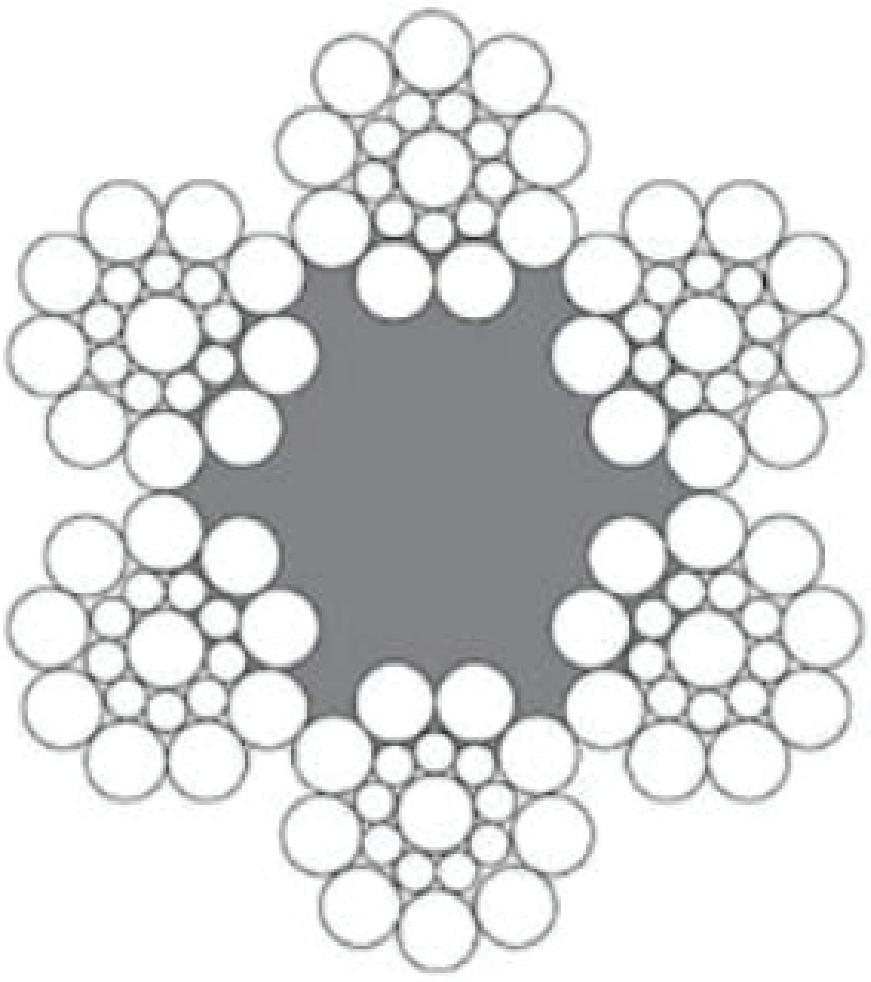

6*19S+PP

6*19W+PP

♦This rope is for low speed, low duty elevators.

♦If elevator with high speed, please contact us.

♦We can also produce as customer's requirements.

♦ Above specifications just for your reference. Error may occur in actual situation.

| Nominal Rope Diameter | 6*19S+PP | Minimum Breaking Load | | | |
|---|---|---|---|---|---|
| | | Dual Tensile, Mpa | | Single Tensile, Mpa | |
| | | 1370/1770 | 1570/1770 | 1570 | 1770 |
| mm | Kg/100m | kN | kN | kN | kN |
| 6 | 12.9 | 17.8 | 19.5 | 18.7 | 21 |
| 8 | 23 | 31.7 | 34.6 | 33.2 | 37.4 |

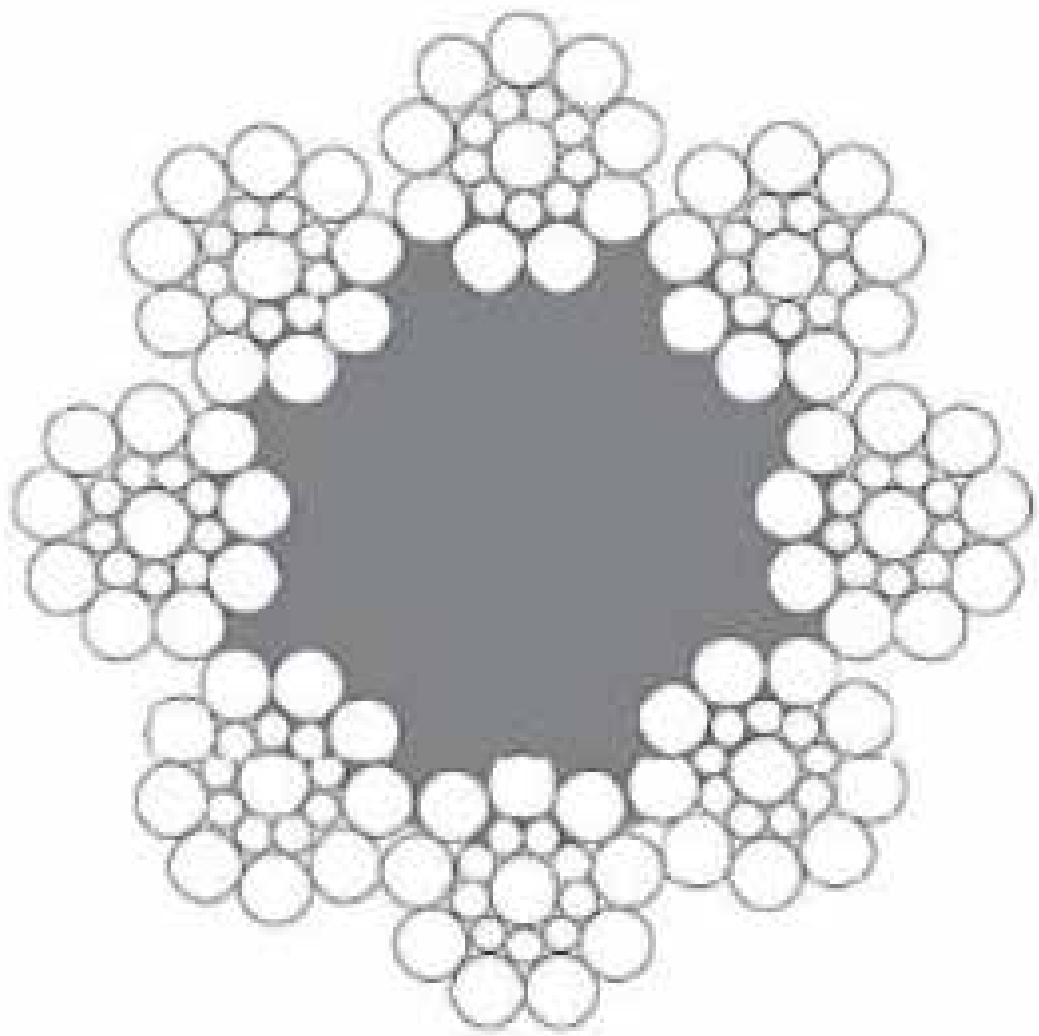

8*19S+FC

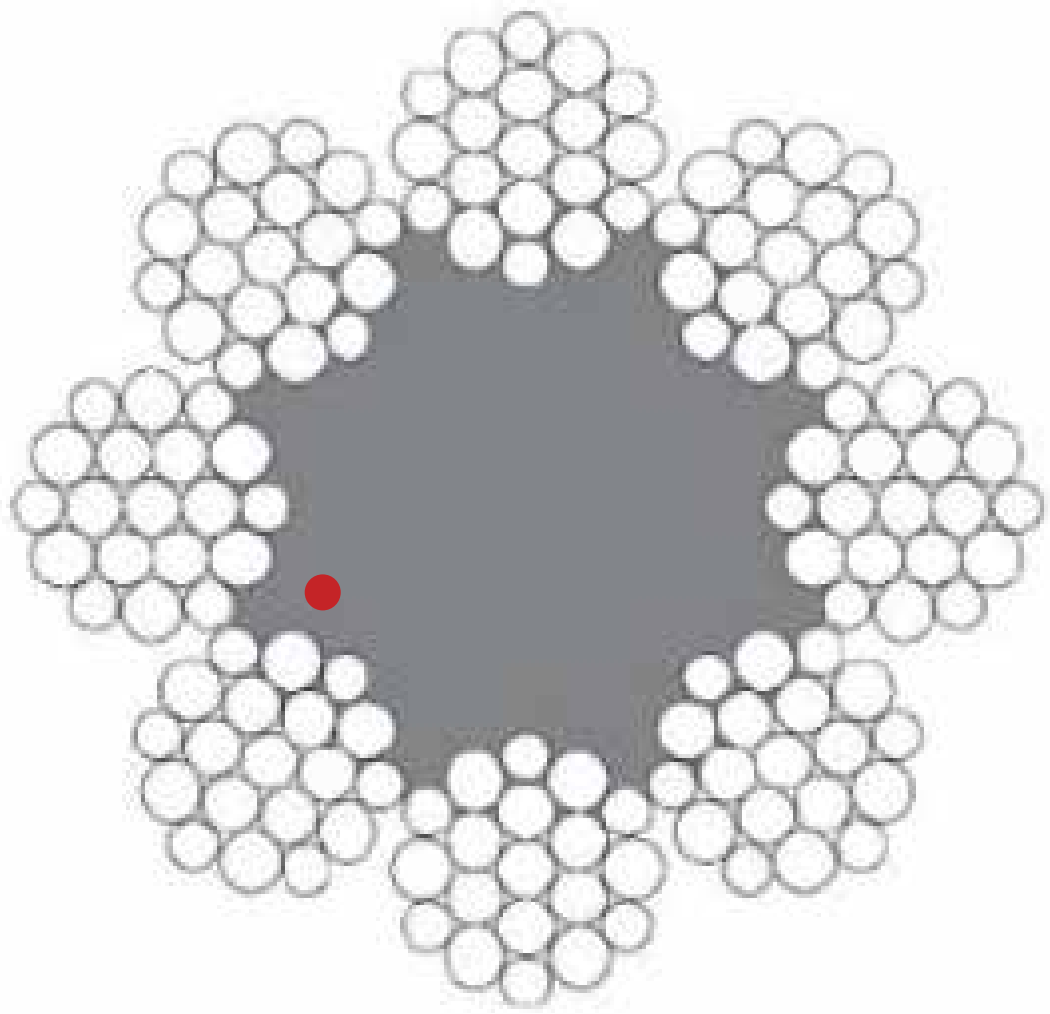

8*19W+FC

| Nominal Rope Diameter | Approx Weight | Minimum Breaking Load | | | |
|---|---|---|---|---|---|
| | | Dual Tensile, Mpa | | Single Tensile, Mpa | |
| | | 1370/1770 | 1570/1770 | 1570 | 1770 |
| mm | Kg/100m | kN | kN | kN | kN |
| 8 | 21.8 | 28.1 | 30.8 | 29.4 | 33.2 |
| 9 | 27.5 | 35.6 | 38.9 | 37.3 | 42 |
| 10 | 34 | 44 | 48.1 | 46 | 51.9 |
| 11 | 41.1 | 53.2 | 58.1 | 55.7 | 62.8 |
| 12 | 49 | 63.3 | 69.2 | 66.2 | 74.7 |
| 13 | 57.5 | 74.3 | 81.2 | 77.7 | 87.6 |
| 14 | 66.6 | 86.1 | 94.2 | 90.2 | 102 |
| 15 | 76.5 | 98.9 | 108 | 104 | 117 |
| 16 | 87 | 113 | 123 | 118 | 133 |
| 18 | 110 | 142 | 156 | 149 | 168 |
| 19 | 123 | 159 | 173 | 166 | 187 |
| 20 | 136 | 176 | 192 | 184 | 207 |
| 22 | 165 | 213 | 233 | 223 | 251 |

ROPE FOR TRACTION MACHINE

♦For IWRC, speed > 4.0m/s, Building height > 100m

♦For IWRF, 2.0 < speed≤4.0m/s, Building height≤ 100m



8*19S+IWRF



8*19W+IWRF



8*19S+IWRC



8*19W+IWRC

| Nominal Rope Diameter | Approx Weight | | Minimum Breaking Load | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Dual Tensile, Mpa | | | | Single Tensile, Mpa | | | | | |
| | | | 1370/1770 | | 1570/1770 | 1620/1770 | 1570 | | 1620 | | 1770 | |
| | IWRC | IWRF | IWRC | IWRF | IWRC | IWRF | IWRC | IWRF | IWRC | IWRF | IWRC | IWRF |
| mm | Kg/100m | | kN | | kN | | kN | | kN | | kN | |
| 8 | 26 | 25.9 | 35.8 | 35.2 | 38 | 37.4 | 35.8 | 35.2 | 36.9 | 35.2 | 40.3 | 39.6 |
| 9 | 33 | 32.8 | 45.3 | 44.5 | 48.2 | 47.3 | 45.3 | 44.5 | 46.7 | 45.9 | 51 | 50.2 |
| 10 | 40.7 | 40.5 | 55.9 | 55 | 59.5 | 58.5 | 55.9 | 55 | 57.7 | 56.7 | 63 | 62 |
| 11 | 49.2 | 49 | 67.6 | 66.5 | 79.1 | 70.7 | 67.6 | 66.5 | 69.8 | 68.6 | 76.2 | 75 |
| 12 | 58.6 | 58.3 | 80.5 | 79.1 | 85.6 | 84.2 | 80.5 | 79.1 | 83 | 81.6 | 90.7 | 89.2 |
| 13 | 68.8 | 68.4 | 94.5 | 92.9 | 100 | 98.8 | 94.5 | 92.9 | 97.5 | 98.5 | 106 | 105 |
| 14 | 79.8 | 79.4 | 110 | 108 | 117 | 115 | 110 | 108 | 113 | 111 | 124 | 121 |
| 15 | 91.6 | 91.1 | 126 | 124 | 134 | 132 | 126 | 124 | 130 | 128 | 142 | 139 |
| 16 | 104 | 104 | 143 | 141 | 152 | 150 | 143 | 141 | 148 | 145 | 161 | 159 |
| 18 | 132 | 131 | 181 | 178 | 193 | 189 | 181 | 178 | 187 | 184 | 204 | 201 |
| 19 | 147 | 146 | 202 | 198 | 215 | 211 | 202 | 198 | 208 | 205 | 227 | 224 |
| 20 | 163 | 162 | 224 | 220 | 238 | 234 | 224 | 220 | 231 | 227 | 252 | 248 |
| 22 | 197 | 196 | 271 | 266 | 283 | 283 | 271 | 266 | 279 | 274 | 305 | 300 |

We offer sisal, synthetic and steel IWRC ropes. Synthetic plastic cores are more precise in diameter, offer more stability in form and are more resistant to humid environments. Independent Wire Rope Core (IWRC) ropes have less stretch and create a firmer structure to the rope diameter.

All ropes are pre-lubricated during the stranding phase of production. Properly lubricated ropes can almost double the service life of the rope. Lubrication helps prevent corrosion, abrasion and rouging.

Some types and sizes of wire rope including diameter, fiber and weight are in here: Steel wire rope is widely used in many fields.

## □ core module introduction

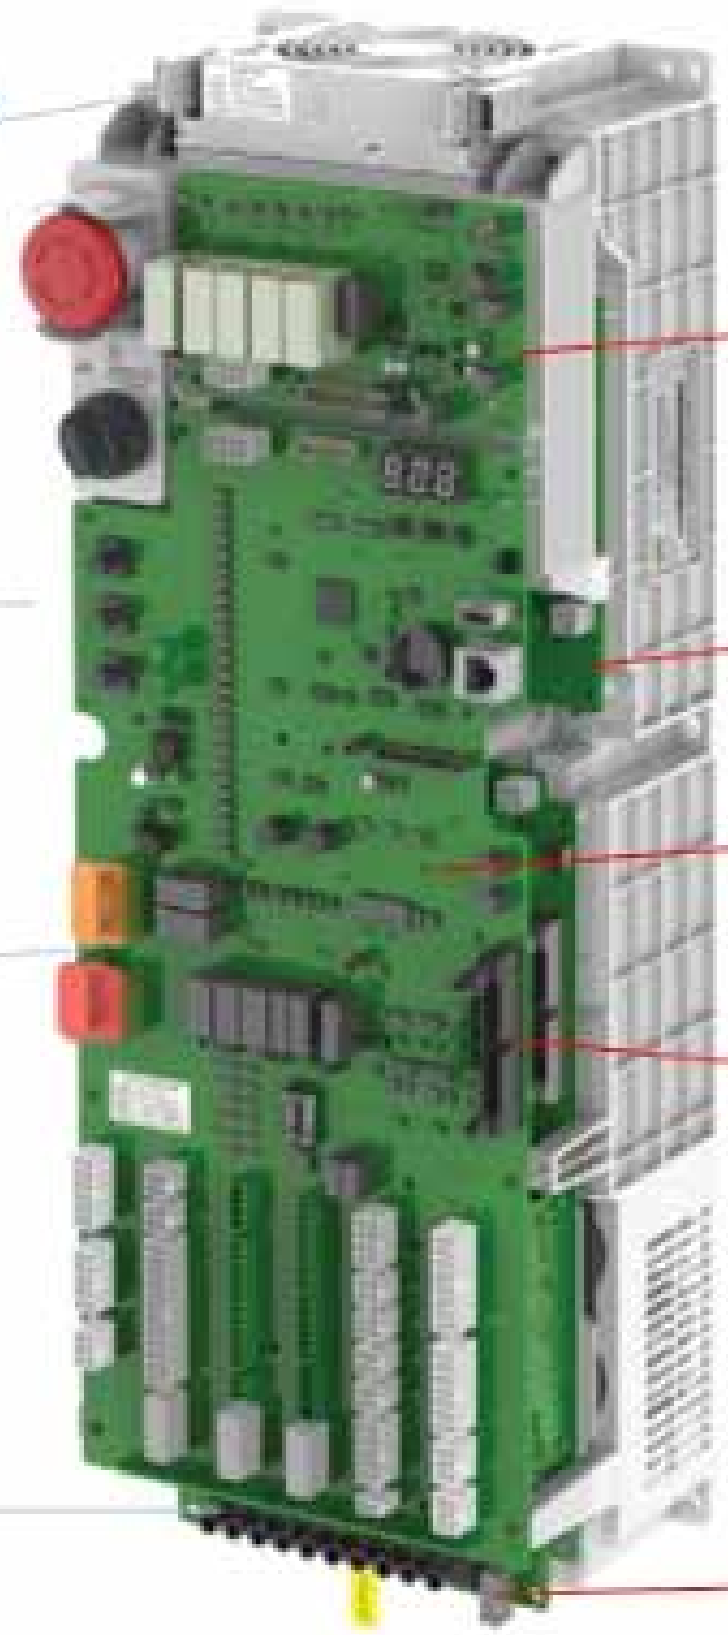

FAN (removable)

Emergency stop button ( micro button

UCMP and bypass function/ emergency operation

input cable terminal

SCB-A4/D4

Power module

PG-E/A2 card

drive and mother board link cable

link up to communication type encoder

**Product composition**

| TYPE | Core module | machine room cabinet | Machine roomless cabinet | Machine room module | brake resistor |
|---|---|---|---|---|---|
| **Picture** |  |  |  |  |  |
| **size MM** | 542*185*170 | 900*230*190 | 1730*230*190 | 770*230*190 | 542*185*170 |
| **weight KG** | 5.3KG | 16KG | 27KG | 11KG | 4.2KG |

**Electrica Parameter :**

| Nornal Cabinet | | Comparision | NEW Generation Cabinet"To morrow" | |
|---|---|---|---|---|
| Power range | Current | **3 phase 380V only** | Power range upto | Current |
| 3.7kw | 9 A | new cabinet 8.3kw can cover from 3.7-7.5kw | 8.3kw | 20A |
| 5.5kw | 13A | | | |
| 7.5kw | 18A | | | |
| 11kw | 27A | new cabinet 8.3kw can cover from 11-15kw | 17.6kw | 35A |
| 15kw | 33A | | | |

Wider scope of motor Amp selection

1. More integrated size,cancel the design of controller as integrated cabinet.

2.Design machine roomless type cabinet, only add machine roomless module and make machine room cabinet to become machine roomless.

3.Anti copy machine intellegent chip cut the communication from copy machine to original.

4.Motor auto learning and data memorize,make site tuning free possible.


## Elevator Controller

Controller manufactures products used as components in a wide variety of industrial systems and equipment.

## Description

| Power (KW) | Input Current (A) | Output Current (A) | Resistor | | Filter | Braking Unit |
|---|---|---|---|---|---|---|
| 3.7 | 10.4 | 9.2 | 1000W/72 | 1 nos | 20A | Built-in |
| 5.5 | 15 | 14.8 | 1000W/72 | 1 nos | 20A | |
| 7.5 | 20 | 18 | 1000W/72 | 2 nos | 36A | |
| 11 | 29 | 24 | 1000W/70 | 2 nos | 36A | |
| 15 | 39 | 31 | 1500W/70 | 3 nos | 50A | |
| 18.5 | 44 | 39 | 1500W/70 | 3 nos | 50A | |
| 22 | 43 | 45 | 2500W/65 | 3 nos | 50A | |
| 30 | 58 | 60 | 2500W/65 | 3 nos | 65A | |
| 37 | 71 | 75 | 2000W/70 | 6 nos | 80A | 2 nos |
| 45 | 86 | 91 | 1500W/70 | 8 nos | 100A | 2 nos |

- Drive:  L1000-Series Drive
- BCD: Binary Coded Decimal
- H: Hexidecimal Number Format
- IGBT: Insulated Gate Bipolar Transistor
- kbps: Kilobits per Second
- MAC: Media Access Control
- Mbps: Megabits per Second
- PG: Pulse Generator
- r/min: Revolutions per Minute
- V/f: V/f Control
- OLV: Open Loop Vector Control
- CLV: Closed Loop Vector Control
- CLV/PM: Closed Loop Vector Control for PM
- PM motor: Permanent Magnet Synchronous motor (an abbreviation for IPM motor or SPM motor)
- IPM motor: Interior Permanent Magnet Motor (e.g., SSR1 Series and SST4 Series motors)
- SPM motor: Surface mounted Permanent Magnet Motor (e.g.,  SMRA Series motors)

# Elevator Car & Counterweight Frame

Product Name:Car& Counterweight Frame

The car frame is a steel structure to support lift platform and the door. A safety device is built underneath the frame to instantly grip and stop the elevator if it overspeeds.

## Description

| | |
|---|---|
| For Passenger Elevator | Oil Can (2 PCS) |
| For different roping 1:1, 2:1 | Guide Shoe (4 PCS) |
| For different capacities from 320kg to 2000kg | Lifting Pulling Rod For Safety Gear (1 PC) |
| For different dimensions of DBG | Safety Gear (1 PAIR) |
| Easy Installation | Safety Gear Linkage (1 PAIR) |
| Standard export package | Safety Gear Switch (1 PC) |

Our car frames are designed using best grade steel and tested for cracks, fractures and load resistance. The fine finish and precision allows you to install these frames without any trouble. Equipped with instantaneous safety features,our elevator car frames are designed for utmost safety of the passengers. You can reach out to our engineers with your specific needs and we will deliver exact solutions. We will also extent professional support during installation and post installation.

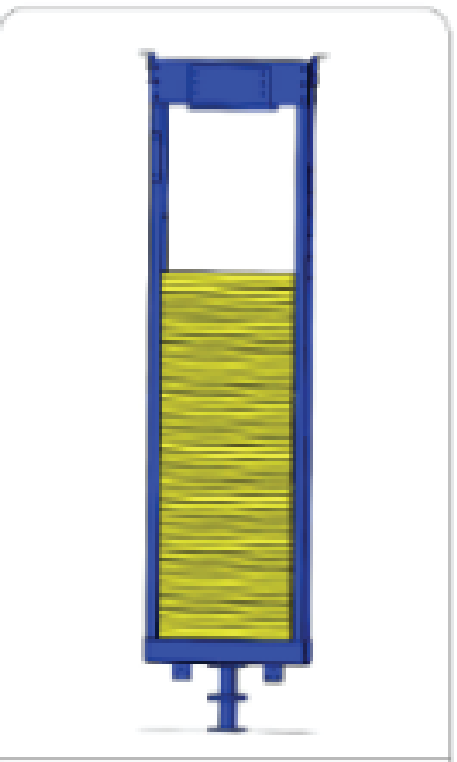

Roping= 1:1

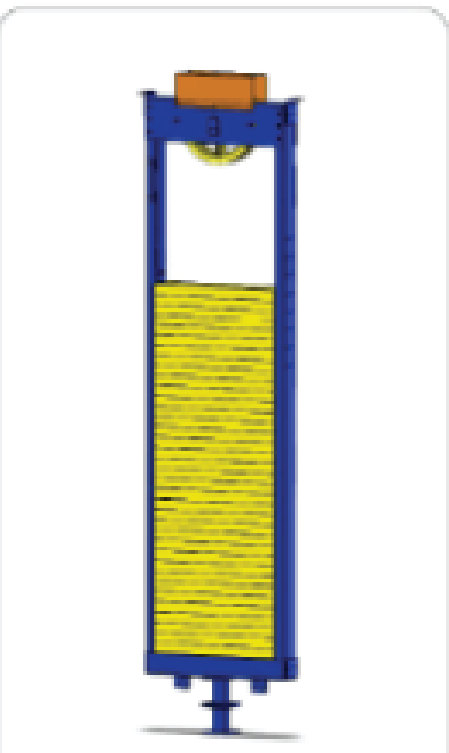

Roping=2:1

Standard counterweight frame includes several assemblies listed as below:

♦Oil can

♦Guide shoe

♦Counterweight frame

♦Lock device

♦Buffer striking end

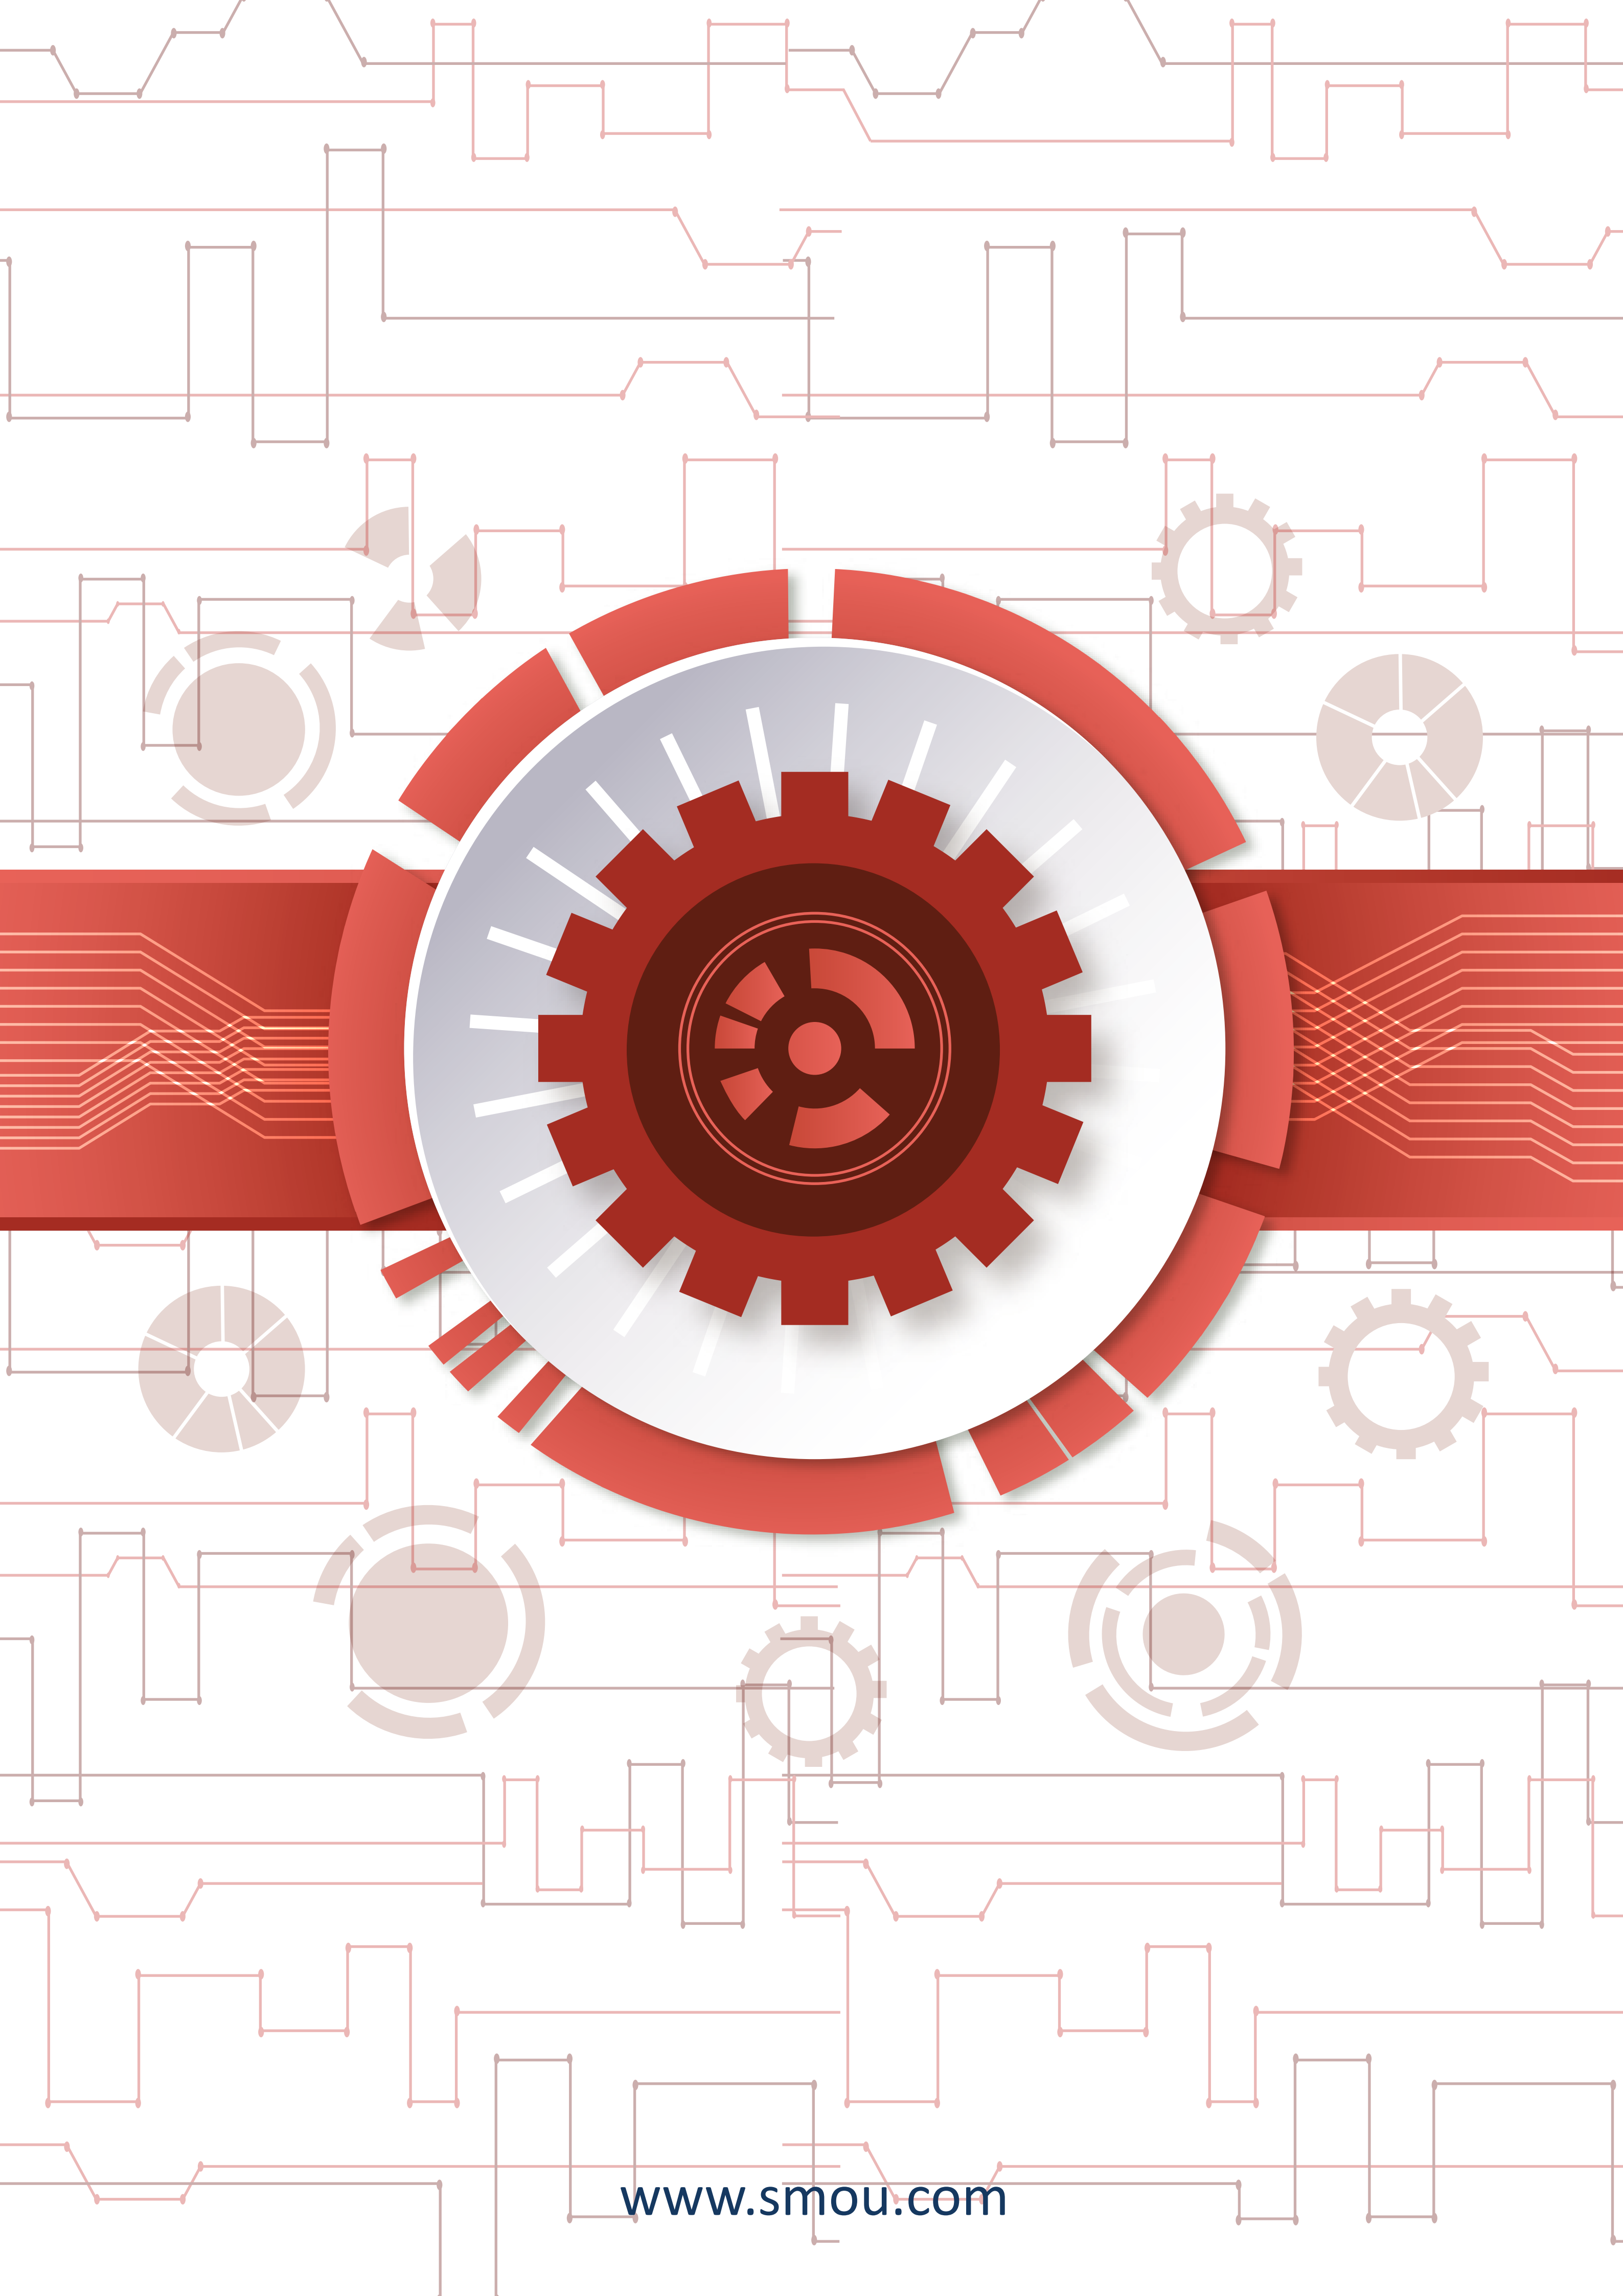

www.smou.com